



## ENVIRONMENTAL CONTROL AND PERSONNEL COMFORT FOR INTERIOR OPENING HEIGHTS UP TO 7' (84") HIGH

### SIZES




### FEATURES

- 1/3 Horsepower, two-speed motors
- Built in high/low/off switch
- Housing, grill and nozzle are 304 series stainless steel
- Aluminum blower wheels
- Housing finish is available in stainless steel or powder coated white (36" and 42" only)
- Heavy duty directional vane
- All units are 120 V, single-phase, and can be plugged into a standard Type-B outlet
- Stainless steel (-SS) units up to 60" wide are NSF listed for interior use on openings up to 84" high
- One-year parts warranty
- Low noise levels (67 dBA low speed)
- Separate mounting plate for easy installation


### PERFECT FOR

- Foodservice Doors
- Hotel Entrances
- Convenience Store Doors
- Food Manufacturing Entrances
- Retail Food Store Doors
- Commercial Kitchen Entrances

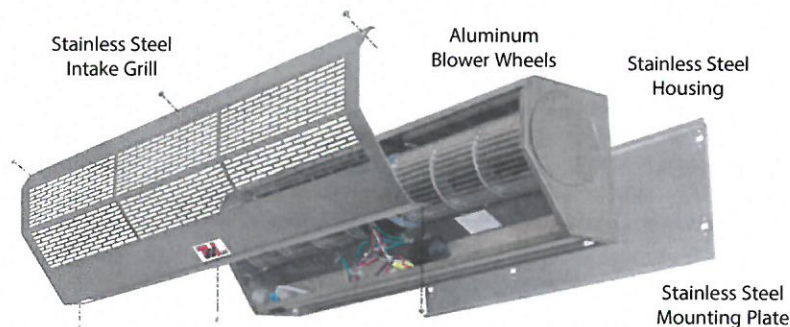

MODEL	AP-2-24-1		AP-2-36-1		AP-2-42-1		AP-2-48-1*		AP-2-60-1*		AP-4-72-2*	
Nozzle Width	22.50"		34.50"		38.50"		46.25"		58.00"		69.50"	
Number of Motors	1		1		1		1		1		2	
Horsepower per Motor	1/3		1/3		1/3		1/3		1/3		1/3	
Motor Speed	High	Low	High	Low	High	Low	High	Low	High	Low	High	Low
Amp Draw	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	6.4	6.4
Capacity	.500 kW	.495 kW	.500 kW	.495 kW	.650 kW	.645 kW	.650 kW	.645 kW	.800 kW	.795 kW	1.000 kW	.990 kW
Maximum FPM at Nozzle	3150	2560	3150	2560	3150	2560	3150	2560	3150	2560	3150	2560
CFM at Nozzle	810	660	1220	990	1360	1100	1860	1520	2330	1890	2440	1980
Weight (lbs)	30		43		47		62		75		86	

\* Only available in stainless steel.

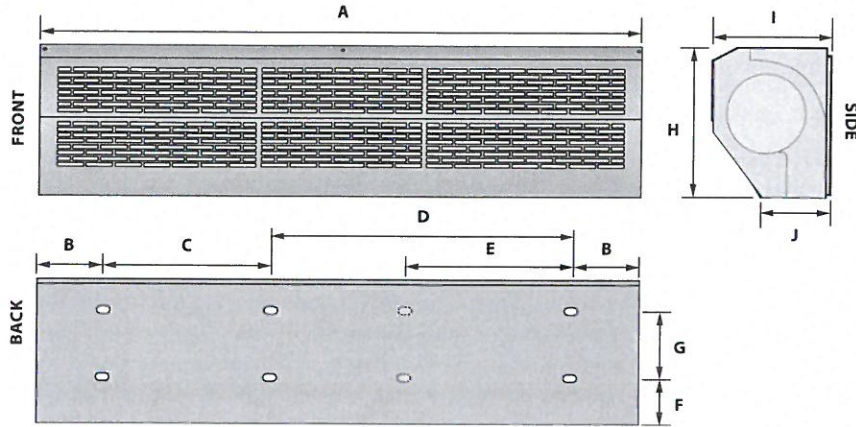


MODEL	A: OVERALL WIDTH	H: HEIGHT	I: OVERALL DEPTH	J: DEPTH
AP-2-24-1	23.50"	10.00"	8.50"	5.00"
AP-2-36-1	35.50"	10.00"	8.50"	5.00"
AP-2-42-1	39.50"	10.00"	8.50"	5.00"
AP-2-48-1	47.25"	10.00"	8.50"	5.00"
AP-2-60-1	59.00"	10.00"	8.50"	5.00"
AP-4-72-2	69.50"	10.00"	8.50"	5.00"

MODEL	B: MOUNTING HOLE WIDTH 1	C: MOUNTING HOLE WIDTH 2	D: MOUNTING HOLE WIDTH 3	E: MOUNTING HOLE WIDTH 4	F: MOUNTING HOLE HEIGHT 1	G: MOUNTING HOLE HEIGHT 2
AP-2-24-1	0.75"	21.75"	N/A	N/A	2.00"	5.75"
AP-2-36-1	1.00"	11.50"	22.00"	N/A	2.00"	5.75"
AP-2-42-1	1.00"	11.50"	22.00"	N/A	2.00"	5.75"
AP-2-48-1	1.00"	17.00"	28.00"	17.50"	2.00"	5.75"
AP-2-60-1	1.00"	22.50"	33.50"	22.50"	2.00"	5.75"
AP-4-72-2	1.50"	22.00"	46.00"	22.00"	2.00"	5.75"

## BENEFITS

- Substantially reduces energy costs
- Recirculates warm or cool air inside the building
- Blocks outside drafts, flying insects and airborne pollutants
- Smaller units are perfect for take-out service windows

### STANDARD AIR-PRO® EQUIPMENT



All Air-Pro® air curtains run on 120 volts and have single-phase motors, which means they plug into standard Type-B grounded wall outlets for a quick and easy installation.



The Air-Pro® is easy to operate. Each unit has a two-speed motor with a built in high/low/off rocker switch. There is also an adjustable directional vane that allows regulation of the air flow direction.



An automatic door plunger switch is supplied with every Air-Pro® unit. This switch allows the air curtain to be instantly turned on when the door is opened and turned off when the door is closed.

A heavy-duty roller switch is also available as an option.

