


Cleantank

Models:

CXP001 – 40 Gallons

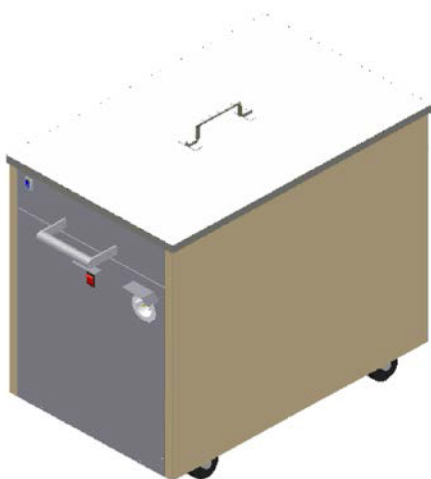

Standard Features:





- Double walled stainless steel tank
- Interior basket lifts items out of water and rests on interior tank wall pegs for safe handling of equipment
- 40 gallon capacity
- Recommended operating temperature 160-165 degrees F
- Electrically heated
- Thermostatically controlled
- 8 foot power cord
- Twist lock connector for easy power cord replacement
- 1 year parts and 90 day labor warranty
- Easy draining with durable 1" ball valve
- Low profile - slides under most counters
- Manufactured by H&K International

Specifications:

- Voltage: 120V Amps: 8.3A Shipping Weight: 194LBS
- Tank Exterior: 304 stainless steel (minimum 14 gauge) double walled construction. 1" brass ball valve for easy draining. Heavy duty casters and caster wheels. Lid insulated with polystyrene.
- Tank Interior: Basket made from 16 gauge stainless steel.
- Tank Electrical: 8 foot 20A, 125VAC Plug, Jacketed Cordage 12/3 AWG, 660V, 105 degree C, Mating Twistlock Connector 20A, 125VAC and Appliance Inlet 20A, 125VAC. Switch with indicator and cover, DPST, contacts rated 250V, 16 A, with cover, max temperature 65°C. Incoloy Heater Element, 120VAC, 1000W, threaded. Adjustable Bimetal Thermostat, SPST, 30A, 250V, 120°F - 180°F. NEMA 5-20P



Cleantank

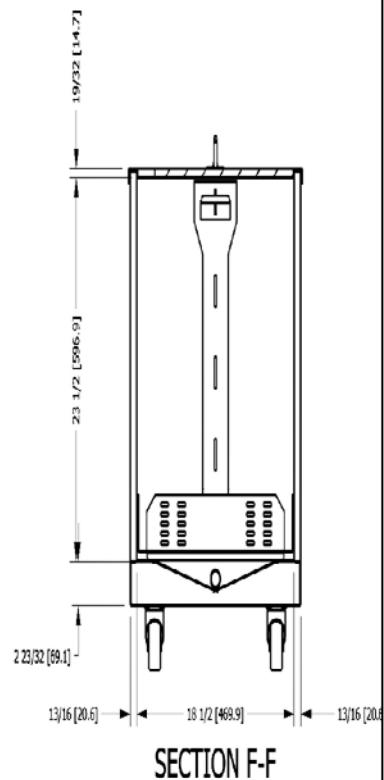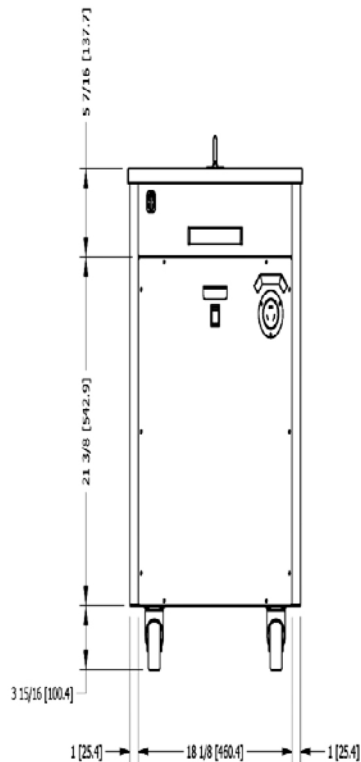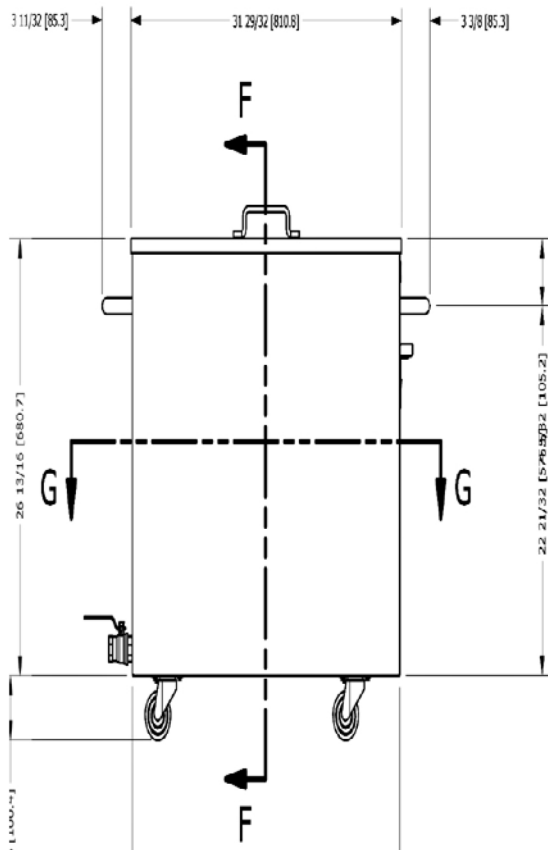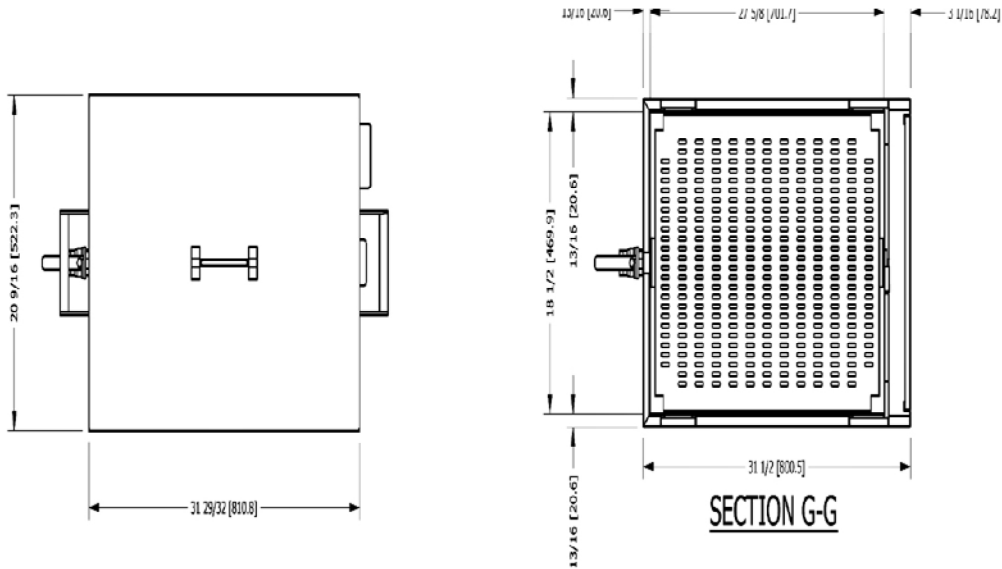





CleanX-press

Carbon & Grease Removal Specialists


Cleantank

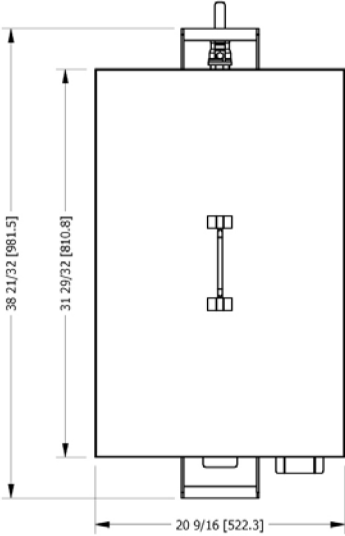


PLAN VIEW

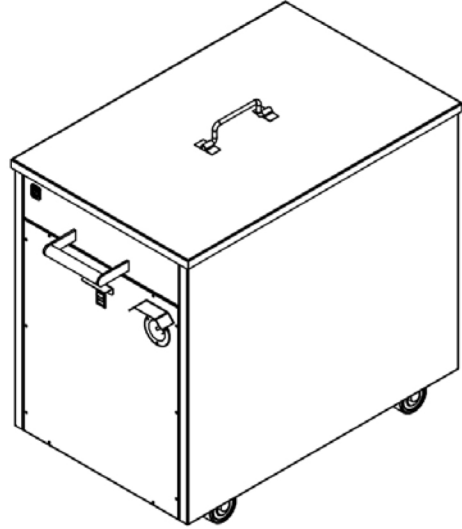

ISOMETRIC VIEW

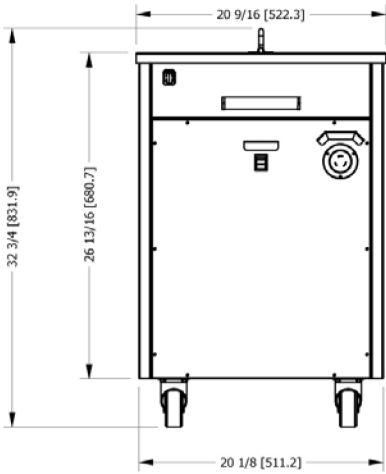

FRONT VIEW

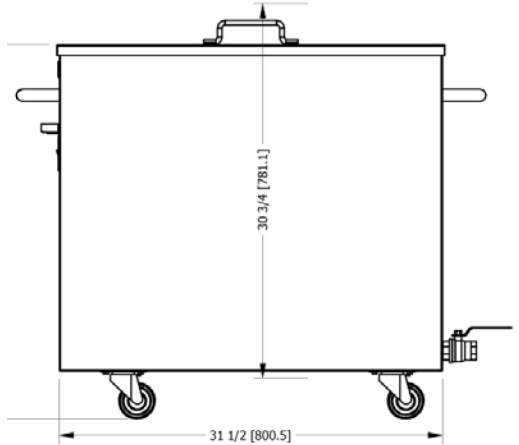

END VIEW