



18600VD

Versa Drawer™

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

18600VD: Versa Drawer™

Models

- 18650VDL 50" Versa Drawer with (2) 32" drawers and compressor on the left
- 18650VDR 50" Versa Drawer with (2) 32" drawers and compressor on the right
- 18682VDL 82" Versa Drawer with (4) 32" drawers and compressor on the left
- 18682VDR 82" Versa Drawer with (4) 32" drawers and compressor on the right
- 18650VDL-CE 50" Versa Drawer with (2) 32" drawers and compressor on the left, CE approved
- 18650VDR-CE 50" Versa Drawer with (2) 32" drawers and compressor on the right, CE approved
- 18682VDL-CE 82" Versa Drawer with (4) 32" drawers and compressor on the left, CE approved
- 18682VDR-CE 82" Versa Drawer with (4) 32" drawers and compressor on the right, CE approved



18682VDL
18682VDL-CE

Standard Features

- 4 temperature operation—each drawer is completely independent and can operate as a refrigerator, freezer, chiller or thaw cabinet at any time
- Easy to use microprocessor control with push button function selection
- Alarm notifications and service diagnostics
- Heavy-gauge stainless steel top
- Standard on 6" casters
- Mechanical access on compressor end of unit
- 32" heavy duty full extension drawers with (2) 12"x20" pan capacity per drawer
- NSF 7 certified
- High density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam throughout
- Dart style quick change gaskets
- 8' long electrical cord
- Environmentally friendly HFC-404A refrigerant
- 34" ADA height standard
- One year parts, one year labor and 5 year compressor warranty

Options & Accessories

- Stainless steel back
- 6" legs

Specifications

Exterior Top: Constructed of one-piece heavy-gauge stainless steel with integral 2.12" (5.4cm) high square nosing at front.

Exterior Sides, Back and Bottom: heavy-gauge stainless steel sides with removable stainless steel mechanical access panel on compressor end. Back and bottom are constructed of galvanized steel.

Interior of each drawer section is a polyethylene rotocast liner with ABS drawer front liners

Drawers: Heavy-gauge stainless steel exterior front, with a thermoformed ABS plastic interior liner. Frame and tracks are constructed of 11 and 12-gauge stainless steel. Roller track assemblies have self-lubricating Delrin™ rollers.


Refrigeration System: Environmentally friendly HFC-404A refrigerant. Each independent drawer has its own evaporator coil with expansion valve. Digital control acts as thermometer, thermostat and diagnostic center for each drawer. Hot gas defrost system is also utilized during thaw operation.

Electrical Connections: Two electrical configurations are available: 115 volt, 60 Hertz, single phase and 230 volt, 50 Hertz, single phase. Unit is wired with 3-wire, grounded, maximum 8' (2.4m) cord and plug.


The Delfield Versa Drawer is a unique food holding device that includes an open food container disposed within a refrigerated cabinet such that both the container and interior of the cabinet are exposed to the same refrigerated environment, thereby eliminating the need for conventional dual environment systems which refrigerate food disposed within insulated, closed containers, while maintaining the interior of the cabinet at ambient temperature.




Only Models
18650VDL-CE,
18650VDR-CE,
18682VDL-CE &
18682VDR-CE

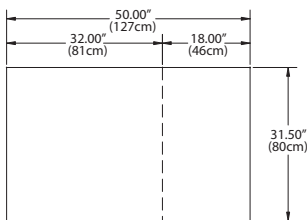


Plan View
18650VDR, 18650VDR-CE

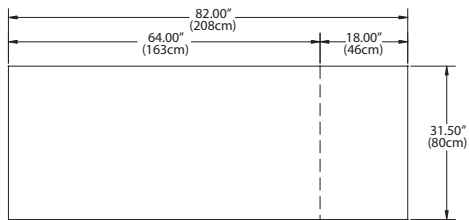


Plan View
18682VDR, 18682VDR-CE




Elevation View
18650VDR, 18650VDR-CE

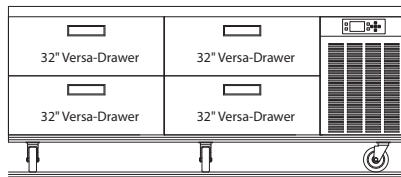


Elevation View
18682VDR, 18682VDR-CE

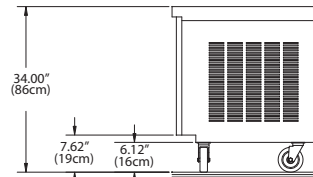


Right End View
18650VDR, 18650VDR-CE,
18682VDR, 18682VDR-CE

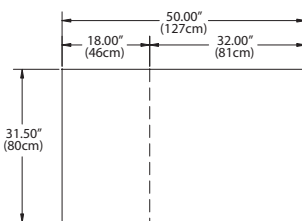


Plan View
18650VDL, 18650VDL-CE

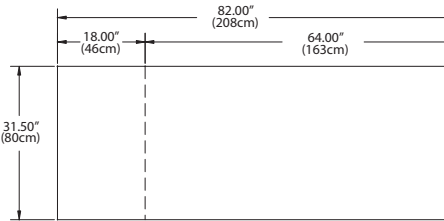


Plan View
18682VDL, 18682VDL-CE

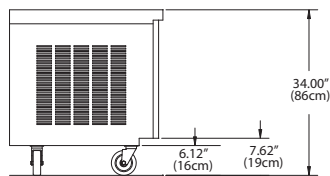

Left End View
18650VDL, 18650VDL-CE,
18682VDL, 18682VDL-CE

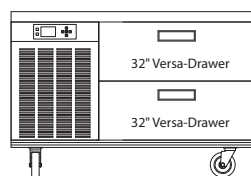

Elevation View
18650VDL, 18650VDL-CE

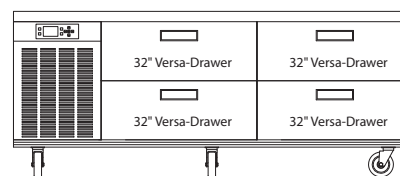

Elevation View
18682VDL, 18682VDL-CE

Specifications

Model	32" Drawers	12"x20" Pans	Volume ft ³ /L	H.P.	V/Hz/Ph	Amps	NEMA Plug	Ship Weight lbs/kg	Energy KWH/Day
18650VDL	2	4	9/255	1/3	115/60/1	6.0	5-15	520/236	1.50*/4.01**
18650VDR	2	4	9/255	1/3	115/60/1	6.0	5-15	520/236	1.50*/4.01**
18682VDL	4	8	18/510	(2) 1/3	115/60/1	12.0	5-15	720/327	3.0*/8.02**
18682VDR	4	8	18/510	(2) 1/3	115/60/1	12.0	5-15	720/327	3.0*/8.02**
18650VDL-CE	2	4	9/255	1/3	230/50/1	3.6	BS1363	520/236	1.50*/4.01**
18650VDR-CE	2	4	9/255	1/3	230/50/1	3.6	BS1363	520/236	1.50*/4.01**
18682VDL-CE	4	8	18/510	(2) 1/3	230/50/1	7.2	BS1363	720/327	3.0*/8.02**
18682VDR-CE	4	8	18/510	(2) 1/3	230/50/1	7.2	BS1363	720/327	3.0*/8.02**

*All drawers refrigerators

** All drawers freezers

Delfield reserves the right to make changes to the design or specifications without prior notice.