




**CONTRACTOR  
LIGHTING & SUPPLY**  
WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

## DIE CAST LED EXIT SIGNS



### DIMENSIONS

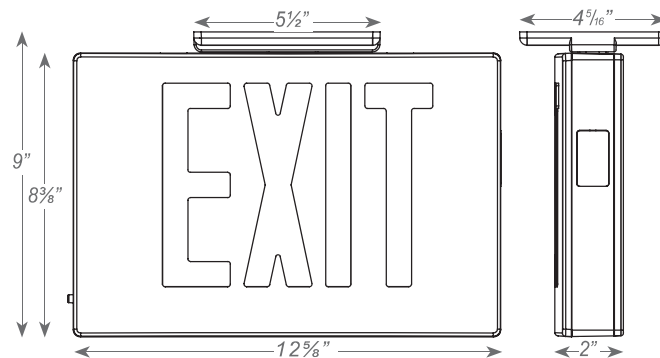

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V Long life maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL Listed for damp locations (0°C - 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

### HOUSING

- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.

### OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual test to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

### ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED.

### ORDERING INFORMATION

MODEL	LETTER COLOR	HOUSING COLOR	PANEL COLOR	BATTERY	NO. OF FACES	OPTIONS
02-XA	R Red G Green	W White B Black A Aluminum	W White B Black A Aluminum	Blank AC Only EM Battery Backup	1 Single Face 2 Double Face 3 Universal Single/ Double Face	SDT Self-Diagnostics <sup>1</sup> 2C Dual-Circuit <sup>2</sup> TP Tamper-Proof

<sup>1</sup> Available only with EM units.

<sup>2</sup> Available only with AC units.