

INCOGNEETO™ UNDER-COUNTER BUFFET WARMER



FEATURES

- Models available in 650 watts
- Under-the-counter design with a polycarbonate top and aluminum housing
- Magneeto™ trivet locates heat zone when placed on countertop – one included with purchase
- Accommodates up to a 12" (305 mm) induction-compatible enamel cast ironware or traditional chafer
- Can be safely used under natural stone or engineered "stone" Countertops
- Automatic pan detection allows for instant energy transmission to pan; almost no energy consumption when pan is not present
- Lock feature prevents unwanted setting changes
- Standard Cat 5e or Cat 6 patch cable from unit to control box included
- Available in 100–120 VAC or 200–240 VAC, single phase
- Includes plug and cord (6 ft. nominal)
- One-year field-service warranty – U.S. and Canada




PERFORMANCE

The CookTek® Incogneeto™ is an under-counter buffet warmer designed to mount under natural stone or "engineered" stone countertops – no cutting of the stone is required. The Magneeto™ trivet (one included with purchase) is placed on the countertop and acts as a temperature sensor, communicator, and locator device which allows the efficient heating of any induction-compatible pan through the stone countertop.*

ACCESSORIES (NOT INCLUDED)

- Additional Magneeto™ Trivet (Part # INC-3000)
- Large Round Chafer, 6.9 qt, Glass Lid with 1/1 SS Insert (Part # 301311)
- Large Round Stainless Insert, 1/1 (Part # CT-103128)
- Large Round Stainless Insert Split Pan, 2/2 (Part # CT-103771)
- Large Round Porcelain Insert, 1/1 (Part # CT-103095)
- Large Round Porcelain Insert Split Pan, 2/2 (Part # CT-103096)
- Medium Round Chafer, 4.8 qt, Glass Lid with 1/1 SS Insert (Part # 301309)
- Medium Round Stainless Insert, 1/1 (Part # CT-103129)
- Medium Round Porcelain Insert 1/1 (Part # CT-103094)
- Serving Spoon Holder, Large or Medium (Part # CT-103097)

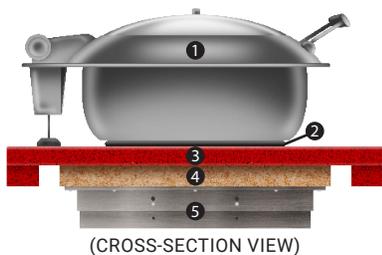

1. Chafing Dish
2. Magneeto™ 2 Trivet
3. Stone Countertop
4. Plywood Substrate
5. Incogneeto™ Unit



INC-3000



301311 (Large)
301309 (Medium)



CT-103128 (Large)
CT-103129 (Medium)



CT-103771 (Large)



CT-103095 (Large)
CT-103094 (Medium)



CT-103096 (Large)






CT-103097 (Large or Medium)



*Induction buffet units require the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

DOC-1614 / Revision E / February 2025

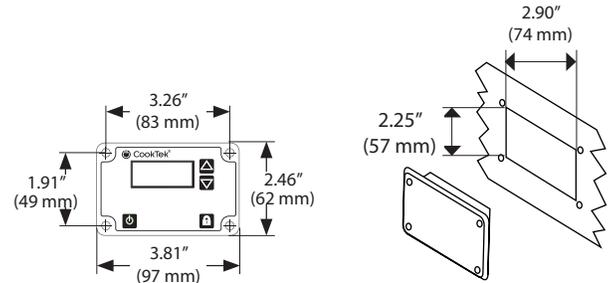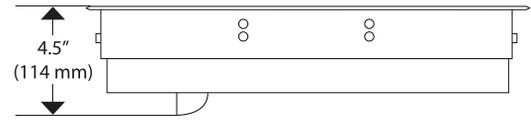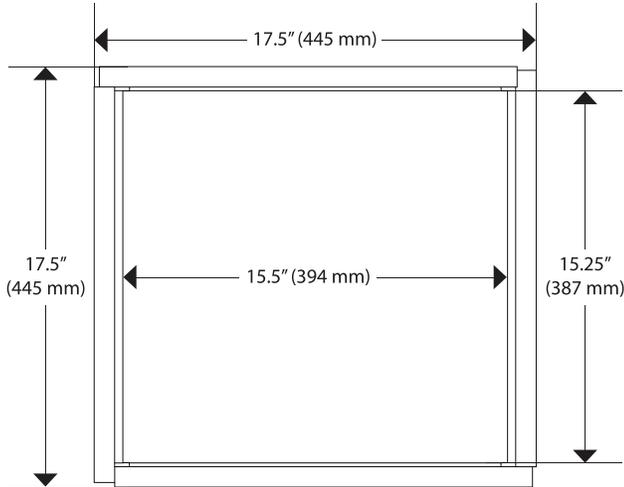

| DIMENSIONS | | |
|--|---------------------------------|---------------------|
| Unit Height | 4.5" | 114 mm |
| Unit Width | 17.5" | 445 mm |
| Unit Depth | 17.5" | 445 mm |
| Interior Surface Width | 15.5" | 394 mm |
| Interior Surface Depth | 15.25" | 387 mm |
| Weight | 15 lb. | 6.8 kg |
| Max Ambient Temperature | 122°F | 50°C |
| CLEARANCE | | |
| Front | 2" | 51 mm |
| Sides | 2" | 51 mm |
| Below* | 6" | 152 mm |
| COOLING REQUIREMENTS AND SPECIFICATIONS* | | |
| Min. Ventilation Requirements | 16 in ² | 103 cm ² |
| Internal Cooling Fan Displacement | 70 CFM (2.0m ³ /min) | |

| SHIPPING INFORMATION | | |
|----------------------|-----------------|--------|
| Packaged Height | 10" | 254 mm |
| Packaged Width | 21" | 533 mm |
| Packaged Depth | 21" | 533 mm |
| Packaged Weight | 18 lb. | 8 kg |
| Item Class | 250 NMFC #26710 | |

* See document CT-104648 for complete Incogneeto™ installation instructions.

| ELECTRICAL SPECIFICATIONS (SINGLE PHASE) | | | |
|--|--------|-------------------------------------|----------------------------------|
| MODEL B651-U2 | | | |
| UNITED STATES/ CANADA | 660801 | 100–120 V, 50/60 Hz, 6 A, 100–650 W | NEMA 5-15P |
| MODEL B652-U2 | | | |
| UNITED STATES/ CANADA | 660901 | 200–240 V, 50/60 Hz, 4 A, 100–650 W | NEMA 6-20P |
| UK/SAUDI ARABIA | 660902 | 200–240 V, 50/60 Hz, 4 A, 100–650 W | BS1363, 13A, 230V |
| INTERNATIONAL | 660903 | 200–240 V, 50/60 Hz, 4 A, 100–650 W | CEE 7/7 Schuko, 16A, 250V |
| AUSTRALIA | 660904 | 200–240 V, 50/60 Hz, 4 A, 100–650 W | AS/NZ 3112:2000, 10A, 250V |
| SOUTH AFRICA | 660907 | 200–240 V, 50/60 Hz, 4 A, 100–650 W | BS 546, 16A, 250V |
| ISRAEL | 660908 | 200–240 V, 50/60 Hz, 4 A, 100–650 W | SI 32, 16A, 250V |

Dedicated circuit required for each installation.



NEMA 5-15P



AS/NZS 3112:2000,
10A, 250V



NEMA 6-20P



BS 546, 16A, 250V



BS1363, 13A, 230V



CEE 7/7 Schuko,
16A, 250V



SI 32, 16A, 250V