



www.doyon.qc.ca • www.nu-vu.com

JA12SL

JET-AIR OVEN

The JA series from Doyon is known worldwide for its unique JET AIR SYSTEM. The air moves in one direction, stops then moves the other way resulting in a bidirectional and gentle velocity air flow for exceptional baking results. This system will help you bake faster and more evenly without having to turn pans during baking time. The Jet Air fan system will save energy and labor costs.

The JA12SL provides great flexibility in terms of range of products that can be baked or cooked. It features a programmable or manual one shot and constant pulse steam injection. To get the results you really want, we have added as standard a fan delay for those delicate products.



JA12SL

STANDARD FEATURES

OVEN

- Outstanding steam shot and pulse injection system
- Reversing fan system
- Two speeds fan
- Fan delay switch
- High production oven
- Manual mode and user friendly EBake programmable control up to 99 recipes
- Digital temperature control up to 500°F
- Digital reminder timer
- USB Port
- Brightly lit, compact space saving unit
- Full view heat reflective thermal glass doors
- Fully insulated, completely sealed
- Energy efficient (baking temperature reached in 15 minutes)
- Magnetic latches
- Door switch cutoff for fan blower
- Stainless steel inside and outside
- 3/4 HP motor
- 2 year parts 1 year labor limited warranty

OPTIONS

- Perforated nickel plated pizza decks
- High temperature gasket for baking over 400°F (250°C)
- Water softener: PLF240

Experience our top-of-the-line ovens today!



5600 13th Street • Menominee, MI 49858 USA

Phone: 906-863-4401 E-mail: sales@nu-vu.com
 Toll Free: 1-800-338-9886 www.doyon.qc.ca
 Fax: 906-863-5889 www.nu-vu.com

OVERALL DIMENSIONS

JA12SL 38 3/8" W X 37 5/8" D X 73" H
(975 mm X 956 mm X 1854 mm)

OVEN INTERIOR DIMENSIONS

JA12SL 26 3/4" W X 19 1/2" D X 26 1/4" H
(679 mm X 495 mm X 667 mm)

Shelf spacing 3 1/2" (95 mm)

ELECTRICAL SYSTEM

JA12SL

1 Phase:

208V - 103 A - 21.5 kW - 60 Hz - 2 wires + Ground
240V - 90 A - 21.5 kW - 60 Hz - 2 wires + Ground

3 Phases:

208V - 66 A - 21.5 kW - 60 Hz - 3 wires + Ground
240V - 52 A - 21.5 kW - 60 Hz - 3 wires + Ground

Other voltages available

WATER INLET: 1/4" NPT

Minimum clearance from combustible material

1" (25 mm) side and back

4" (102 mm) on non combustible floor

12" (305 mm) top

FINISH: Stainless steel

SHIPPING WEIGHT

JA12SL 1060 lb (481 kg) approximately

CAPACITY




Standard sheet pans 18" X 26" (457 mm X 660 mm): 12 pans

Four-strapped bread pans: 24 loaves

9" (230 mm) pies: 84 pies

Electrical service connection and water inlet are located at the back of the unit.
Specifications and design are subject to change without notice.

JA12SL

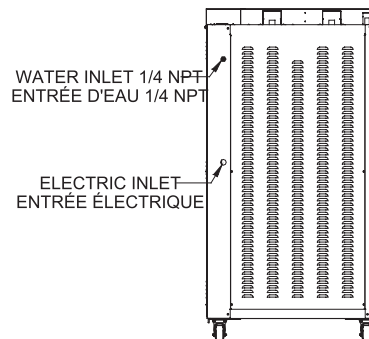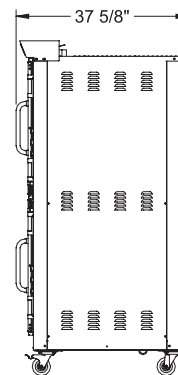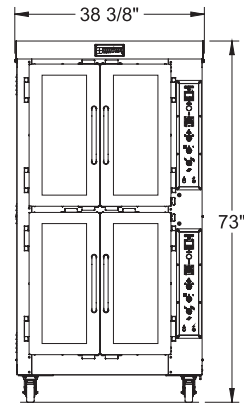

5600 13th Street • Menominee, MI 49858 USA
Phone: 906-863-4401 E-mail: sales@nu-vu.com
Toll Free: 1-800-338-9886 www.doyon.qc.ca
Fax: 906-863-5889 www.nu-vu.com