




DRIP TRAY


SURFACE MOUNT SERIES WITH CUTOUT 8 1/2" X 46"

- Designed specifically for Metropolis™ H draft towers.
- Add European style while creating dispense excitement.
- Condition the glass before pouring - invert glass, push down on sprayer for cold water rinsing.
- Robust 18 gauge stainless steel construction.

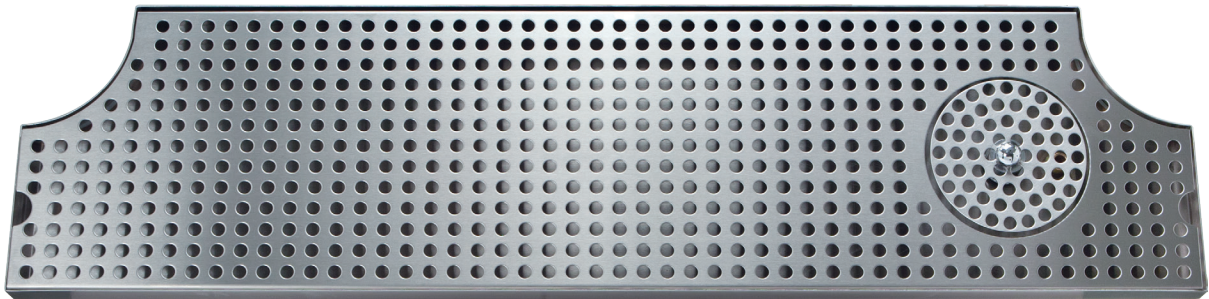

DP-MET-H-46GR-Z

Stainless Steel

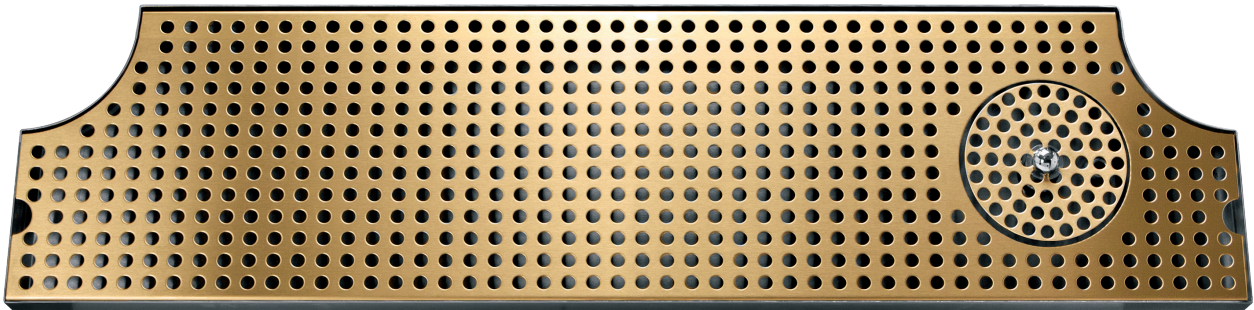

DP-MET-H-PVD-46GR-Z

PVD Brass / Stainless Steel



Part No.	Dimensions	Finish	Shipping Weight
❑ DP-MET-H-46GR-Z	8 1/2"W x 46"L x 3/4"H	Stainless Steel	TBD
			TBD
❑ DP-MET-H-PVD-46GR-Z	8 1/2"W x 46"L x 3/4"H	PVD Brass / Stainless Steel	TBD
			TBD

Rinser Water Inlet Installation

- Always check local plumbing codes first.
- Install in-line water regulator set at 15 PSI from the street water supply (no greater, perfect operating pressure).
- Install in-line one way check valve from the street water supply (prevents pressure drop which can cause leaking).
- Install in-line shut off for the rinser system from the street water supply (this must be turned off nightly).
- If teed into soda system make sure system can handle the increased water demand. Have plumber install a 45° 1/2" O.D. barb for the drains if line is not hard plumbed into the system.
- Install a shut off for the rinser water supply if line is not hard plumbed into the system.

Dimensions

