ш



Project:	AIA#
Item:	
Location:	SIS#
Approved:	

FOOD PREPARATION TABLES

DP119HC Deli/Pizza Four Door Prep Table **Hydrocarbon Series**

MODEL: **DP119HC**

7 Year Parts/Labor Warranty 7 Year Compressor Warranty



CABINET CONSTRUCTION

- Stainless steel front, sides, top, doors, and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Aluminum top interior liner prevents spill from falling into cabinet
- Stainless steel top
- Removable hoods and insulated lid assemblies are made of matching stainless steel
- Self-closing doors with 120° stay-open feature on cam-lift hinges
- Plug-in door gaskets
- Easy lift-off door removal for service and cleaning
- Field reversible doors
- 3" Casters, 2 with brakes standard
- 19" Wide reversible cutting board constructed of white polyethylene
- · Cutting board removable for cleaning
- Eight (8) epoxy-coated steel wire shelves
- Units will accept pans up to 6" deep (pans are not included)
- Compressor available on left or right, specify at time of unit order

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Clear lid
- Combination door/drawer models
- Overshelf kits
- Additional shelves
- · Shelf clips
- Pan support
- Door locks
- · Composite cutting board
- Thermometer
- Night cover
- Bun tray rack
- 6" Casters
- · 6" Legs black or seismic/flanged
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Adaptive defrost
- Epoxy coated evaporator coil
- Enhanced airflow maintains temperatures between 36° 38°F









MODEL	DP119HC	
EXTERNAL DIMENSIONAL DATA		
Width Overall	119"	
Depth Overall with Cutting Board	38 1⁄8"	
Height Overall with Casters & Lid Open	54 %"	
No. of Doors	4	
Depth with Door Open 90°	57 1⁄%"	
Door Openings	21 %" x 23 %"	
Depth, Cutting Board	19"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	42.2	
Internal Width Overall (in)	115"	
Internal Width Usable (in)	100"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	23 ¾"	
No. of Shelves	8	
ELECTRICAL DATA		
Full Load Amperes	7.8	
Voltage	115/60/1	
Nema Plug (8' cord)	5-15P	
REFRIGERATION DATA		
Horsepower	1/2	
Capacity (BTU/Hr)	4234	
Heat Rejection (BTU/Hr)	6351	
Charge (lbs/grams/ounces)	0.2646 / 120 / 4.2	
SHIPPING DATA		
Gross Weight - Crated	712 lbs	
Height - Crated	49"	
Width - Crated	122"	
Depth - Crated	37"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).



cUL us W / kcl R AQ W

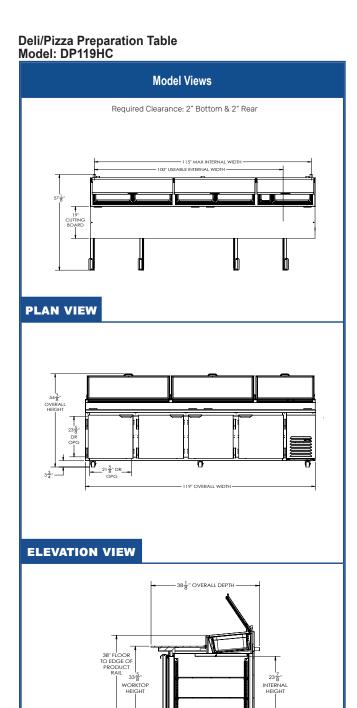

ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.



SIDE VIEW

