**Brewing Excellence** 

# ECO Brewers



Model 4543-D2 (decanters sold separately)

Model 4774-A (Airpot sold separately)



## APPLICATION

At Bloomfield, our innovation goes beyond brewing the perfect decanter of coffee. We build equipment that makes brewing simple, so you're able to serve your customers better. Our line of Eco-Brewers are designed for two key reasons: Economy price and Eco friendly because this brewer does not use a traditional water tank that is constantly being heated. Bloomfield utilizes a fresh water heat pump system that only consumes energy while it's brewing. This equipment is easy to operate, simply add fresh water.

## FEATURES

[Decanter Style]

- Stainless steel body
- ON/Off Switch
- Brewing indicator light
- Optimal brewing temperature
- Brewing time: 7 minutes/decanter
- Up to 100 8oz cups per hour
- 2 warming plates

#### [Airpot Style]

- Stainless steel body
- ON/Off Switch
- Brewing indicator light
- Optimal brewing temperature
- Brewing time: 7 minutes/airpot
- Up to 100 8oz cups per hour

### **OPTIONS/ACCESSORIES**

□ Filter paper- part# J-POF 1,000 per case, 500 per bag, 2 bags per case, wide base

PRODUCT WARRANTY Limited one year parts & labor

### CERTIFICATION



SUGGESTED AIRPOT


7755S-ALM - 2.2 LITER, 74oz lever pump, air pot with sight glass



Sheet No. ECO-08/14

NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.

# ECO Brewers

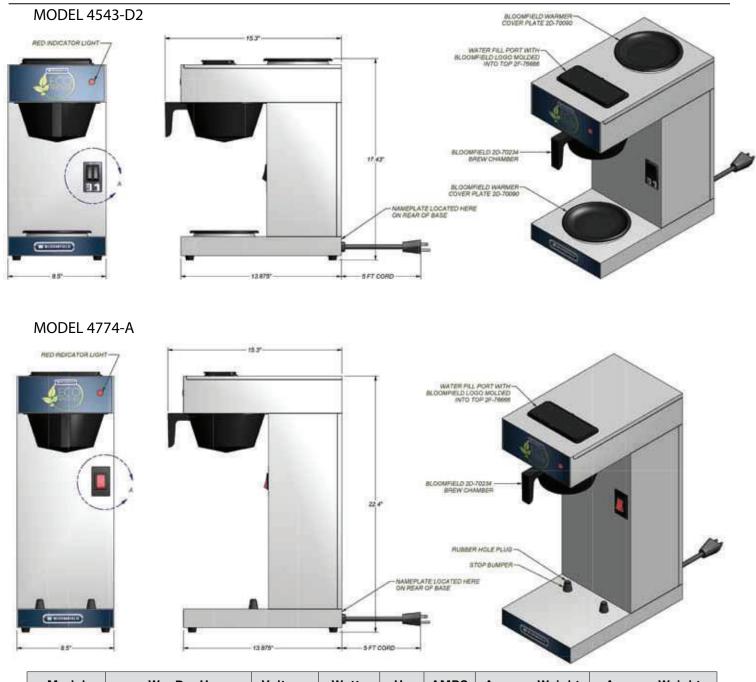

| Model<br>Number | W x D x H<br>Inches<br>(MM)            | Voltage | Watts | Hz | AMPS   | Approx. Weight<br>Installed<br>LBS<br>(KG) | Approx. Weight<br>Shipping<br>LBS<br>(KG) |
|-----------------|----------------------------------------|---------|-------|----|--------|--------------------------------------------|-------------------------------------------|
| 4543-D2         | 8.5 x 13.9 x 17.4<br>(349 x 464 x 419) | 120V    | 1650  | 60 | 13.75  | 13<br>(5.9)                                | 14.8<br>(6.7)                             |
| 4774-A          | 8.5 x 13.9 x 22.4<br>(349 x 464 x 559) | 120V    | 1450  | 60 | 12.083 | 17<br>(7.7)                                | 18.1<br>(8.2)                             |

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Wells exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

Wunder-Bar • 2060 Cessna Drive, Suite 100, Vacaville, CA 95688 U.S.A. Phone (707) 448-5151 • Fax (707) 448-1521 www.wunderbar.com • Printed in the U.S.A. NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.