
ELECTRIC HYDRAULIC DOCKLEVELER - EH-68-50

APPROX WEIGHT: 2344 lbs.

DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

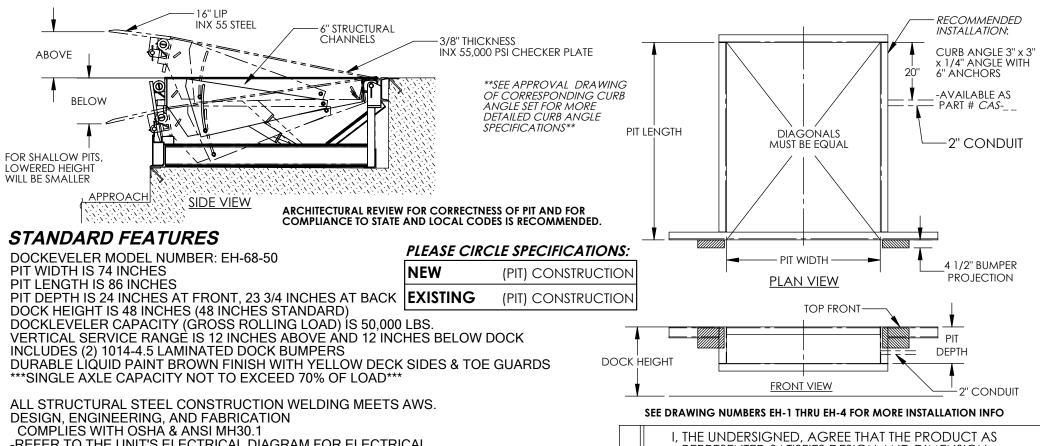

- -REFER TO THE UNIT'S ELECTRICAL DIAGRAM FOR ELECTRICAL SERVICE REQUIREMENTS.
- INSTALL TO MEET ALL APPLICABLE STATE & LOCAL CODES FOR YOUR AREA!
- -NOTE: REFER TO THE APPROPRIATE ELECTRICAL CIRCUIT DIAGRAM (FOUND IN THE OWNER'S MANUAL) FOR REQUIRED WIRING TO COMPLETE

INSTALLATION (SOME WIRING TO BE SUPPLIED BY OTHERS.)

SPECIAL FEATURES

NONE

460V 3 PHASE AC POWER

CONTACT FACTORY FOR OTHER POWER OPTIONS

REPRESENTED SATISFIES DESIGN AND DIMENSION Α REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO Ρ CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE Ρ AND LOCAL REGULATIONS AND STANDARDS R UNITS REQUIRING APPROVAL DRAWINGS OR 0 MODIFIED ARE NON-RETURNABLE V [] As drawn [] As marked Α Signed: Date: **Printed Name:** LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:			P.O.# X
7 20112 1717 (1 (017 (O101(11 (O			W.O.# X
DRAWN BY: TJM	DATE: 05/	'18/11	SALES: X
reference: X	,	SCALE: NTS	FILE NAME:
QUOTED LEAD TIME: X	QUOTE #		06-007-034

DIMENSION TOLERANCE ± 1/4"