


# EverBase Modular Flooring

## SPECIFICATION SHEET

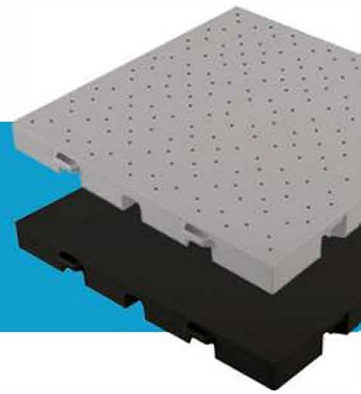

**EverBase™** is EverBlock's general purpose modular interlocking flooring system. It can be used for a variety of applications at all types of venues and facilities. **The EverBase** is a **12" x 12"** flooring tile that interconnects with adjacent tiles to create a seamless floor surface and a solid support base for all types of activities. From exhibit floors to game courts and from basement flooring to garage floors, the **EverBase** is a versatile floor for a multitude of event, business, institutional and home uses.

### MODULE SIZES

Item	Description	Length	Width
EBF1	EverBase	12" (30.48 cm)	12" (30.48 cm)
		Thickness	Weight
		1.1" (2.79 cm)	1.27 lb. per tile

### MATERIAL

Hi-Impact Polypropylene Co-Polymer ("no-break") with UV Inhibitors added for outdoor use.

### COLORS

\* Custom colors available with minimum order sizes. Premium colors gold and silver are \$0.25 extra.

RED (PMS 185)	GREEN (PMS 347)	LIGHT GREY (PMS 428)	DARK GREY (PMS 425)	LIGHT BLUE (PMS 804)	BLUE (PMS 286)	YELLOW (PMS 810)	BROWN (PMS 469)
ORANGE (PMS 804)	BLACK (PMS Black C)	WHITE (No PMS)	TRANSLUCENT/ MILKY WHITE (No Color)	PINK (PMS 13-1520)	PURPLE (PMS Violet)	GOLD (No PMS)	SILVER (No PMS)

### VERSIONS

#### Solid Top (ST)

Features a flat top surface




#### Drainage Top (DT)

Contains a series of drainage, light, and aeration holes



#### Connector Lug Tile

Contains lug connectors on top to integrate with EverBlock building blocks

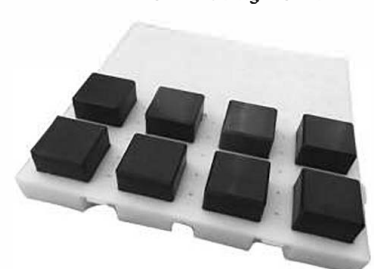

## FIRE RATING

**UL94HB** (Underwriters Laboratory Test):

\*This test signifies that **EverBlock** does not flare up when exposed to an open flame and has a slow burn rate of 2" per minute for a 2" wide, 0.5 millimeter thickness test sample. EverBlock meets all applicable standards for temporary floor covers.

Hot wire ignition rating: **3**

**ASTM 2859** (Flammability Of Finished Textile Floor Covering Materials): **PASS**

## SHIPPING QUANTITIES

Standard Pallet:	40" x 48" x 84	smaller quantities may be ordered	630 sq/ft
53ft Truckload Quantity:	26 Pallets		16,380 sq/ft
20ft Ocean Container:	10 Pallets		6,300 sq/ft
40ft Ocean Container:	20 Pallets		12,600 sq/ft
40ft High Cube Ocean Container:	20 Extra Tall Pallets		12,600 sq/ft
Military 463L Pallet (88" x 98" x 96"):	2,400 sq/ft maximum loading		

## WEIGHT LOADING CAPACITY: 8,500 lbs. sq/ft

\*On a solid subsurface, non-moving (static) weight, with equal distribution of load across the tile surface. **Support Structure:** Intersecting bi-directional support ribs provide structure, torsional strength, and additional weight distribution and weight loading capabilities.




## AVAILABLE ACCESSORIES

**Transition Edging:** Male Edge, Female Edge, Corner Piece

Transition Edging is recommended for pedestrian access points and areas where wheeled equipment or pedestrians are expected to come on to the floor.

**Transition Cart:**

Heavy duty wheeled cart that allows for easy transport and storage of flooring.

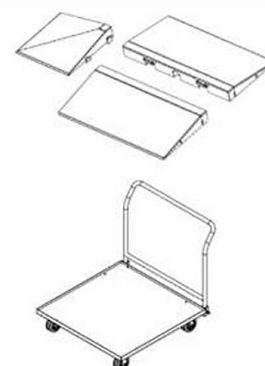

## USES OF EBF1:

**EverBase** may be used for numerous applications

- Exhibition Flooring
- Outdoor Decks
- Game Courts
- Garage Floors
- Tent Flooring
- General Event Flooring
- Base for EverBlock Building Blocks
- Raised Flooring and Risers

## EVERBASE FEATURES

**EverBase** incorporates unique functional features that distinguish it from competitors

- Unique modular design allows sections to be connected to create nearly any sized floor
- Proprietary connection system allows for quick installation and removal **WITHOUT** any tools
- Lightweight construction for easy handling and transport
- Durable cross ribs add structural support, increase weight loading capacity and provide torsional stability
- Integrated cable channels allow for networking and power cables to be run underneath the flooring
- May be installed on top of EverBlock modular building blocks, allowing floors to be raised
- UV protected
- Fully waterproof and chemical resistant and may be used indoors and outside
- 100% recyclable
- Drainage (DT) version allows water and light through to facilitate photosynthesis and create a moisture canopy that protects grass for several day

## WARRANTY



Standard 3 year warranty against manufacturer's defects.