

ECO13
Manual Slicer



SPECIFIER STATEMENT

Specified slicer will be an NSF rated heavy-duty manual ECO slicer with a 13" chrome plated carbon steel knife. Slicer offers top-mounted simultaneous sharpener, heavy-duty stainless steel knife cover and rear mounted, removable meat grip. Features 1/2 HP knife drive motor. Removable carriage and spring kickstand provide complete access for deep cleaning. Base is designed with limited crevices, allowing for easy cleanup.

Project _____
AIA # _____ SIS # _____
Item # _____ Quantity _____ C.S.I. Section 114000



MODEL

ECO13 Manual slicer with 13" knife diameter – 120/60/1

STANDARD FEATURES

- + 1/2 HP knife drive motor
- + 13" chrome plated carbon steel knife
- + Top-mounted ceramic simultaneous sharpener
- + Removable carriage system
- + Heavy-gauge stainless steel knife cover
- + No-volt release
- + Spring kickstand
- + Ergonomic style handle
- + Rear mounted, removable meat grip with contoured handle

DETAILS AND DIMENSIONS

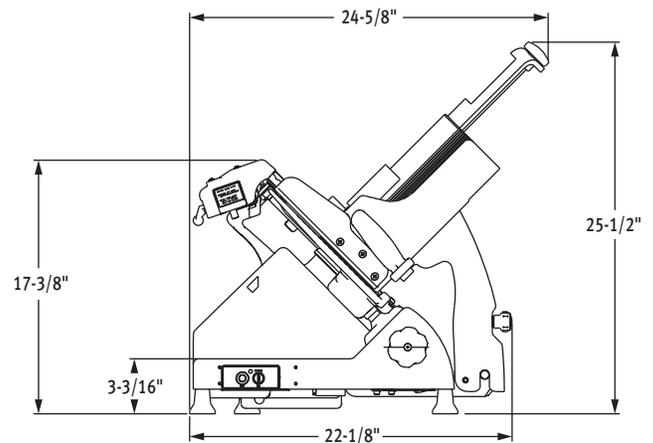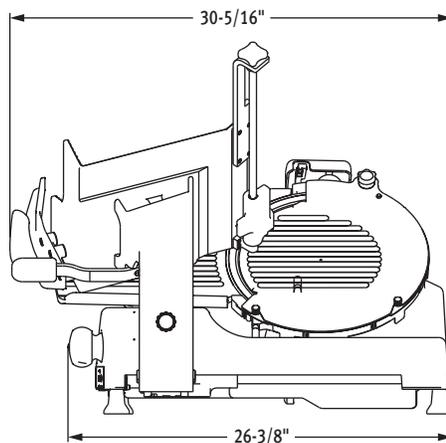

ECO13 MANUAL SLICER

Approved by _____ Date _____ Approved by _____ Date _____

SOLUTIONS / BENEFITS

1/2 HP Knife Drive Motor

13" Chrome Plated Carbon Steel Knife

Machined Grooves on Gauge Plate and Knife Cover

Improved Indexing System

- + Holds gauge plate position for precision slicing

Top-Mounted Ceramic Stone Sharpener

- + Single action; hones in 15 seconds

EASE OF USE 

Lift Assist

- + Helps user get underneath slicer to clean

Removable Meat Grip Assembly

- + Opens for unobstructed loading

Tilting and Removable Carriage

- + Makes it easy to keep slicer clean and sanitary

Magnetically Secured Knife Cover

- + No loose or moving parts make operation easier

SANITATION & CLEANING 

Sanitary One-Piece Base

- + Has fewer crevices where bacteria may grow
- + Made from burnished aluminum

Lift Assist

Top-Mounted Ceramic Stone Sharpener

- + Removable and warewasher safe

Removable Ring Guard Cover

- + Prevents debris build-up around the blade

Tilting and Removable Carriage

- + Makes it easy to keep slicer clean and sanitary

Top-Mounted Ceramic Stone Sharpener

- + Removes for easy cleaning

OPERATOR ASSURANCE 

Zero Knife Exposure

No-Volt Release

- + In the event of a power loss, slicer must be restarted before operation can continue

SPECIFICATIONS

Motor: 1/2 HP knife drive motor, knife is driven by a Poly V-Belt and runs at 430 RPM for optimal performance.

Electrical: 120/60/1; 5.6 amps.

Cord and Plug: 6 foot, three-wire power supply cord and plug. Plug not furnished on export models.

Construction: One-piece, sanitary burnished aluminum base. Product tray and gauge plate also burnished aluminum. Stainless steel top cover.

Capacity: The carriage will take food up to 5.75" x 10.75" rectangle or 7.5" in diameter.

Gauge Plate: Gauge plate is a heavy aluminum extrusion with machined grooves for smooth feeding. Adjustable to cut any thickness of slice up to 1".

Knife: The knife is approximately 13", constructed of 304L stainless steel and high performance Stellite alloy. Chrome-plated steel knife; 13" diameter, hollow-ground, hardened, polished, forged and chromium-plated carbon steel knife. Heavy duty knife cover provides easy cleaning access.

Warranty: All parts and service coverage for one year including knife.

Shipping Weight: 128 lb.

Plugs and Receptacles:

Machine Voltages	
Service Current Requirement if Plug Connected	120/60/1
	15 Amp.
Terminal Designation of Plug	2 Pole 3 Wire Grounding
NEMA Plug Configuration	5-15P
Plug Configuration	
Molded Plug on Cord	Yes
Plug - Straight/Angle	Straight
NEMA Receptacle or Connector Configuration	5-15R