# **BASE UNDERCOUNTER FREEZER (0°F)**

### Model: FA60N-U-D

Natural Refrigerant R-290 Model

# 60" Base Undercounter Freezer with Drawers

Heavy gauge #300 Series stainless steel top, stainless steel front and end panels, galvanized steel rear and grill and aluminum interior.



## **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel interior	Door locks
Stainless steel back	Front breathing
Drawer in lieu of door section above the condensing unit*	Compressor left (standard on right)

<sup>\*</sup>Drawer above condensing unit holds (1) 12 x 20 x 6 pan

Consult factory for other model configurations, options and accessories.





Project Name:	
Model Specified:	
Location:	
Ham Mar	Overstitus
Item No:	Quantity:
AIA #:	SIS #:

# **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Performance rated refrigeration system

Environmentally safe R-290 refrigerant

Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Expansion valve system

Easily serviceable, slide out condensing unit

#### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation

Smooth, polished chrome drawer/door handles

Spring loaded, self closing door (over condensing unit)

Magnetic snap in Santoprene™ drawer/door gaskets

Stainless steel roll out drawers

Completely enclosed, vented and removable rear and side grills

(8) 1 3/8" diameter plate casters mounted on heavy duty support plates (easily field installed)

#### **MODEL FEATURES**

Electronic control, automatic electric defrost

Refrigerated section with door above the condensing unit

Front breather air divider (field installed)

Field rehingeable door (over condensing unit)

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

<u>NOTE</u>: Models come standard with a door over the condensing unit. A drawer over the condensing unit is an option.

APPROVAL:

# **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cubic feet)	19 (538 cu I)
Width, Overall (inches)	60 <sup>3</sup> ⁄16 (1529 mm)
Depth, Overall (inches) (including handles & bumpers)	36 ½16 (922 mm)
Height, Overall (inches) (including 1 3/8" plate casters)	31 ¾ (806 mm)
Number of Drawers	4
Number of Half Doors	1
Interior Depth (inches) (above condenser)	30 (762 mm)
Interior Height (inches) (above condenser)	12 ½ (318 mm)
Interior Width (inches) (above condenser)	17 (1422 mm)
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/2
Capacity (BTU per hour)*	2180
ELECTRICAL DATA	

# (International)

Voltage (International)

Total Amps (International)

Defrost Amps (International)

10 ft. Cord/Plug [attached]

SHIPPING DATA	
Weight (pounds)	480 (218 kg)
Height - Crated (inches)	43 ¾ (1111 mm)
Width - Crated (inches)	62 (1575 mm)
Depth - Crated (inches)	47 (1194 mm)

115/60/1 (220/50/1)

7.0 (4.2)

9.1 (4.8)

Yes

(No)

#### **DRAWER PAN CONFIGURATIONS**

**Two Tier:** (2) 12 x 20 x 6 pans per drawer (supplied by others)

Two Narrow: (1) 12 x 20 x 6 pan per drawer (supplied by others)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)


Intertek


© Copyright 2021. Continental Refrigerator.

# Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579 Toll-Free: 800-523-7138 Phone: 215-244-9579 Toll-Free: 800-523-7138 Toll-Free: 800-523-7138 Toll-Free: 800-523-7138 Toll-Free: 800-523-7138 Toll-Free: 800-523-7138 Toll-Free: 80

A Division of National Refrigeration & Air Conditioning Products, Inc.

# **Model Plan Views**

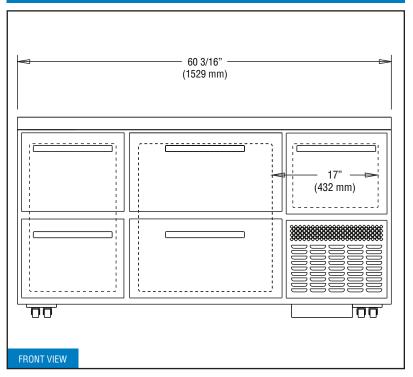

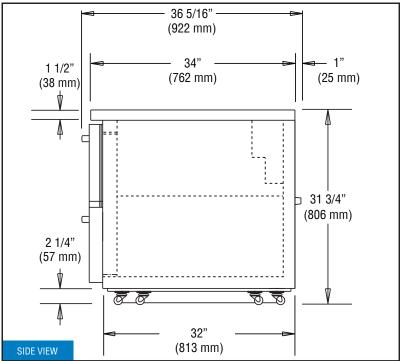

<sup>\*</sup> Rating @ -15°F evaporator, 90°F ambient