



TWO STATION WALL MOUNTED SINK WITH TUBULAR SUPPORTS

ELECTRONIC OPERATED



FEATURES:

8 1/2" high backsplash.

8" sink bowl depth.

Two stainless steel "Z" brackets supplied each unit.

One K-6 3 1/2" rear basket drain.

Two tubular stainless steel support brackets that allow full clearance underneath.

Electronic Operated: Includes two **K-175** Electronic Faucets.

Single holes provided.

CONSTRUCTION:

K-175

All TIG welded.

Welded areas blended to match adjacent surfaces and to a satin finish.

Die formed tubular wall brackets.









Hands-Free Electronic Faucet

MATERIAL:

All 16 gauge type "304" stainless steel.

1 5/8" tubular "304" stainless steel wall brackets.

Stainless steel gussets.

MECHANICAL:

Single faucet holes.

		# of	# of		Cu.
Model #	Length	Faucets	Wall Supports	Wt.	Ft.
FC-WM-40FF	40"	2	2	65 lbs	15



MULTI-STATION ACCESSORIES & REPLACEMENT PARTS

K-13



FLOOR STANDING LEGS MODIFICATION

Converts Wall Mounted FS-WM SERIES Sink To A Free Standing Floor Unit.

- Stainless Steel Legs with Flanged Feet
- Sides and Rear Cross Bracing

Model #	Fits Sink Length	QTY:
FS-CB-40	40"	



Ships UPS

Standard Faucets conform to NSF 61 Standard 9 and compliance to AB 1953 Standards.




Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.


For Orders & Customer Service:


Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes: Email: smartfab@advancetabco.com or Fax: 631-586-2933 TOL ± .500" ALL DIMENSIONS ARE TYPICAL

FC-WM-40EF

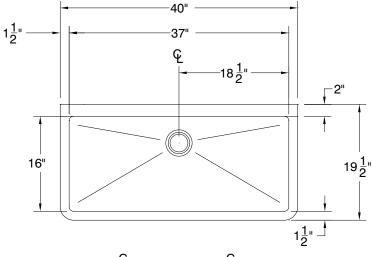





65 Lbs.

