



FLEX-FLASH™ ROOF FLASHINGS TECHNICAL SPECIFICATION

Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

SPECIFICATIONS

Oatey Flex-Flash Roof Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the plumbing vent pipe is required.

APPROVALS AND LISTINGS


IAPMO Listed
*excludes #14025



DESCRIPTION

All dimensions in inches.

- Roof Flashing slides over vent pipe for pitch to 45°.
- Flexible base conforms to most flat or contoured roof surfaces including clay tile.
- Non-fading sealing collar.
- Approved for Type B installations.
- Not for hot-mopped or built-up roofs.
- Do not use paint or petroleum based products on Flex-Flash product.

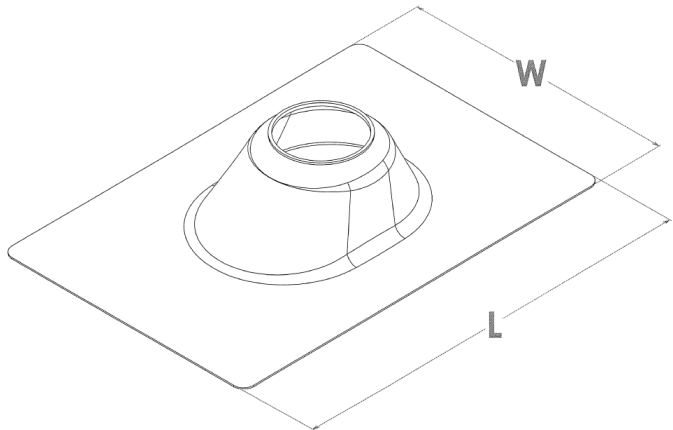

PRODUCT SELECTOR

FLEX-FLASH™ ROOF FLASHINGS						
✓	Product Number	Description	Length (L)	Width (W)	Pack	Carton Weight
	14009	1-¼" - 1-½" Flex-Flash Roof Flashing	11-¼	9	12	6 lbs.
	14012	2" Flex-Flash Roof Flashing	11-¼	9	12	6 lbs.
	14025*	2-½" Flex-Flash Roof Flashing	11-¼	9	12	7 lbs.
	14038	3" Flex-Flash Roof Flashing	13-¼	10	12	9 lbs.
	14041	4" Flex-Flex Roof Flashing	14	11-½	12	13 lbs.

Data is subject to manufacturing tolerances.

Access BIM/Revit content through www.oatey.com