



4700 W. 160th St.  
Cleveland, Ohio 44135  
Ph: (800) 321-9532  
Fax: (800) 321-9535  
www.oatey.com

## Floor Drain With P-Trap (Integral Drain)



### SUBMITTAL SPECIFICATION

**Engineering Specification:** The Oatey floor drain with P-Trap conforms with ASTM requirements. An optional backwater device transforms the drain into a backwater valve that allows drainage but prevents sewage backup.


Job Reference



PVC Floor Drain With P-Trap



ABS Floor Drain With P-Trap

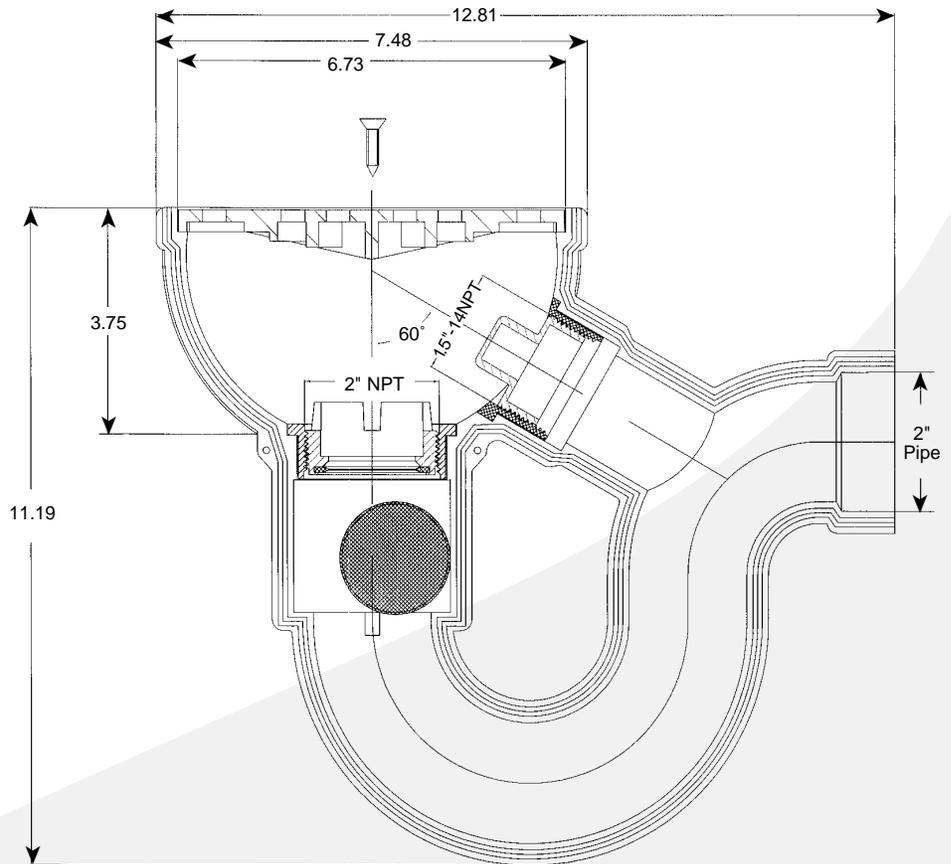

Shown with optional backwater valve device

(All dimensions in inches)

✓	Socket Size	Base Material	Grate Description and Finish	Part Number
	2 in.	PVC	White Polypropylene	42724
	2 in.	ABS	Black Polypropylene	42723

Backwater Accessories
42725 - 2" Backwater Valve Device

Grate Properties		
Finish	Open Area	Load*
Polypropylene	7.25 in. <sup>2</sup>	Light

\* Load is defined by ASME A112.21.1M.  
Light Duty – Safe live load under 2000 lbs.