



Project \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000



## FP350

### Continuous-Feed Food Processor



### SPECIFIER STATEMENT

Specified unit will be an NSF rated Hobart continuous-feed food processor with a large, easily removable feed hopper. Food processor has all aluminum hopper and housing and is compact for easy storage. Powerlink lever makes it easier for the user to process ingredients. Unit can process up to 26 pounds per minute with plate speeds at 430 RPMs and the exclusive decoring screw deflects product away from plate hub for complete processing. Cutting tools available include slicing, julienne, shredding, grating and dicing plates.

### MODELS

- ☐ **FP350** Continuous-Feed Full Hopper Food Processor

### STANDARD FEATURES

- + Red OFF, Green ON button
- + 1 HP motor with overload protection
- + Compact design
- + Front angled at 45°
- + Planetary drive
- + Large, removable full-size feed hopper
- + All-aluminum hopper and housing
- + Double interlock switch
- + Plate speed of 430 RPMs
- + Decoring screw
- + Hobart Ergo Loop pusher plate
- + Powerlink lever
- + No Volt Release

### ACCESSORIES (Available at extra cost)

- ☐ 3-Pack Plates:  $\frac{1}{16}$ ,  $\frac{5}{32}$  slicer plates,  $\frac{3}{16}$  shredder plate, 1 wall rack
- ☐ 6-Pack Plates:  $\frac{1}{16}$ ,  $\frac{5}{32}$ ,  $\frac{3}{8}$ ,  $\frac{7}{32}$ , slicer plates,  $\frac{5}{16}$  shredder plate, and  $\frac{3}{8}$  dicer plate, 2 wall racks
- ☐ 3-Peg Wall Rack: designed to hold three plates for additional plate storage
- ☐ Slicer Plates:  $\frac{1}{32}$ ,  $\frac{1}{16}$ ,  $\frac{1}{8}$ ,  $\frac{5}{32}$ ,  $\frac{7}{32}$ ,  $\frac{5}{16}$ ,  $\frac{3}{8}$ ,  $\frac{9}{16}$
- ☐ Crimping Plate:  $\frac{5}{32}$
- ☐ Soft Slicing Plates:  $\frac{5}{16}$ ,  $\frac{3}{8}$ ,  $\frac{1}{2}$ ,  $\frac{5}{8}$
- ☐ Julienne Plates:  $\frac{5}{64}$ ,  $\frac{5}{32}$ ,  $\frac{3}{8}$
- ☐ Dicer Grids:  $\frac{7}{32}$ ,  $\frac{9}{32}$ ,  $\frac{3}{8}$ ,  $\frac{1}{2}$ ,  $\frac{5}{8}$ ,  $\frac{3}{4}$ , 1
- ☐ Shredder Plates:  $\frac{1}{16}$ ,  $\frac{5}{64}$ ,  $\frac{1}{8}$ ,  $\frac{5}{32}$ ,  $\frac{7}{32}$ ,  $\frac{5}{16}$ ,  $\frac{3}{8}$
- ☐ Grater Plate: Fine, hard cheese
- ☐ Chicken Chopping Plate:  $\frac{3}{8}$
- ☐ Machine Table: Adjustable height to hold Food Processor
- ☐ Adjustable height stainless steel lug cart
- ☐ Stainless steel receiving pan
- ☐ Plastic receiving pan

FP350 CONTINUOUS-FEED FOOD PROCESSOR

Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_



## SOLUTIONS / BENEFITS

### PERFORMANCE

#### 1 HP Motor with Overload Protection

#### Large, Full-Size Feed Hopper

- + Supports processing capabilities for large variety of products and eliminates pre-cutting
- + Design permits continuous cutting of long products

#### Plate Speed of 430 RPMs

- + Precise cutting and dicing action without bruising or mashing product

#### Compact Design

- + Plates remove in seconds
- + Occupies minimal counterspace

#### Decoring Screw

- + Deflects products away from the plate hub for complete processing

### EASE OF USE

#### Front Angled at 45°

- + 45 degree angle for ease of product loading
- + Helps to reduce operator fatigue

#### All-Aluminum Hopper and Housing

- + Anodized finish resists harsh cleaners
- + Easy clean up

#### Compact Design

- + Occupies minimal counterspace
- + Production capacity for 26 pounds per minute

#### Powerlink

- + Less downward pressure needed to process dense products

#### Ergo Loop

- + Operator can use either hand to push feeder and load product

### SANITATION & CLEANING

#### All-Aluminum Hopper and Housing

- + Anodized finish resists harsh cleaners
- + Easy clean up

#### Large, Removable Full-Size Feed Hopper

- + Flexibility, convenience, reduced labor
- + Supports processing capabilities for large variety of products and eliminates pre-cutting
- + Design permits continuous cutting of long products

### OPERATOR ASSURANCE

#### Double Interlock Switch

- + Prevents machine from running when pusher plate swings away or is open

#### No Volt Release

- + Unit will not automatically turn on if power is lost

## SPECIFICATIONS

**Electrical:** 120/60/1, 3 conductor power cord (18 AWG) is 6 feet in length.

**Motor:** 10 amps. Planetary gear driven operating at 430 RPM output. 1 HP with overload protection.

**Switches:** Easy to operate (red) OFF and (green) ON switch. Pusher plate and feed hopper interlocks.

**Standard Equipment:** Basic unit with deflector plate, decoring screw and cleaning brush.

**Warranty:** Unit has full one-year warranty on parts, labor and mileage against manufacturer's defects. Service contracts are available.

**Cutting Tools:** Slicer, julienne and shredder plates feature stainless steel plates with cutlery-grade stainless steel knives. Grate plates feature stainless steel cutting plates with thermoplastic support hubs. Dicing grids have molded ring construction to support stainless steel knives. Plate combinations for dicing operations are shown in the table on page 3.




**Weight:** Shipping - 77 lb.; Net - 71 lb.



# FP350

## Continuous-Feed Food Processor

### DETAILS AND DIMENSIONS

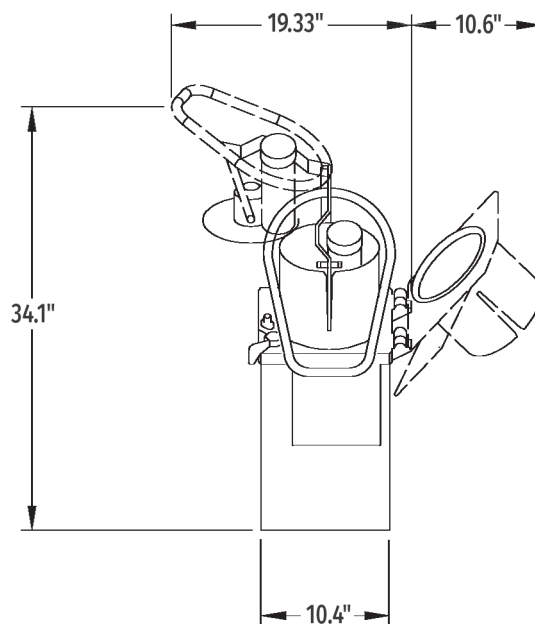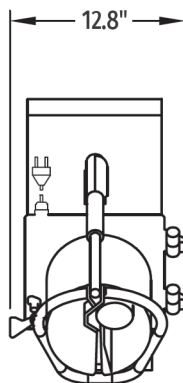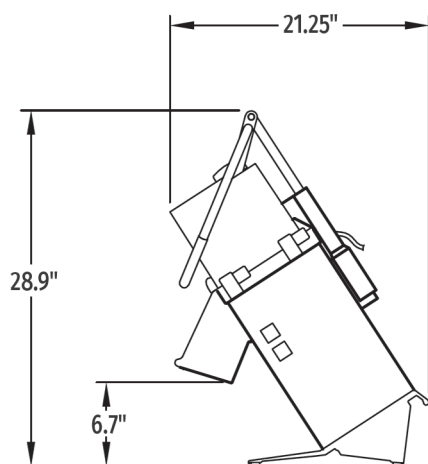

**WARNING:** Electrical and grounding connections must comply with the applicable portions of the National Electrical Code and/or other local electrical codes.

### LEGEND

| Electrical Connection |                                     |
|-----------------------|-------------------------------------|
| E1                    | Approximately 12" above counter top |

### Plugs and Receptacles:

| Machine Voltages                              |                                                                                       |
|-----------------------------------------------|---------------------------------------------------------------------------------------|
| Service Current Requirement if Plug Connected | 110-120/60/1                                                                          |
|                                               | 15, 20 Amp.                                                                           |
| Terminal Designation of Plug                  | 2 Pole<br>3 Wire<br>Grounding                                                         |
| NEMA Plug Configuration                       | 5-15P                                                                                 |
| Plug Configuration                            |  |
| Molded Plug on Cord                           | Yes                                                                                   |
| Plug - Straight/Angle                         | Straight                                                                              |
| NEMA Receptacle or Connector Configuration    | 5-15R                                                                                 |

| FP350 Food Processor |              |              |             |             |                |             |                |             |                |           |              |
|----------------------|--------------|--------------|-------------|-------------|----------------|-------------|----------------|-------------|----------------|-----------|--------------|
|                      | S35DICE-7/32 | S35DICE-9/32 | S35DICE-3/8 | S35DICE-1/2 | S35DICE-1/2LOW | S35DICE-5/8 | S35DICE-5/8LOW | S35DICE-3/4 | S25DICE-3/4LOW | S35DICE-1 | S35DICE-1LOW |
| 3SLICE-1/32-SS       |              |              |             |             |                |             |                |             |                |           |              |
| 3SLICE-1/16-SS       |              |              |             |             |                |             |                |             |                |           |              |
| 3SLICE-1/8-SS        | ✓            | ✓            | ✓           | ✓           |                | ✓           |                | ✓           |                | ✓         |              |
| 3SLICE-5/32-SS       | ✓            | ✓            | ✓           | ✓           |                | ✓           |                | ✓           |                | ✓         |              |
| 3SLICE-7/32-SS       | ✓            | ✓            | ✓           | ✓           |                | ✓           |                | ✓           |                | ✓         |              |
| 3SLICE-5/16-SS       |              | ✓            | ✓           | ✓           |                | ✓           |                | ✓           |                | ✓         |              |
| 3SLICE-3/8-SS        |              |              | ✓           | ✓           |                | ✓           |                | ✓           |                | ✓         | ✓            |
| 3SLICE-9/16-AL       |              |              |             |             |                |             | ✓              |             | ✓              |           | ✓            |
| 35SFSLC-5/16         |              | ✓            | ✓           | ✓           |                | ✓           |                | ✓           |                | ✓         |              |
| 35SFSLC-3/8          |              |              | ✓           | ✓           |                | ✓           |                | ✓           |                | ✓         |              |
| 35SFSLC-1/2          |              |              |             |             | ✓              |             | ✓              |             |                |           |              |
| 35SFSLC-5/8          |              |              |             |             |                | ✓           |                |             |                |           |              |

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.

 CAD and/or Revit Files Available