

FQG60T FilterQuick® 60 Series I Oil-Conserving Gas Fryers

Project _____
Item _____
Quantity _____
CSI Section 11400 _____
Approval _____
Date _____

Models

☐ 1FQG60T

☐ 2FQG60T

☐ 3FQG60T


Model Shown:
3FQG60T

- FilterQuick® fully-automatic filtration
- FQ4000 easyTouch® controller
- 63-lb oil capacity
- Optional Oil Quality Sensor (OQS)

Standard Features

- 18" x 14" x 3-3/4" (45.7 x 35.6 x 9.5 cm) frying area per frypot uses 60 lbs. (30 liters) of oil and cooks 3 twin baskets of food at the same time
- 119,000 Btu/hr (29,975 kcal/hr.) (34.9 kw/hr.) input per frypot meets high production demands of a varied menu
- FQ4000 easyTouch® controller makes cooking and filtering simple and intuitive. Fry station management features monitor and help control food and oil quality, oil life and equipment performance.
- Thermo-Tube heat-transfer system efficiently transfers energy into the oil, saving energy and extending oil life
- Robust, RTD 1° compensating temperature probe
- Stainless steel frypot, door and cabinet sides
- Sturdy stainless steel basket hangers
- Fingertip, closed cabinet, automatic filtration with rear oil flush puts filtration where it's most convenient to operate, right on the front of the fryer.
- Innovative safety features offer proprietary advantages over other fryers -- prevent simultaneous vat filtrations.

Options & Accessories

- Optional Oil Quality Sensor (OQS) monitors the health of the oil and indicates with great precision the true point that oil needs to be discarded.*
- Optional Auto Top-Off (ATO) feature maximizes oil life because the frypot maintains a favorable ratio of fresh to used oil.*
- Optional KitchenConnect® communication capability.*

*Must check with factory for optional add-on features.

Specifications

Designed to handle high production demands of a varied menu while conserving space, energy and oil.

FilterQuick® 60 Series I gas fryer is the ultimate, high-production, oil-conserving fryer family within the FilterQuick® platform, offering large 63-lb (31 liter) capacity with an 18" x 14" x 3-3/4" (45.7 x 35.6 x 9.5cm) cooking area. The ability to cook three baskets of food in an 18" x 14" x 3-3/4" cooking area, while allowing for reductions in the footprint space, oil use and energy use over the industry standard 50-lb fryers.

A two battery FQG60T can do the work of three standard fryers. The savings add up quickly using 12-20% less oil, upwards of 50% less energy, and 11-15% less space.

The FQ4000 easyTouch® touchscreen controller puts basic recipe and menu creation at your fingertips. Additional recipe features are available via our menu creation tool to add product images and translated product names to recipes. The optional KitchenConnect® Cloud-based service can enhance the speed and frequency of updating new menus for "Limited Time Offers" that can be adopted immediately for execution in the kitchen. The controller

has intuitive functions requiring minimal training to operate.

The easy-to-use, closed cabinet fully-automatic filtration (AF) system encourages more frequent filtering, which preserves oil life and ensures consistent, great-tasting food. The AF is operated with fingertip ease from the front of the fryer and no doors to open.

Frymaster's Thermo-Tube heat transfer system with 6" vs. 4" diameter tubes provides superior heat-to-oil transfer that saves energy and extends oil life. The tubes have high-heat, stainless steel alloy flow baffles that efficiently transfer the fryer's energy input to the surrounding oil. The durable baffles and reliable, built-to-last, high-efficiency burners keep maintenance to a minimum.

Crumbs and sediment from the frying area are trapped in the wide cold zone where they do not carbonize and contaminate the oil or cling to fried foods. The bottom of the frypots are sloped toward the front and are equipped with a large drain line so crew members can quickly flush out sediment and remove old oil.




FQG60T fryers meet ENERGY STAR® guidelines and are part of the Welbilt EnerLogic® program.

GAS CONNECTION REQUIREMENTS

| MODEL | GAS CONNECTION SIZE |
|---------|---------------------|
| 1FQG60T | 3/4" |
| 2FQG60T | One 1" |
| 3FQG60T | One 1" |

NOTE: For Germany 3/4" NPT Per Frypot

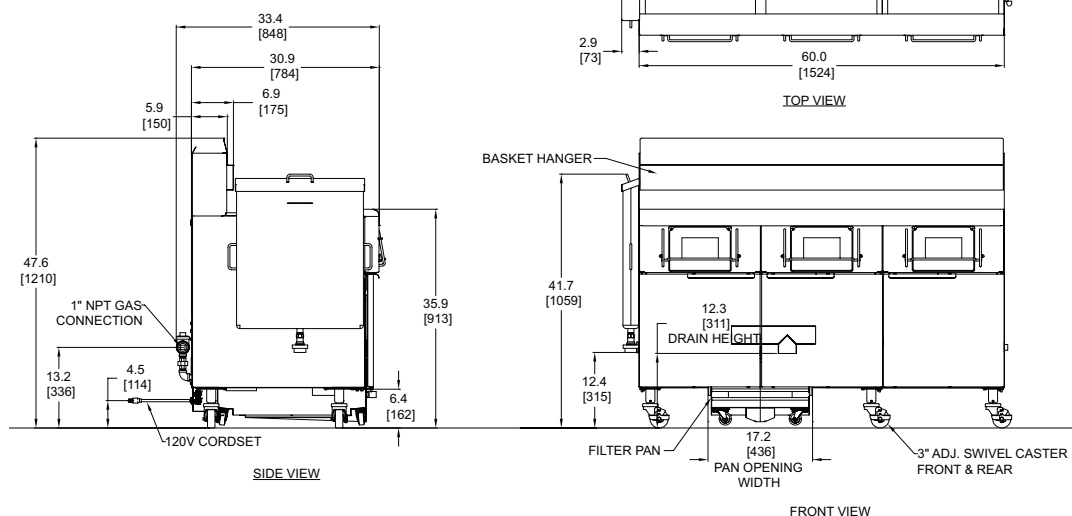

DIMENSIONS

| MODEL NO. | OIL CAPACITY | OVERALL SIZE (CM) | | | DRAIN HEIGHT (CM) | SHIPPING INFORMATION | | | | | |
|-----------|------------------------------------|-------------------|-------------------|--------------------|-------------------|--|-------|---------|--------------------|---------------------|---------------------|
| | | WIDTH (B) | DEPTH (C) | HEIGHT (A)* | | WEIGHT | CLASS | CU. FT. | DIMENSIONS (CM) | | |
| 1FQG60T | 63 lbs. (31 liters) | 20" (50.8) | 33-1/8" (84.1) | 47-3/4" (121.3) | 17-1/2" (44.5) | w/o filter 255 lbs. (116 kg) w/filter 390 lbs. (177 kg) | 85 | 39.6 | W 29" (73.7) | D 42" (106.7) | H 55" (139.7) |
| 2FQG60T | 63 lbs. (31 liters) each frypot | 40" (101.6) | 33-1/8" (84.1) | 47-3/4" (121.3) | 11-1/2" (29.2) | w/filter 645 lbs. (293 kg) | 77.5 | 70.2 | 52-1/2" (133.4) | 42" (106.7) | 55" (139.7) |
| 3FQG60T | 63 lbs. (31 liters) each frypot | 60" (152.4) | 33-1/8" (84.1) | 47-3/4" (121.3) | 11-1/2" (29.2) | w/filter 900 lbs. (408 kg) | 77.5 | 87.5 | 65-1/2" (166.4) | 42" (106.7) | 55" (139.7) |

POWER REQUIREMENTS

| MODEL NO. | CONTROLS/ FRYPOT | FILTER |
|-----------|----------------------|----------------------|
| FQG60T | 120V 1 A 220V 1 A | 120V 8 A 220V 5 A |

HOW TO SPECIFY

The following description will assist with ordering the features desired for this equipment:

1FQG60T One 63-lb. (31 liter) oil capacity gas tube fryer with 18" x 14" x 3-3/4" (45.7 x 35.6 x 9.5 cm) cooking area and easyTouch® lane controller.

2FQG60T/
3FQG60T Two or three 63-lb. (31 liter) oil capacity per frypot gas tube fryer(s) with 18" x 14" x 3-3/4" (45.7 x 35.6 x 9.5 cm) cooking area(s) and easyTouch® lane controller(s) with built-in filtration.

NOTES

1-1/2" (3.8 cm) kitchen main manifold gas supply line required. Gas inlet size (I.D.) should be no smaller than that provided for connection to the fryers. See service manual and/or plumbing codes for proper pipe sizing. Recommended minimum store manifold pressure to be 6" W.C. for natural gas and 11" W.C. for L.P. gas. Check plumbing codes for proper supply line sizing to attain burner manifold pressure of 3.0" W.C. natural or 8.25" W.C. L.P.

POWER CORDS: On 1 to 2 battery units, 1 power cord supplied
On 3 to 4 battery units, 2 power cords supplied

Please specify: Natural or LP gas; altitude if between 2,000 - 6,000 feet (610 - 1,829 Meters).

NOTE: DO NOT CURB MOUNT

CLEARANCE INFORMATION

A minimum of 24" (61.0 cm) should be provided at the front of the unit for servicing and proper operation, and 6" (15.2 cm) between the sides and rear of the fryer to any combustible material.

Welbilt reserves the right to make changes to the design or specifications without prior notice.

8700 Line Avenue
Shreveport, LA 71106-6800
USA

Tel: 318-865-1711
Tel: 1-800-221-4583
E-mail: info@frymaster.com

www.frymaster.com
7169C_FQG60T
Revised : 09/20