

# TWO STATION WALL MOUNTED SINK WITH TUBULAR SUPPORTS

## **ELECTRONIC OPERATED**





**Hands-Free Electronic Faucet** 

Item #:	Qty #:
Model #:	
Project #:	





#### **FEATURES:**

8 1/2" high backsplash.

8" sink bowl depth.

Two stainless steel "Z" brackets supplied each unit.

One K-6 3 1/2" rear basket drain.

Two tubular stainless steel support brackets that allow full clearance underneath.

Electronic Operated: Includes two K-175 Electronic Faucets.

Single holes provided.

#### **CONSTRUCTION:**

All TIG welded.

Welded areas blended to match adjacent surfaces and to a satin finish.

Die formed tubular wall brackets.

#### **MATERIAL:**

All 14 gauge type "304" stainless steel.

1 5/8" tubular "304" stainless steel wall brackets.

Stainless steel gussets.

#### **MECHANICAL:**

Single faucet holes.

		# OT	# OT		Cu.
Model #	Length	Faucets	Wall Supports	Wt.	Ft.
FS-WM-40EF	40"	2	2	77 lbs.	15





= Ships UPS

Standard Faucets conform to NSF 61 Standard 9 and compliance to AB 1953 Standards.

WARNING: Equipment that include faucets on this page may contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.




#### Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.


For Orders & Customer Service:


Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes: Email: smartfab@advancetabco.com or Fax: 631-586-2933 TOL ± .500" ALL DIMENSIONS ARE TYPICAL

### FS-WM-40EF

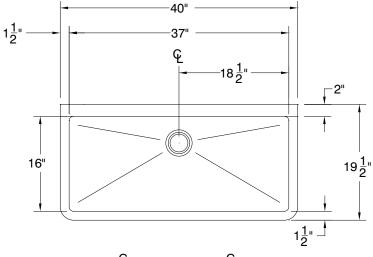





77 Lbs.

