

THREE STATION A.D.A. WALL MOUNTED SINK WITH TUBULAR SUPPORTS

ELECTRONIC OPERATED







Item #:	Qty #:
Model #:	
Project #:	



FEATURES:

8 1/2" high backsplash.

5" sink bowl depth.

Two stainless steel "Z" brackets supplied each unit.

One K-6 3 1/2" rear basket drain.

Two tubular stainless steel support brackets that allow full clearance underneath.

Electronic Operated: Includes three K-175 Electronic Faucets.

Single holes provided.

CONSTRUCTION:

All TIG welded.

Welded areas blended to match adjacent surfaces and to a satin finish.

Die formed tubular wall brackets.

MATERIAL:

All 14 gauge type "304" stainless steel.

1 5/8" tubular "304" stainless steel wall brackets.

Stainless steel gussets.

MECHANICAL:

Single faucet holes.

		# OT	# OT		Cu.
Model #	Length	Faucets	Wall Supports	Wt.	Ft.
FS-WM-60EFADA	60"	3	2	100 Lbs.	22







Standard Faucets conform to NSF 61 Standard 9 and compliance to AB 1953 Standards.

MARNING: Equipment that include faucets on this page may contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

For Orders & Customer Service:


Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes: Email: smartfab@advancetabco.com or Fax: 631-586-2933


DETAILS and SPECIFICATIONS


TOL ± .500" ALL DIMENSIONS ARE TYPICAL

FS-WM-60EFADA

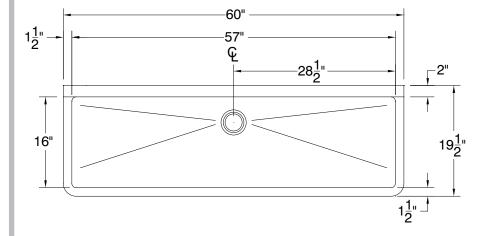



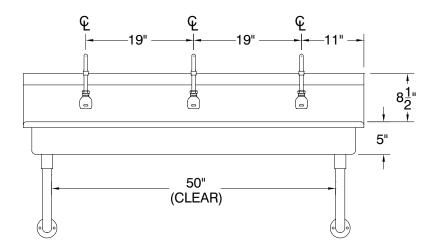



100 Lbs.

