

# Oasis

Refrigerated Self-Service Dual Sided Case Self-Contained

**Structural Concepts®**

DELIVERING FRESH. ALWAYS.™

- **FSC460R** 47"L x 50-3/8"D x 60-5/8"H
- **FSC660R** 75-3/8"L x 50-3/8"D x 60-5/8"H

## Included

- Breeze self-contained refrigeration
- 6' Power cord
- Casters w/ levelers
- E-Coated evaporator coil
- LED 3500K top light(s)
- NOTE: Electrical specs reflect highest Amp draw using lighted shelves option
- One year parts & labor; 5 year compressor warranty
- Price tag molding (matches interior color)
- Removable deck pans provide complete access to evaporator coil & refrigeration connections




Specify	Standard Features	Additional Options
<b>EXTERIOR COLOR</b>	• Laminate (stock colors)	• Laminate (non-stock colors) • Stainless steel
<b>INTERIOR COLOR</b>	• Powder coated Silversan Black	• Stainless steel
<b>LOWER FRONT PANEL COLOR</b>	• Powder coated Silversan Black	• Stainless steel (must choose stainless exterior)
<b>END PANELS</b>	• Full w/stainless steel mirror interior	• Cutaway w/glass
<b>VINYL GRAPHICS</b>	• None	• Full wrap graphic set
<b>SHELVING</b>	• Non-adjustable metal shelves, non-lighted	• Non-adjustable metal shelves, lighted (LED 3500K)
<b>ELECTRICAL CONNECTION</b>	• 6' Straight blade power cord (self-cont.)	• 6' Locking power cord (self-cont.)
<b>REFRIGERATION</b>	• Breeze self-contained refrigeration	
<b>MISCELLANEOUS</b>		• (2) Roll-down security cover, locking (inc. ht. to 69-1/2") • Second year parts & labor warranty
<b>ACCESSORIES</b>		• (2) Night curtain, retractable, non-locking (inc. ht. to 69-1/2") • (2) Removable solid security cover, locking


**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products	40

PLAN VIEW

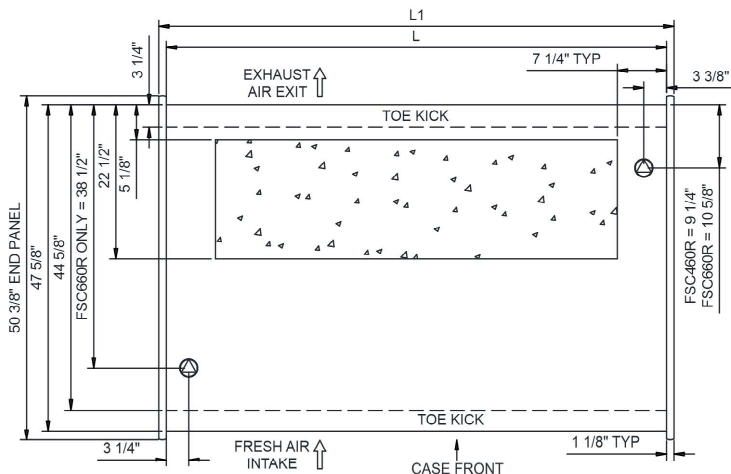

SIDE VIEW

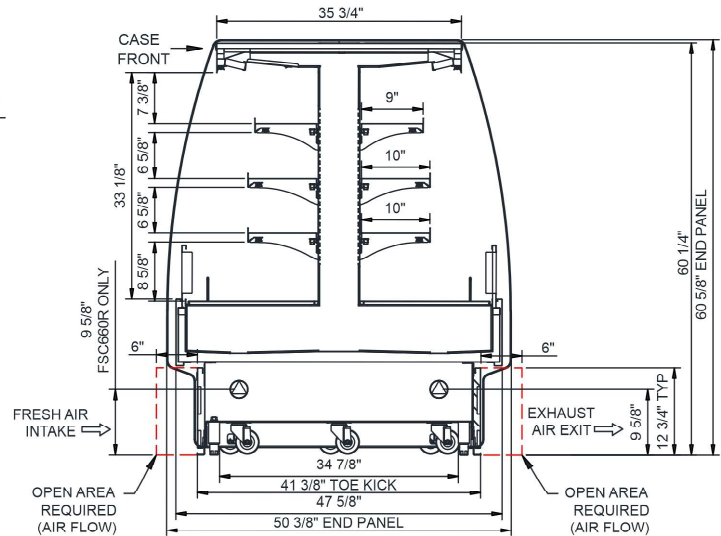

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX  
(SUPPLIED WITH 6" LEADS OR POWER CORD).  
 LOCATION OF DRAIN TUBE FOR REMOTE REF.  
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

REFRIGERATION LINE CONNECTION.  
 REMOTE FLOOR SINK & UTILITIES  
ACCESS AREA.

SELF-CONTAINED CASE SERVICE ACCESS AREA.  
 DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTU/H	Para. Rack BTU/H	Est Wt
FSC460R	44.75	47.00	.00	Self-Contained (R290)	Circuit #1	208-240	1	50-60	15.19	2,868	2+G	6-20P or L6-20P	N/A	N/A	N/A	1,300
FSC660R	73.13	75.38	.00	Self-Contained (R290)	Circuit #1	208-240	1	50-60	24.00	4,867	2+G	6-30P or L6-30P	N/A	N/A	N/A	1,900

\*\*\* Does not include electric defrost on freezer models.

## Regulatory Approvals:

All Models  
Accordance with AHRI Std 1200  
ETL Listed to UL 60335-2-89  
ETL Sanitation to NSF/ANSI 7



In Accordance with  
AHRI Std 1200

DOE 2017  
Energy Efficiency  
Compliant

## Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Electrical specs reflect highest Amp draw using lighted shelves option.
- 3) Compressor air intake in one side & out other side. All louvered panels cannot be blocked.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).