

Standard Floor Trough

General Information

| Project Name: | |
|---------------|--|
| Consultant: | |
| Item #: | |
| Model #: | |
| Quantity: | |







Specifications

FT Model Floor Trough is constructed of 14GA Type 304 stainless steel, with large integral coves and pitched 14" per foot to a 6½" OD waste outlet with 4" OD tailpiece. Perforated waste basket provided at each drain. Anchor straps welded to the sides secure trough to the floor.

Recessed flange and 1" deep ledge for IMC grating are integral with the unit. Trough is 4" deep overall.

Joints are TIG welded and leakproof. Exposed surfaces finished brush satin.



Product Guide

Use for Institutional and Public Buildings or large food prep facilities.

Integral coves, deep pitch and a large waste cup, assure quick and complete drainage.

Recessed flange supports floor tile and provides a grout pocket.

Setting frame for waterproof membrane and/or integral seepage flange with "weep" holes can be added for wet floor areas.

Extension arms and intersections available for multiple equipment layout.




(B) Options

- □ **DOD** 3", 3½", 5", 6", 8" OD Tube (circle one)
- □ WTO Waste Tube over 3" Long
- □ **AW** Additional Wastes
- □ **WCP** Waste Cup Strainer
- □ **BH** Beehive Strainers (Each)
- □ **OCW** Off Center Waste (Each)
- □ **ST12** Scrap Tray Up to 18" Wide
- □ **PWT** Perforated Waste Pipe
- □ SF-2 Special Size Setting Flange 2" Deep
- □ **SF-4** Special Size Setting Flange 2" to 4" Deep
- □ **OWT** Oversize Waste Tube
- □ **LS** Lint Screen for Laundry Trough
- □ ST20 Scrap Tray 20" Long
- **DSE** Drain on the Side or End
- □ **ROD** Rim on Drain
- □ **BSPC** Basket Strainer w/ Handle & Chain
- □ **BXD** Box Type Drain
- □ **BSX** Beehive Strainer for Box Drain
- ☐ **GA-12** 12GA Upgrade

^{*}See Price List for more options



DRAWINGS

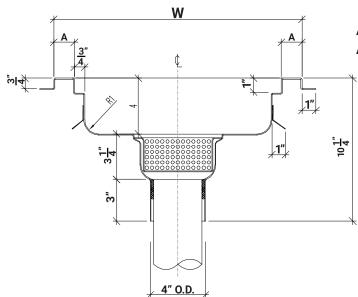

A = 1" for Troughs up to 15" Wide A = 1 1/2" for Troughs over 15" Wide


Box Out Size

Trough Area

Width (PIT) = Width ("W") + 4" Minimum
Length (PIT) = Length ("L") + 4" Minimum

- Depth (PIT) = Depth of Trough + ½" + Finish Floor

- Size of Rough-In Hole For Drains 7½" Ø Minimum



STANDARD DESIGN FLOOR TROUGHS

| Model | Size (W x L) |
|------------|--------------|------------|--------------|------------|--------------|------------|--------------|
| □ FT-1224 | 12" x 24" | □ FT-1824 | 18" x 24" | □ FT-2424 | 24" x 24" | □ FT-3024 | 30" x 24" |
| □ FT-1230 | 12" x 30" | □ FT-1830 | 18" x 30" | □ FT-2430 | 24" x 30" | □ FT-3030 | 30" x 30" |
| □ FT-1236 | 12" x 36" | □ FT-1836 | 18" x 36" | □ FT-2436 | 24" x 36" | □ FT-3036 | 30" x 36" |
| □ FT-1248 | 12" x 48" | □ FT-1848 | 18" x 48" | □ FT-2448 | 24" x 48" | □ FT-3048 | 30" x 48" |
| □ FT-1260 | 12" x 60" | □ FT-1860 | 18" x 60" | □ FT-2460 | 24" x 60" | □ FT-3060 | 30" x 60" |
| □ FT-1272 | 12" x 72" | □ FT-1872 | 18" x 72" | □ FT-2472 | 24" x 72" | □ FT-3072 | 30" x 72" |
| □ FT-1284 | 12" x 84" | □ FT-1884 | 18" x 84" | □ FT-2484 | 24" x 84" | □ FT-3084 | 30" x 84" |
| □ FT-1296 | 12" x 96" | □ FT-1896 | 18" x 96" | □ FT-2496 | 24" x 96" | □ FT-3096 | 30" x 96" |
| □ FT-12108 | 12" x 108" | □ FT-18108 | 18" x 108" | □ FT-24108 | 24" x 108" | □ FT-30108 | 30" x 108" |
| □ FT-12120 | 12" x 120" | □ FT-18120 | 18" x 120" | □ FT-24120 | 24" x 120" | □ FT-30120 | 30" x 120" |

Note - Standard troughs up to 96" have one (1) waste at center. Over 96", troughs have two (2) wastes equidistant.

Specifications subject to change without notice.