



- G1562** 15 Gallon Portable Eyewash/Drench Hose Unit
- G1561** 15 Gallon Portable Eyewash

**Application:** Self-contained eyewash and eyewash/drench hose units are ideal for use in low traffic areas, and where a continuous supply of potable water is unavailable for plumbed units. 15 gallon pressurized units are ideal for floor placement near any hazard, and deliver approximately 10 usable gallons (37.9 liters) of water for 15 minutes, thus complying with the provisions of ANSI Z358.1-2014 for eyewashes.

**Tank:** 15 gallon stainless steel pressurized tank with 10 gallons (37.9 liters) usable capacity. Tank has built-in carrying handles, Schrader air intake valve, pressure gauge and pressure relief valve.

**Eyewash Spray Head Assembly:** Two GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter.

**Eyewash Valve:** 1/2” IPS chrome plated brass stay-open ball valve with flag handle. Pressure regulator controls eyewash flow to 0.65 GPM for 15 minutes.

**Drench Hose Unit:** Auxiliary hand-held drench hose for rinsing eyes, face or body (G1562 only). Unit has single GS-Plus™ spray-type outlet head, self-closing valve with squeeze handle, and 6 ft. reinforced PVC hose.

**Operation:** To operate unit, fill with clean potable water and add bacteriostatic additive (supplied with unit). Additive protects against growth of bacteria, fungus, algae and acanthamoeba. After filling with water, pressurize unit to 80 PSI. If necessary, adjust pressure regulator to achieve maximum flow for 15 minutes. Unit should be inspected regularly and water should be changed at least once every six months. Filling instructions included.

**Weight:** 35.6 lbs. empty, 118.9 lbs. filled.

**Sign:** ANSI compliant identification sign permanently affixed to tank.

**Quality Assurance:** Unit is fully assembled, pressurized and water tested at the factory. Unit is depressurized and emptied prior to shipping. Some assembly required in field.

### Available Options

- G1540BA** 8 oz. bottle of bacteriostatic additive to protect against growth of bacteria, fungus, algae, and acanthamoeba. (One bottle is supplied with unit).
- G1562DLY** Custom-sized stainless steel dolly for easy transport and storage. Includes (4) chemical resistant polyolefin wheels with lockable casters. Caster stems prevent unit from sliding off platform.
- G1562HC** Two wheel hand cart for transporting and storing unit.




*Note: Shown with optional G1562DLY dolly (sold separately).*



□ **G1562** 15 Gallon Portable Eyewash/Drench Hose Unit

□ **G1561** 15 Gallon Portable Eyewash

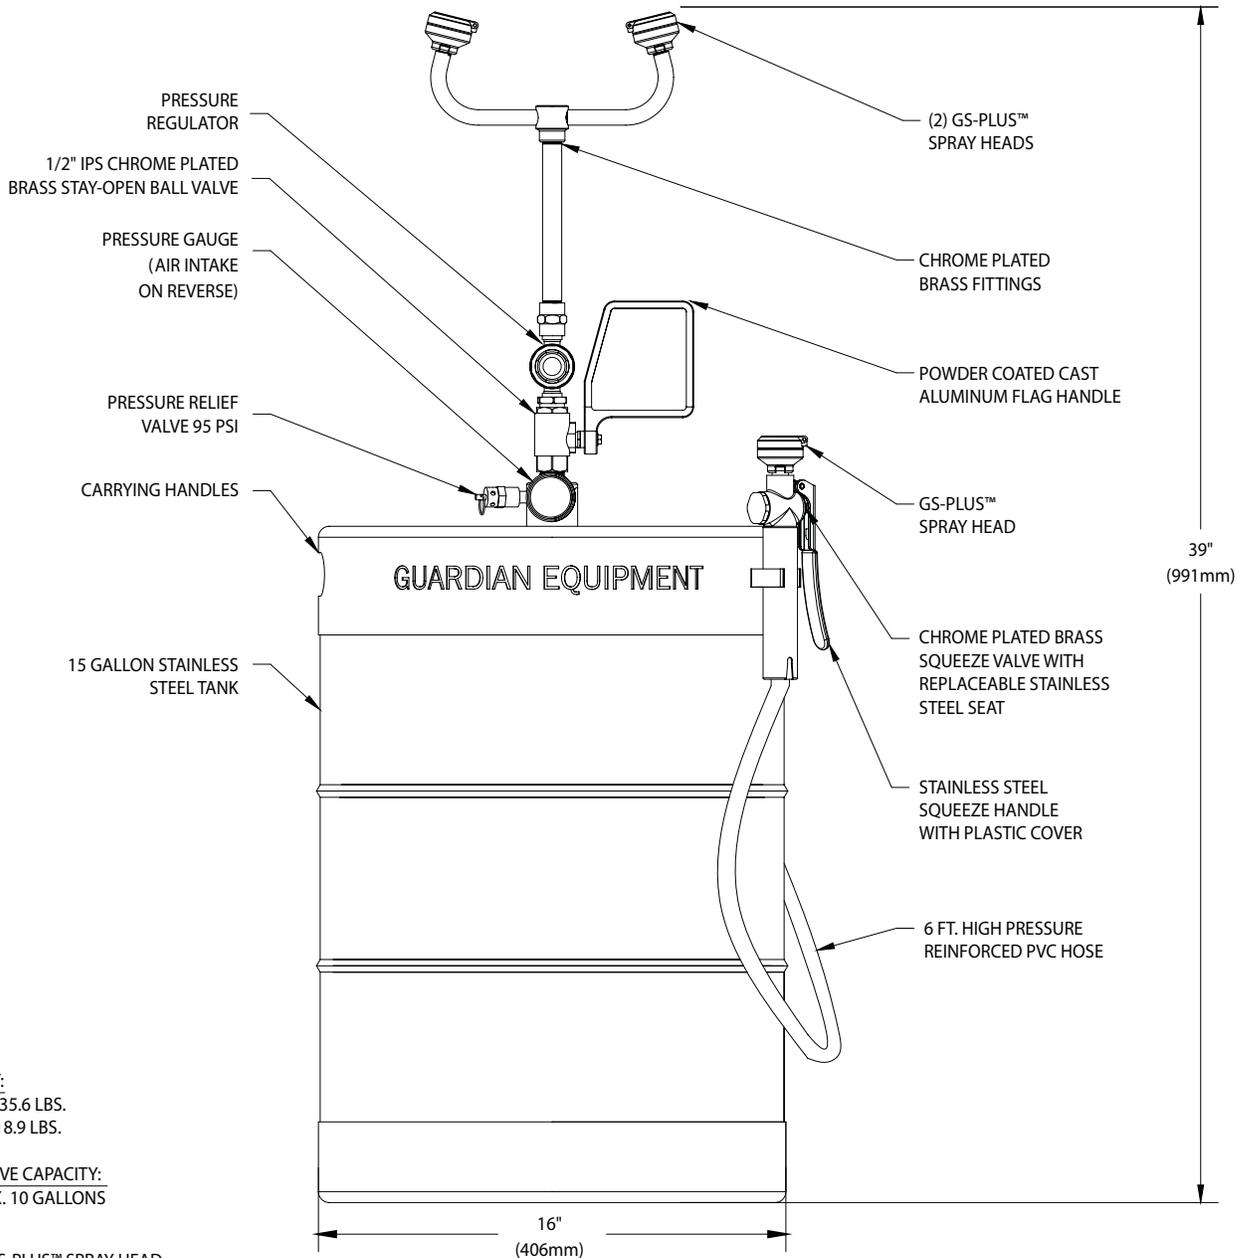

WEIGHT:  
EMPTY: 35.6 LBS.  
FULL: 118.9 LBS.

EFFECTIVE CAPACITY:  
APPROX. 10 GALLONS

NOTE:  
EACH GS-PLUS™ SPRAY HEAD HAS A "FLIP-TOP" DUST COVER, INTERNAL FLOW CONTROL AND FILTER TO REMOVE IMPURITIES FROM THE WATER FLOW.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Sign Included



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are  $\pm 1/4"$  (6mm). rev. 0817

Guardian Equipment 312 447 8100 TELEPHONE  
1140 N North Branch St 312 447 8101 FACSIMILE  
Chicago, IL 60642 gesafety.com

Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.

