




- ☐ **G1775** Eye/Face Wash, Deck Mounted 90° Swivel, Right Hand Mounting
- ☐ **G1775LH** Eye/Face Wash, Deck Mounted 90° Swivel, Left Hand Mounting

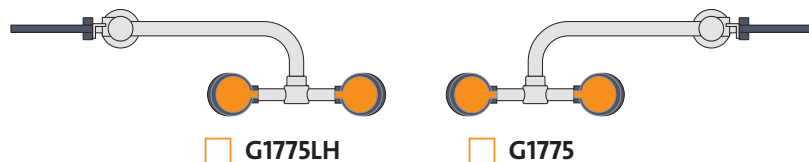

**Application:** Eye/face wash for mounting on counter next to sink. Spray heads swivel 90 degrees from storage to operational position. Water flow is activated by flag handle.

**Spray Head Assembly:** Two FS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

**Valve:** 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals.

**Mounting:** Unit may be mounted on right side (G1775) or left side (G1775LH) of sink. Furnished with locknut and washer for securing unit to countertop. Provide 7/8" diameter hole in counter.

**Construction:** Polished chrome plated brass.

**Supply:** 1/2" NPT male inlet.

**Sign:** ANSI-compliant identification sign.


**Quality Assurance:** Unit is completely assembled and water tested prior to shipment.

### Available Options

- ☐ **G3600LF** Thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014. Refer to “Tempering Valves” section for complete technical and product selection information.



- **G1775** Eye/Face Wash, Deck Mounted 90° Swivel, Right Hand Mounting
- **G1775LH** Eye/Face Wash, Deck Mounted 90° Swivel, Left Hand Mounting

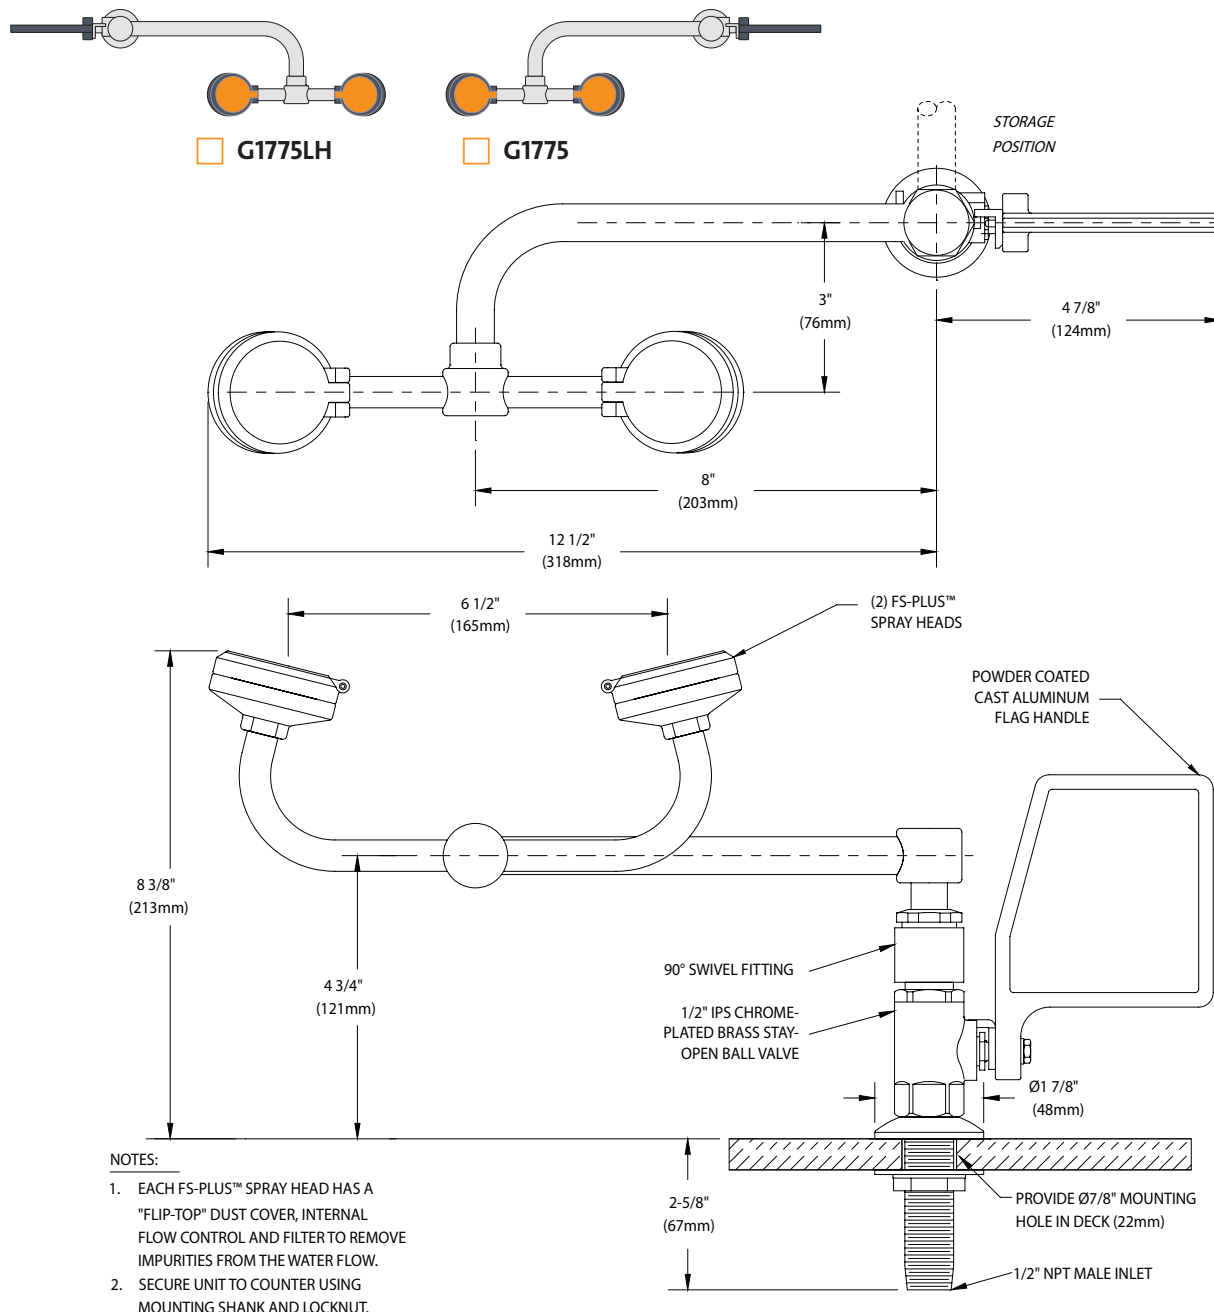

NOTES:

1. EACH FS-PLUS™ SPRAY HEAD HAS A "FLIP-TOP" DUST COVER, INTERNAL FLOW CONTROL AND FILTER TO REMOVE IMPURITIES FROM THE WATER FLOW.
2. SECURE UNIT TO COUNTER USING MOUNTING SHANK AND LOCKNUT.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Sign Included



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are  $\pm 1/4"$  (6mm). rev. 081018