



# Induction Green Heat

Garland Induction Tabletop Heat Retaining Unit RTCSmp Hold-Line

Item: \_\_\_\_\_  
Quantity: \_\_\_\_\_  
Project: \_\_\_\_\_  
Approval: \_\_\_\_\_  
Date: \_\_\_\_\_

Models:

☐ GI-HO 1500



Induction warm holding system  
consisting of:

Induction generator with two heat  
retaining/holding zones.

Equipped with the latest RTCSmp  
(Realtime Temperature Control System)  
technology.

## Standard Features

### 1 Induction generator:

A generator, developed specifically for heat retaining/holding,  
built in an aluminum enclosure, which includes an integrated  
air fan.

Fresh air is supplied by the fan, located at the bottom of the  
unit. The unit is also equipped with an air guiding system that  
directs the hot air out of the housing.

### 2 Heat retaining plate:

The heat retaining plate is equipped with the latest RTCSmp  
sensor technology which enables temperature controls in real-  
time. The set temperature is displayed via a 7-segment display  
underneath the ceramic glass. The heat retaining plate includes  
five (5) temperature sensors per zone.

The unit has two zones that can be controlled at different  
temperatures.

### 3 Control unit:

The control switches are located on the bottom sheet of the  
unit, easy accessible for the user.

The control unit regulates the temperature in an increment  
of 5°F (1°C) and this from 122-212°F (50 to 100°C). The set  
temperature and the current temperature are shown via the  
7-segment display that is located underneath the ceramic glass.

### Safety above all:

- RTCSmp electronic temperature control that monitors the  
state of the induction coil, power board, CPU and the ceramic  
glass temperature.
- RTCSmp monitors the energy supply.
- **No Pan No Heat – Only if an induction suitable pan is  
located on the glass that energy will be consumed.**

## Optional Features

- Optional induction ready holding pans are available, please  
contact your dealer for sizes and prices.



Intertek



Intertek



CE models comply with the latest European Norms:  
EN 60335-1, EN 60335-2-36, EN 62233 (EMC/EMV)

North American models:

ETL listed in compliance with

UL 197, CSA C22.2 No.109, NSF-4

Complies with FCC part 18, ICES-001

Induction Green Heat  
Garland Induction Tabletop Heat Retaining Unit RTCSmp Hold-Line


Garland Commercial Ranges Ltd.  
1177 Kamato Road,  
Mississauga, Ontario  
L4W 1X4 CANADA

General Inquiries 1-905-624-0260  
USA Sales, Parts and Service 1-800-424-2411  
Canadian Sales 1-888-442-7526  
Canada or USA Parts/Service 1-800-427-6668



# Induction Green Heat

## Garland Induction Tabletop Heat Retaining Unit RTCsmp Hold-Line

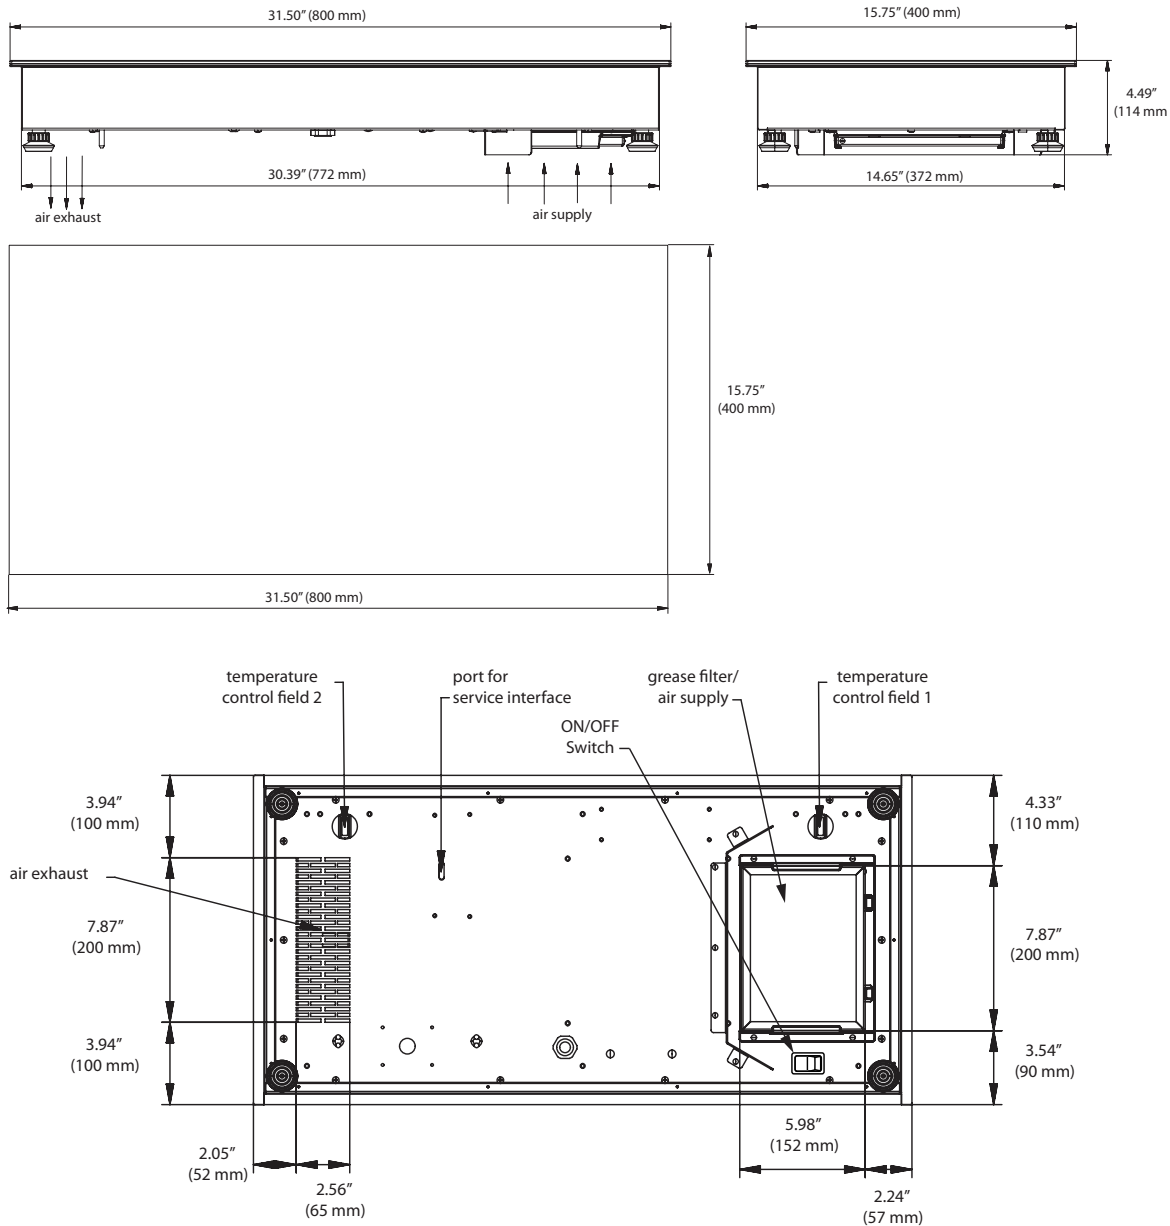

### Technical Data

Generator housing: 31.5"x15.75"x4.5" (800x400x114 mm)  
 Wattage: 120V, 1Ph, 1500W, 12A  
 Quantity of heat retaining zones: 2  
 Power per plate: 750W  
 Ceran glass: 31.5"x15.75"x0.16" (800x400x4 mm)

Garland/U.S. Range products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland / U.S. Range will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Form# GI-HO 1500 (12/19/13)