

Instinct Induction Countertop Single Hob

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- GIIC-SH3.5
- GIIC-SH5.0

powered by
INDUCS



GIIC-SH3.5

Standard Features

- Realtime Temperature Control System (RTCSmp)
- 12 power levels
- Warm/hold function from 25 to 100°C (77 to 212°F)
- Timer function
- Superior energy-efficiency
- Convenient and reliable
- Short heat-up times
- Overheat protection
- Easy to clean high-temperature Ceran™ glass top
- LED display
- Includes plug and cord (1.8m/6ft.)
- Simple and intuitive "Tap and Turn" knob
- Pan detector

Advanced Features

- RTCSmp control/monitoring
- Height-adjustable, locking feet
- Washable air filter
- Incoming voltage detection
- Easy power reduction
- Quiet ventilation for less noise

Specifications

Continuous temperature measurement at the bottom of the pan with Realtime Temperature Control System multi-point technology (RTCSmp).

The reliable overheating protection prolongs the service life of both the induction appliance and the cookware.

Consistent power transfer over the entire cooking time for optimal cooking results.

Convenient cooking without heating up the cooking environment thanks to direct heat transfer from the hob to the pan by means of induction.

Easy to clean thanks to a removable, washable and reusable air filter.

Cool to touch cooking surface, means no "burn on" of food debris on the cooking surface.

Exceptionally robust and developed for continuous operation in the restaurant industry.

Conversion of the temperature display from °C to degrees °F

Reduction of the maximum power from 100% to 25%.

Mains voltage detection and automatic loading of the optimal parameters. Single-phase version (up to 3.5 kW) at 208V - 240V: identical worldwide.

Automatic pan detection to vary the operating frequency to match the quality of the pan being used

The unit fits the power that the operator has available.

Automatic shut-off feature prohibits overheating.

Warranty: 2 years on parts & labor (US and Canada only).

NOTE: Induction cooking requires use of induction-compatible cookware.

North American models: ETL listed in compliance with, CSA C22.2 No.109, NSF-4 Complies with FCC part 18, ICES-001.



Intertek

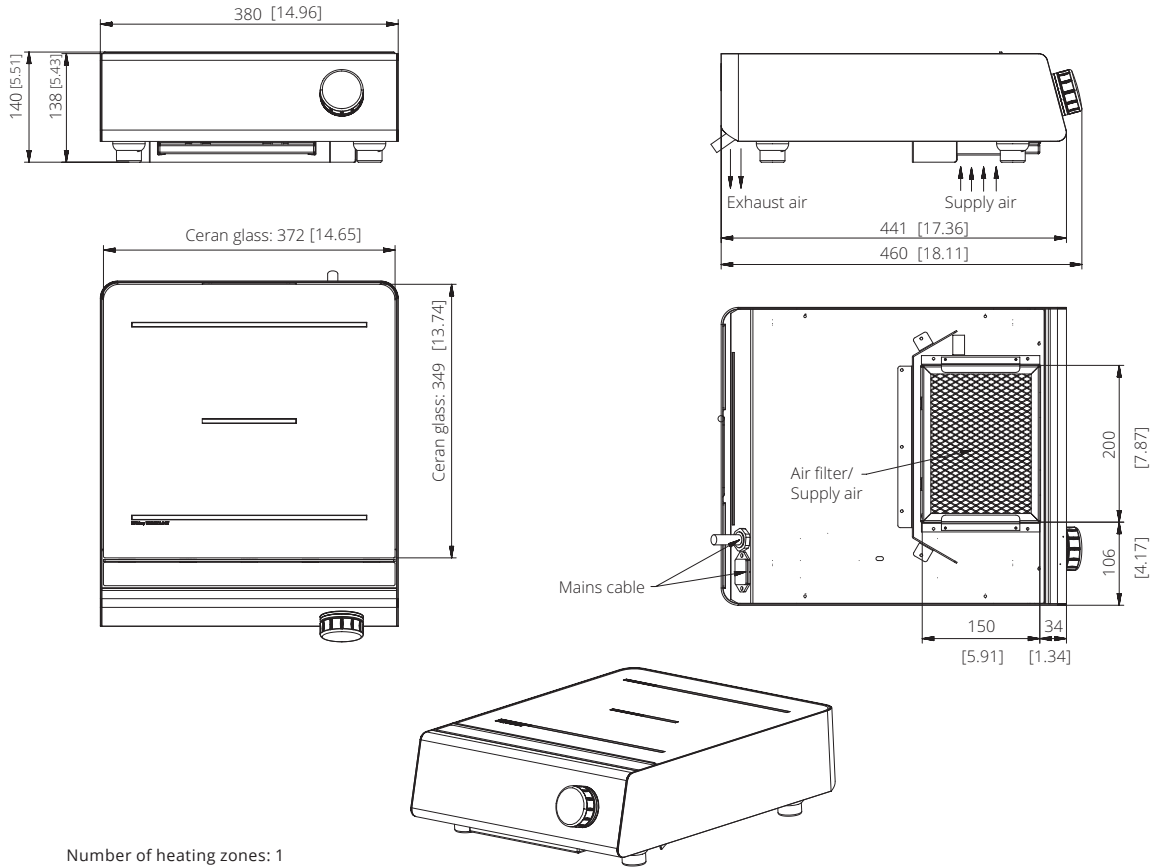


Intertek







Instinct Induction Countertop Single Hob

Dimensions are specified in mm [inches]



Number of heating zones: 1
 Ceran glass surface: 372 x 349 mm [14.65 x 13.74 inches]
 Inductor diameter: \varnothing 220 mm [8.7 inches]
 Power levels: 12
 Warm-hold function: 25 to 100°C / 77 to 212°F
 Housing: stainless steel

Model	GIIC-SH3.5		GIIC-SH5.0	
Part Number	99560029		99560027	99570028
Dimension W x D x H	380 x 460 x 140 mm [14.96 x 18.11 x 5.51 inches]		380 x 460 x 140 mm [14.96 x 18.11 x 5.51 inches]	
Weight	12 kg [27 lbs]		12 kg [27 lbs]	
Electrical Specifications (EU/US)	Single Phase		3 Phases	
Power, Watts	3500W		5000W	
Electrical supply V/Hz	208-240 V/50-60 Hz/1 16A		208-240 V/50-60 Hz/3 14A	380-440 V/50-60 Hz/3 8A
Plug	 EU1-16P	 NEMA 6-20P	 NEMA L15-20P	 EU 5-Pole
Shipping Information				
Dimensions W x D x H	670 x 470 x 240 mm [26.38 x 18.51 x 9.45 inches]		670 x 470 x 240 mm [26.38 x 18.51 x 9.45 inches]	
Weight	15 kg [34 lbs]		15 kg [34 lbs]	
Cu. Ft.	3		3	

Note:
 Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only.
 Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
 1177 Kamato Road,
 Mississauga, Ontario
 L4W 1X4 CANADA

General Inquires 1-905-624-0260
 USA Sales, Parts and Service 1-800-424-2411
 Canadian Sales 1-888-442-7526
 Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
 8148D
 08/25

