

- ☐ **GBF1635** Barrier-Free Emergency Shower, Vertically Mounted, Plastic Shower Head
- ☐ **GBF1635SSH** Barrier-Free Emergency Shower, Vertically Mounted, Stainless Steel Shower Head

**Application:** Barrier-Free emergency shower for vertical mounting. Unit should be installed so that shower head is at least 82" above floor and 32" from wall or nearest obstruction.

**ADA Compliance:** When installed at recommended mounting heights, unit complies with ADA requirements for accessibility by handicapped persons (maximum height and reach and distance from obstructions).

**Shower Head:** 10" diameter orange ABS plastic (GBF1635) or stainless steel (GBF1635SSH), with 20 GPM flow control.


**Valve:** 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Furnished with stainless steel actuating arm and 59-1/2" stainless steel pull rod.

**Supply:** 1" NPT female inlet.

**Sign:** ANSI-compliant identification sign.


### Available Options

- ☐ **GRN** Green ABS plastic shower head.
- ☐ **YEL** Yellow ABS plastic shower head.
- ☐ **G3800LF** Thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014. Refer to "Tempering Valves" section for complete technical and product selection information.

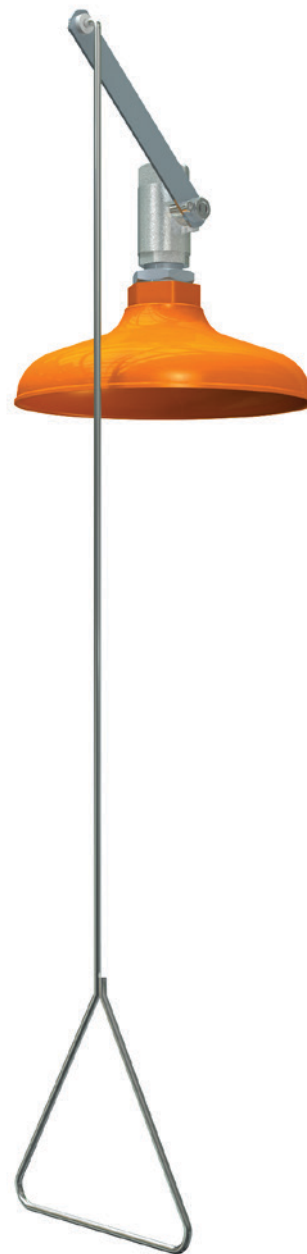



- **GBF1635** Barrier-Free Emergency Shower, Vertically Mounted, Plastic Shower Head
- **GBF1635SSH** Barrier-Free Emergency Shower, Vertically Mounted, Stainless Steel Shower Head

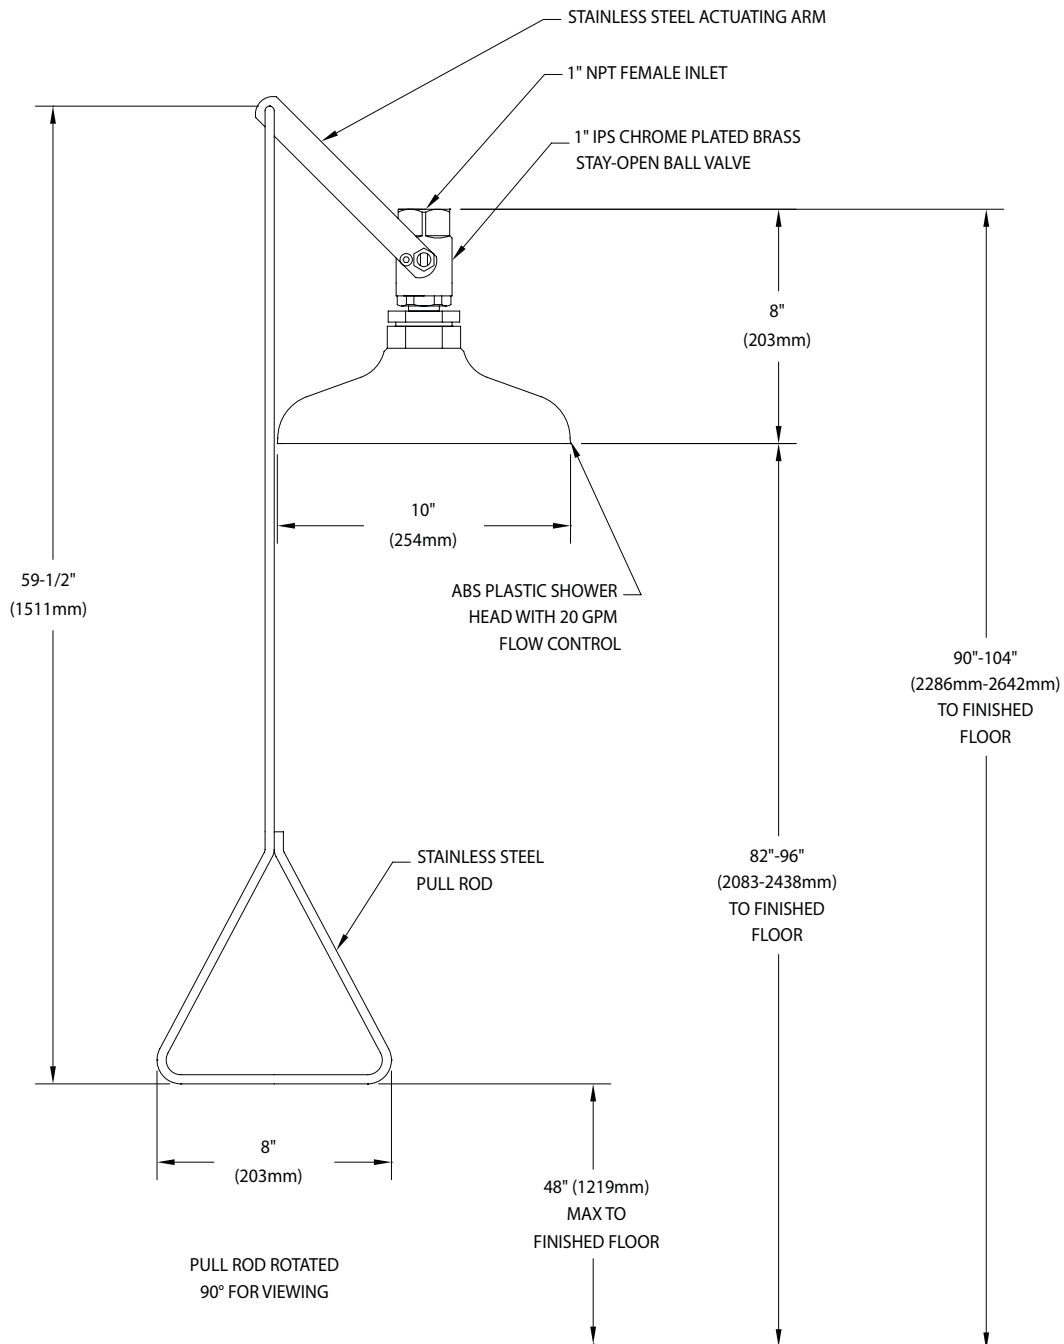

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are  $\pm 1/4"$  (6mm). rev. 1017

Sign Included

