

☐ **GBFVR1909** Vandal-Resistant Safety Station with WideArea™ Eye/Face Wash

Application: Combination WideArea™ eye/face wash and shower safety station with vandal-resistant construction. Ideal for use in schools and other areas where equipment may be subject to abuse.

ADA Compliance: Unit complies with ADA requirements for accessibility by handicapped persons (maximum height and reach, minimum knee clearance and distance from obstructions).

Shower Head: 10" diameter stainless steel with 20 GPM flow control.

Shower Valve: 1" IPS chrome plated brass valve with stainless steel actuating arm and 29" stainless steel pull rod.

Spray Head Assembly: Each vandal-resistant GS-Plus™ spray head has a "flip-top" dust cover, internal flow control and filter to remove impurities from the water flow.

Eye/Face Wash Bowl: 11-1/8" stainless steel.

Eye/Face Wash Valve: 1/2" IPS chrome plated brass stay-open ball valve with flag handle.

Pipe and Fittings: Schedule 40 galvanized steel. Furnished with orange polyethylene covers on piping for high visibility and corrosion resistance.

Supply: 1-1/4" NPT female top and side inlet.


Waste: 1-1/4" NPT female outlet.

Sign: ANSI-compliant identification sign.

Quality Assurance: Valve, bowl and spray head assemblies are factory assembled and water tested prior to shipment.


Available Options

- ☐ **APBF250-015** Modesty curtain for mounting on safety station.
- ☐ **AP275-200** Electric flashing light and alarm horn unit for mounting on wall or vertical pipe. Light illuminates and horn sounds when eye/face wash or shower is activated. Furnished complete with flow switch and mounting hardware.
- ☐ **G3800LF** Thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014. Refer to "Tempering Valves" section for complete technical and product selection information.

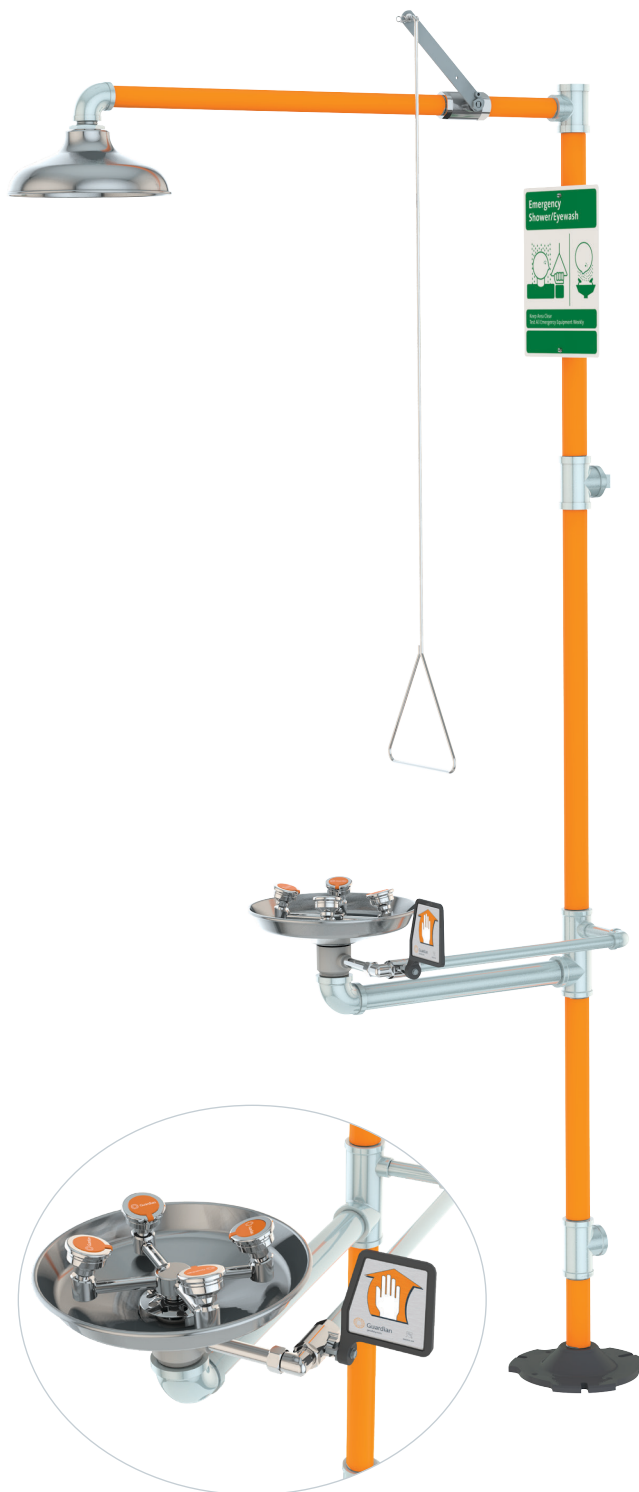



GBFVR1909 Vandal-Resistant Safety Station with WideArea™ Eye/Face Wash

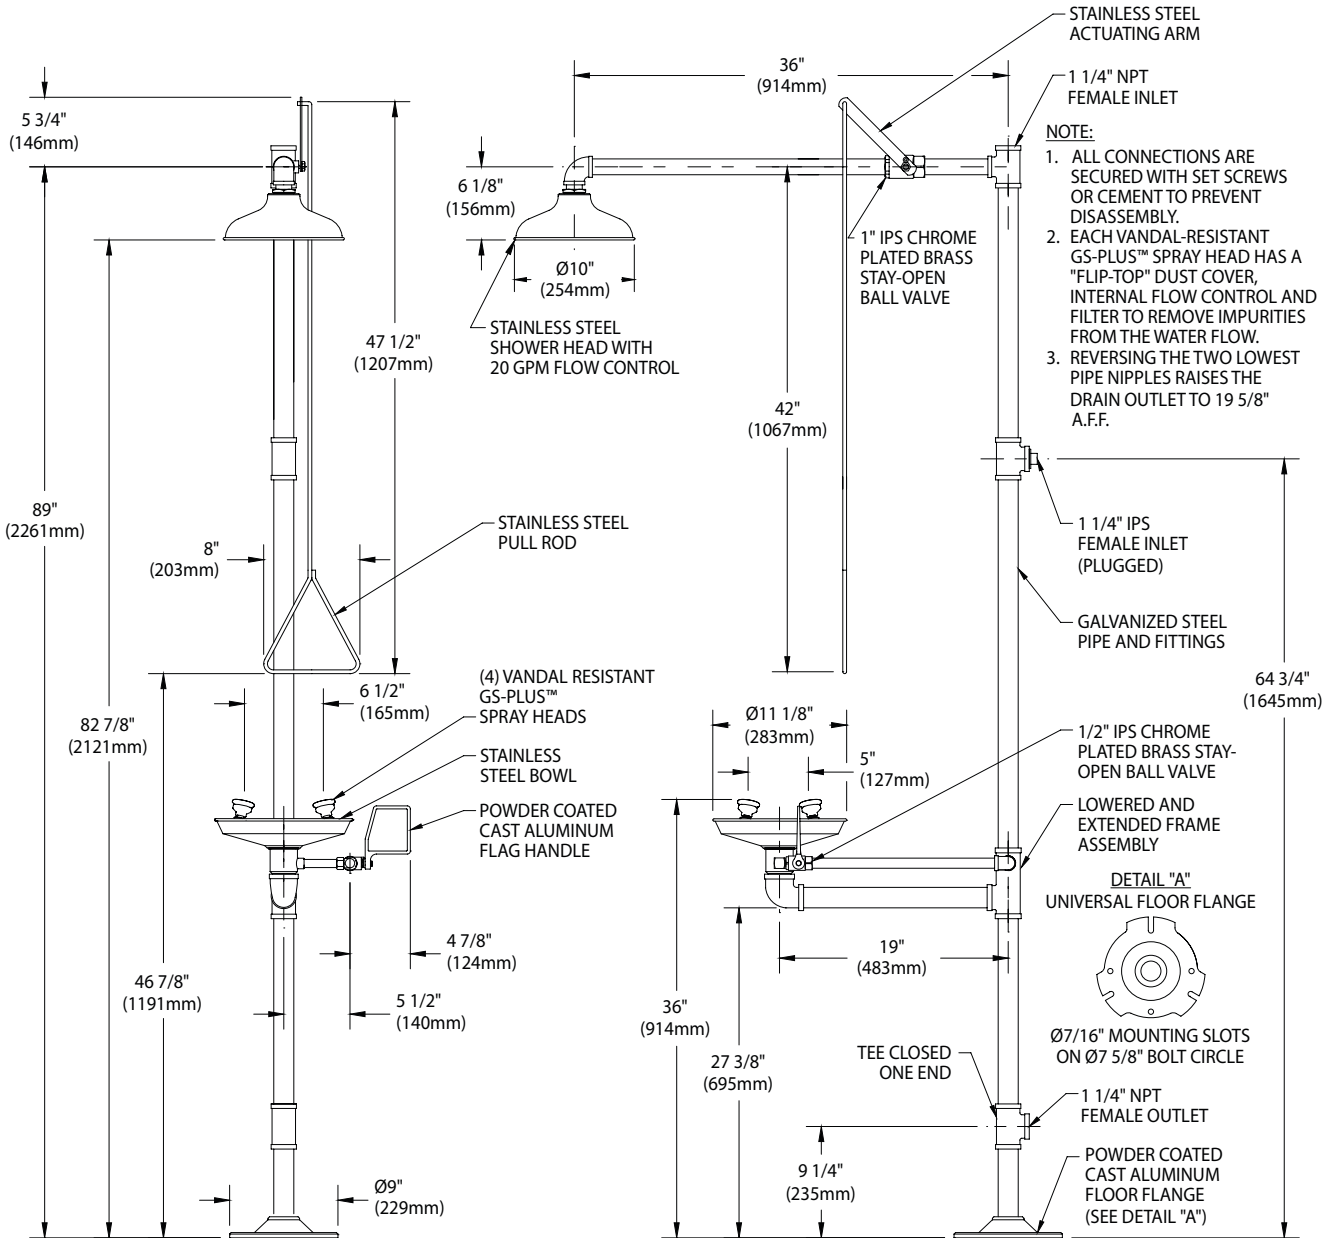

Rev. 041219

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 1/4"$ (6mm). rev. 041219

