

- ☐ **GFR1205** Freeze-Resistant Emergency Shower, Horizontally Mounted, Plastic Shower Head
- ☐ **GFR1205SSH** Freeze-Resistant Emergency Shower, Horizontally Mounted, Stainless Steel Shower Head

Application: Freeze-resistant emergency shower for horizontal mounting. Valve and supply line are located behind wall in heated area to prevent freezing. Since unit is intended for use in cold weather conditions, consideration should be given to supplying unit with tempered water in accordance with ANSI Z358.1-2014. See “Tempering Valves” section for more information.

Shower Head: 10" diameter with 20 GPM flow control. Shower head is orange ABS plastic (GFR1205) or stainless steel (GFR1205SSH).

Valve: 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Valve handle is mounted on extension rod that projects through wall. *Note: Specify wall thickness when ordering.*

Pipe and Fittings: Supplied by others.

Supply: 1" NPT female inlet.

Sign: ANSI-compliant identification sign.


Available Options

- ☐ **GRN** Safety green ABS plastic shower head.
- ☐ **YEL** Safety yellow ABS plastic shower head.
- ☐ **AP280-200** Electric flashing light and alarm horn unit for mounting on wall or vertical pipe. Light illuminates and horn sounds when shower is activated. Furnished complete with flow switch and mounting hardware.
- ☐ **G3800LF** Thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014. Refer to “Tempering Valves” section for complete technical and product selection information.





- **GFR1205** Freeze-Resistant Emergency Shower, Horizontally Mounted, Plastic Shower Head
- **GFR1205SSH** Freeze-Resistant Emergency Shower, Horizontally Mounted, Stainless Steel Shower Head

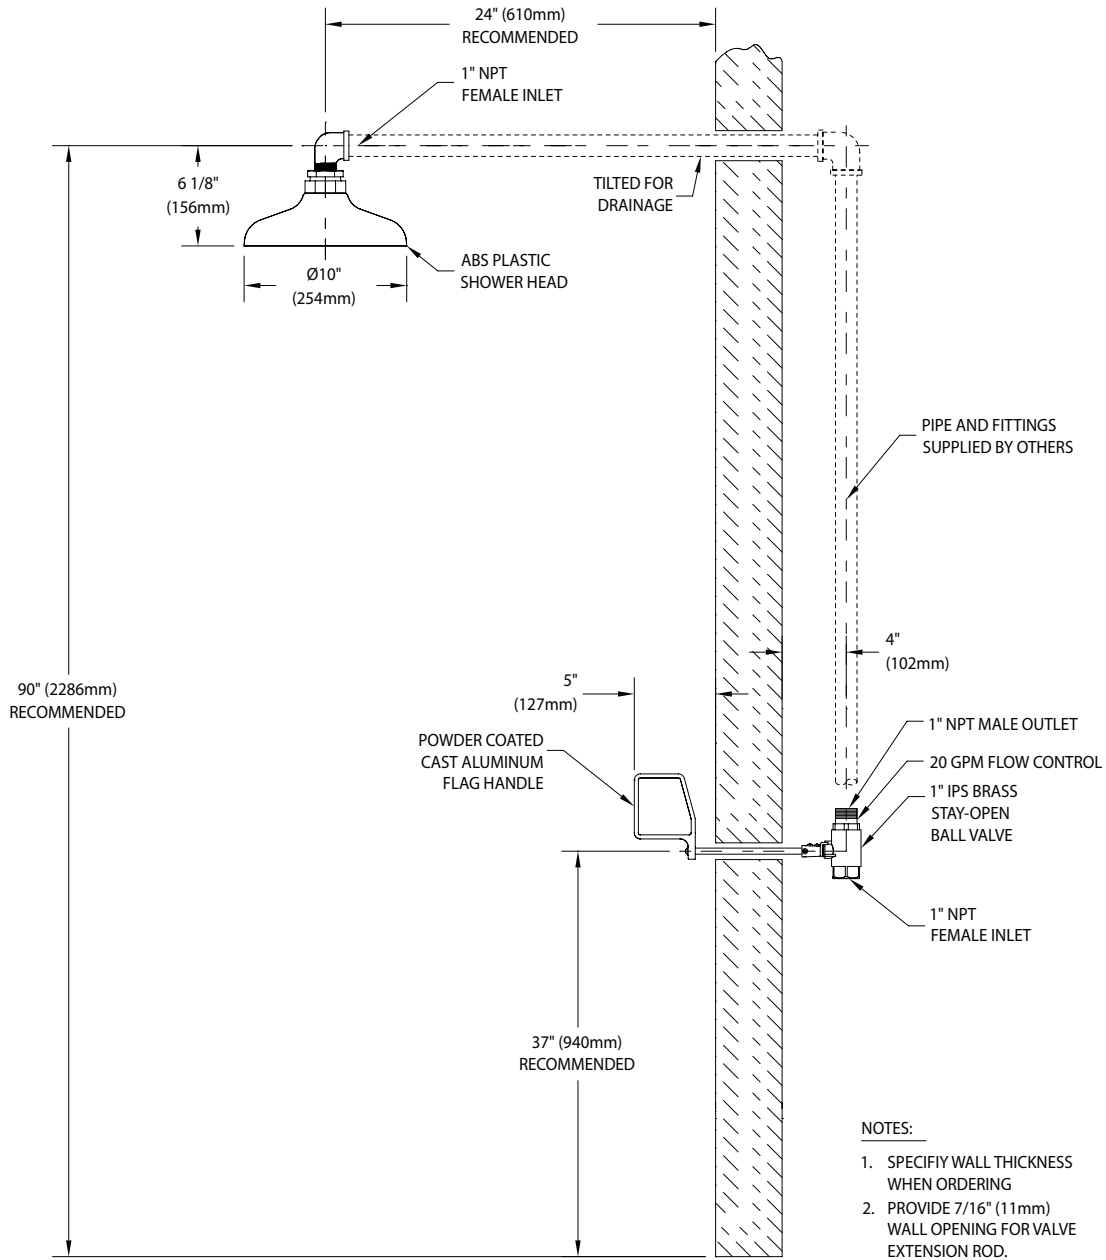

NOTES:

1. SPECIFY WALL THICKNESS WHEN ORDERING
2. PROVIDE 7/16" (11mm) WALL OPENING FOR VALVE EXTENSION ROD.

Rev. 041018

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 1/4"$ (6mm). rev. 050818

Sign Included

