



- GFR1902** Freeze-Resistant Safety Station with Eyewash, Plastic Shower Head
- GFR1902SSH** Freeze-Resistant Safety Station with Eyewash, Stainless Steel Shower Head

**Application:** Freeze-resistant combination eyewash and shower safety station. Freeze-resistant valves and supply lines are buried below frost line to protect against freezing. Unit is designed to drain completely after use, so that no standing water remains in unit and possibility of freeze-up is eliminated. Since unit is intended for use in cold weather conditions, consideration should be given to supplying unit with tempered water in accordance with ANSI Z358.1-2014. See “Tempering Valves” section for more information.

**Shower Head:** 10" diameter with 20 GPM flow control. Shower head is orange ABS plastic (GFR1902) or stainless steel (GFR1902SSH).

**Shower Valve:** 1-1/4" IPS freeze-resistant valve with push plate. Valve body and supply line are buried below frost line to prevent freezing. Valve has 1/8" IPS bleed outlet to permit water standing in unit to drain out after use. *Note: Specify bury depth of valve when ordering.*

**Spray Head Assembly:** Two GS-Plus™ spray heads. Each spray head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

**Eyewash Bowl:** 11-1/8" diameter stainless steel.

**Eyewash Valve:** 3/4" IPS freeze-resistant valve with push plate. Valve body and supply line are buried below frost line to prevent freezing. Valve has 1/8" IPS bleed outlet to permit water standing in unit to drain out after use. *Note: Specify bury depth of valve when ordering.*

**Pipe and Fittings:** Schedule 40 galvanized steel. Furnished with orange polyethylene pipe covers for high visibility and corrosion resistance.

**Supply:** 3/4" NPT female inlet (eyewash valve) and 1-1/4" NPT male inlet (shower valve).

**Waste:** 1-1/4" NPT female outlet.

**Sign:** ANSI-compliant identification sign.

**Quality Assurance:** Valve and spray head assemblies are factory assembled and water tested prior to shipment.


### Available Options

- GRN** Safety green ABS plastic shower head.
- YEL** Safety yellow ABS plastic shower head.
- AP250-015** Modesty curtain for mounting on safety station.





- GFR1902** Freeze-Resistant Safety Station with Eyewash, Plastic Shower Head
- GFR1902SSH** Freeze-Resistant Safety Station with Eyewash, Stainless Steel Shower Head

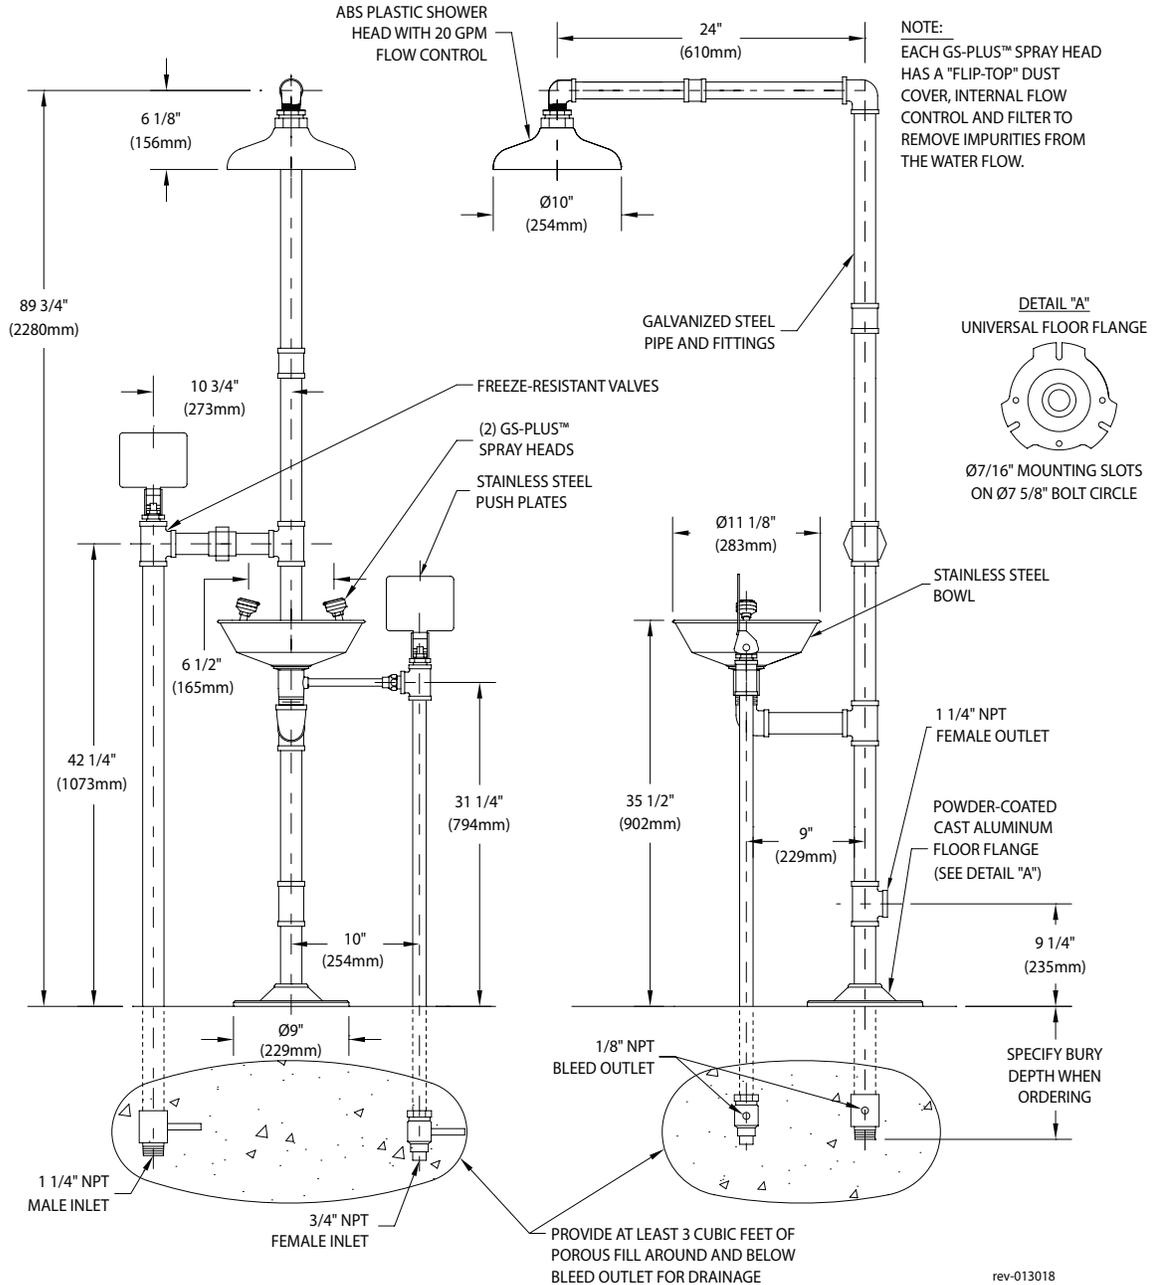

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 0218

Sign Included



Guardian Equipment 312 447 8100 TELEPHONE  
 1140 N North Branch St 312 447 8101 FACSIMILE  
 Chicago, IL 60642 gesafety.com

Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.

