

- ☐ **GFR1909** Freeze-Resistant Safety Station with WideArea™ Eye/Face Wash, Plastic Shower Head
- ☐ **GFR1909SSH** Freeze-Resistant Safety Station with WideArea™ Eye/Face Wash, Stainless Steel Shower Head

**Application:** Freeze-resistant combination WideArea™ eye/face wash and shower safety station. Freeze-resistant valves and supply lines are buried below frost line to protect against freezing. Unit is designed to drain completely after use, so that no standing water remains in unit and possibility of freeze-up is eliminated. Since unit is intended for use in cold weather conditions, consideration should be given to supplying unit with tempered water in accordance with ANSI Z358.1-2014. See “Tempering Valves” section for more information.

**Shower Head:** 10" diameter with 20 GPM flow control. Shower head is orange ABS plastic (GFR1909) or stainless steel (GFR1909SSH).

**Shower Valve:** 1-1/4" IPS freeze-resistant valve with push plate. Valve body and supply line are buried below frost line to prevent freezing. Valve has 1/8" IPS bleed outlet to permit water standing in unit to drain out after use. *Note: Specify bury depth of valve when ordering.*

**Spray Head Assembly:** Four GS-Plus™ spray heads. Each head has a “flip top” dust cover, internal flow control and filter to remove impurities from the water flow.

**Eye/Face Wash Bowl:** 11-1/8" diameter stainless steel.

**Eye/Face Wash Valve:** 3/4" IPS freeze-resistant valve with push plate. Valve body and supply line are buried below frost line to prevent freezing. Valve has 1/8" IPS bleed outlet to permit water standing in unit to drain out after use. *Note: Specify bury depth of valve when ordering.*

**Pipe and Fittings:** Schedule 40 galvanized steel. Furnished with orange polyethylene pipe covers for high visibility and corrosion resistance.

**Supply:** 3/4" NPT female inlet (eye/face wash valve) and 1-1/4" NPT male inlet (shower valve).

**Waste:** 1-1/4" NPT female outlet.

**Sign:** ANSI-compliant identification sign.

**Quality Assurance:** Valve and spray head assemblies are factory assembled and water tested prior to shipment.


### Available Options

- ☐ **GRN** Safety green ABS plastic shower head.
- ☐ **YEL** Safety yellow ABS plastic shower head.
- ☐ **AP250-015** Modesty curtain for mounting on safety station.





- GFR1909** Freeze-Resistant Safety Station with WideArea™ Eye/Face Wash, Plastic Shower Head
- GFR1909SSH** Freeze-Resistant Safety Station with WideArea™ Eye/Face Wash, Stainless Steel Shower Head

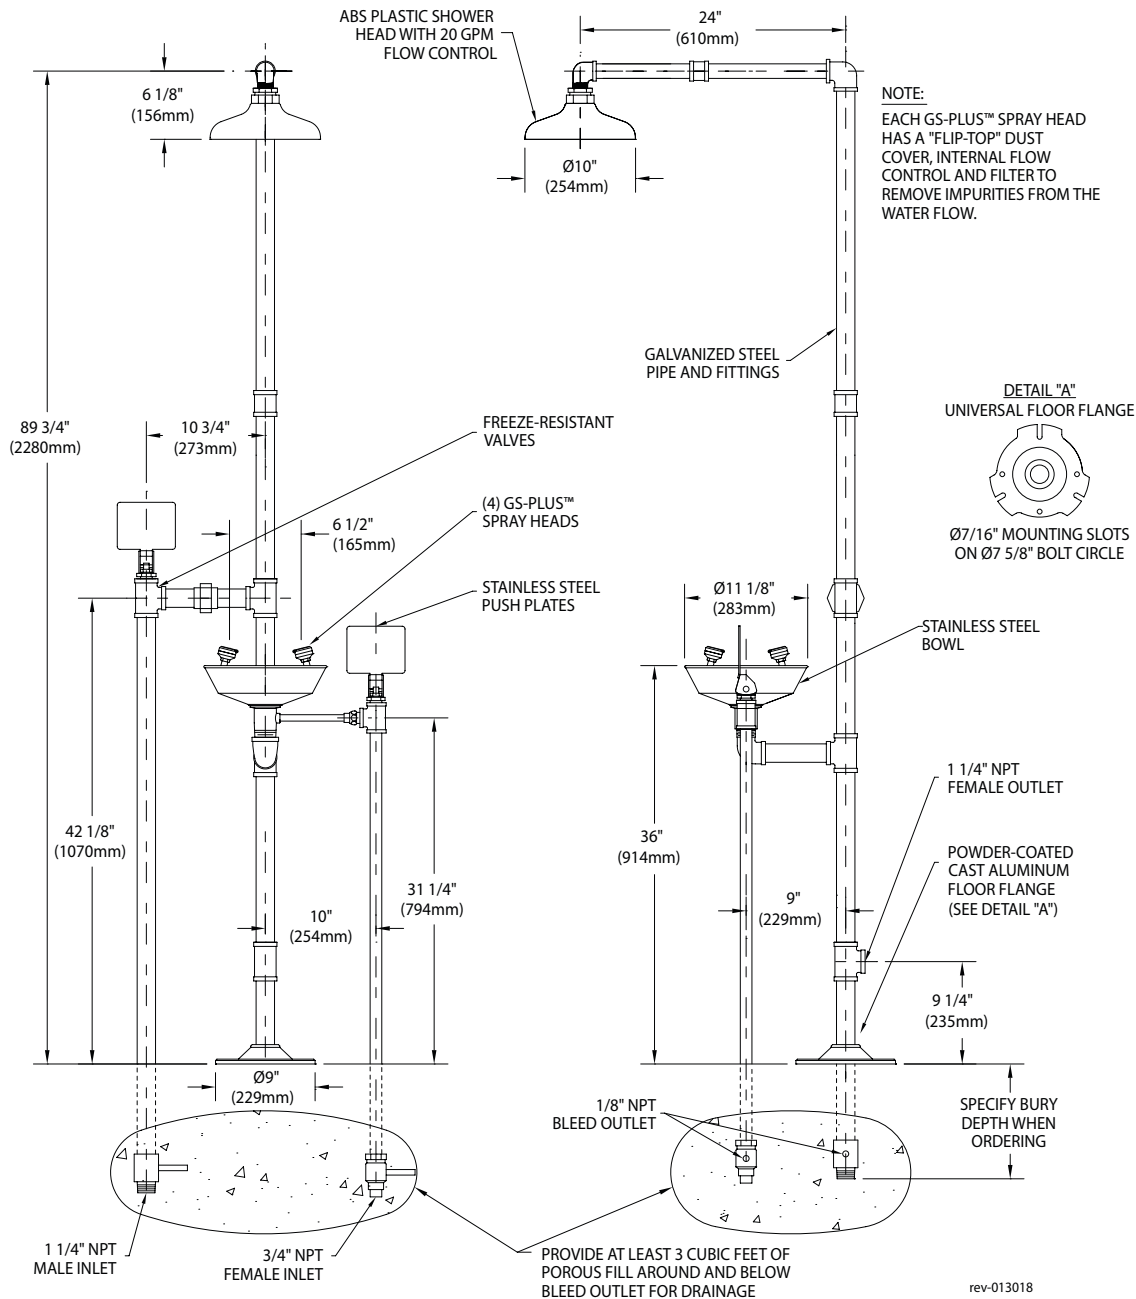

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are  $\pm 1/4$ " (6mm). rev. 0218

Sign Included

