



# CEILING MOUNTED WARMERS



**SHADE STYLES**

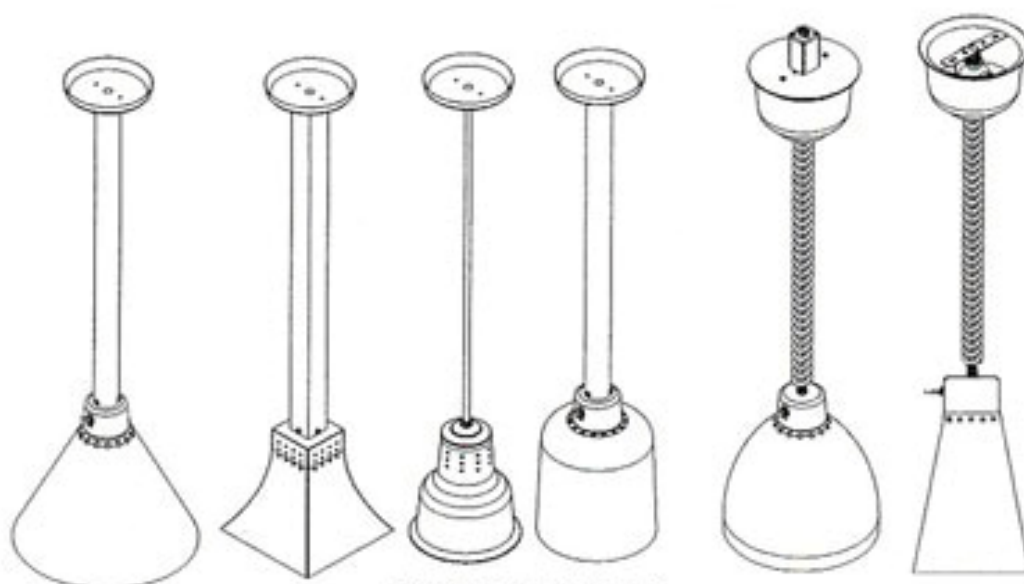

**STYLE-400**  
11.0" X 10"  
Diameter X Length  
279 mm X 203mm




**STYLE-500**  
7 1/4" X 7 3/8"  
Square X Length  
184mm X 187mm




**STYLE-600**  
6 1/4" X 10"  
Diameter X Length  
165 mm X 203mm



**STYLE-700**  
7 X 10"  
Diameter X Length  
178 mm X 203mm



**STYLE-800**  
11 1/8" X 10"  
Diameter X Length  
283 mm X 203mm



**STYLE - 900**  
6.75 X 11.0"  
Diameter X Length  
228mm X 279mm

## MOUNTING OPTIONS



**TYPE "SMT"**  
Rigid ceiling.  
3/8" diameter  
down tube  
78" maximum  
overall length.  
Please specify  
overall length.



**TYPE LGT**  
Rigid ceiling 1 1/2"  
diameter  
78" maximum  
overall length.  
Please specify  
overall length.



**TYPE "C"**  
Cord mount.  
Cord color black  
Please specify  
overall length.



**TYPE "RET  
SHORT"**  
Retractable cord  
ceiling mount.  
Height adjustable  
from ceiling 31"-  
49"



**TYPE "RET  
MEDIUM"**  
Retractable cord  
ceiling mount.  
Height adjustable  
from ceiling 50"-  
75"



**TYPE "RET  
LONG"**  
Retractable cord  
mount.  
Height adjustable  
from ceiling 67"-  
99"

**Description:** Single warmer fixture available in six distinctive shades styles to match any decor. All fixtures are constructed using the finest materials and components available. Lamp body and switch holder are constructed from heavy gauge spun aluminum. Standard finishes are brass, bright copper, smoked copper, polished chrome, brushed chrome( stainless look), and powder coat (custom finishes are also available). Brass and copper finishes have a clear baked enamel topcoat that is easy to clean and also eliminates tarnishing and need to polish. All internal components including lamp socket and wiring are high temperature rated (200°C). Each shade style is available with all mounting types providing a solution for any warming application. **Note:** All mounting options can be track mounted. All mounting options can have switch.

Specifications	
<b>Mechanical</b>	
Parameter	Value
Light head	Brass, bright copper, smoked copper, polished chrome, brushed chrome, powder coat or custom.
Light head sizes	Range from 6 1/2"-11" diameter x 7 3/8"-8" long
Light head height from countertop	Infinitely adjustable depending on cord or ceiling down tube selected.
Switch holder(Optional)	Brass, bright copper, smoked copper, polished chrome, brushed chrome, or powder coat. 2 7/8" diameter x 2" tall
Ceiling cover	Brass, bright copper, smoked copper, polished chrome, brushed chrome, powder coat, or custom.
Shipping weight	Approximately 5 pounds
Internal wiring	18 gauge Silver stranded with Teflon insulation. Rated (200° C)
Lamp socket	Glazed porcelain/nickel. Rated (200° C)
Switch(Optional)	On/Off rated 15 amps @ 115 VAC
Cord	115 VAC-18 gauge 3 conductor cable 230 VAC-18 gauge 3 conductor harmonized cable
<b>Electrical</b>	
Operating Voltage	115-230, VAC 50-60 Hz, single phase
Power	250 watts Maximum
Operating amperage	2.25 amps (115 VAC) 1.25 amps (230 VAC)
Lamp type	Infrared 250 watts maximum, shatterproof design.
<b>Safety Listings</b>	
Organizations	