

SLM Free Standing Single Lamps

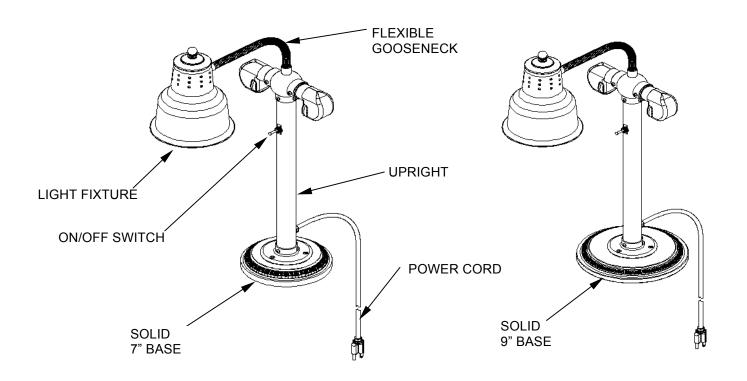

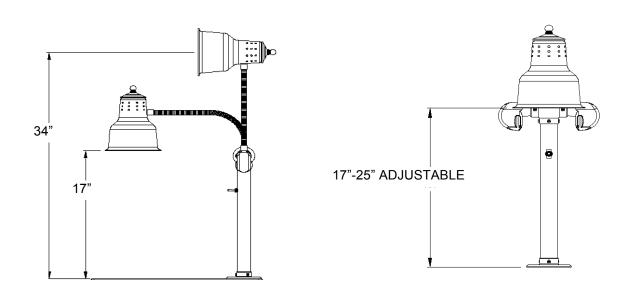

BASES NOT SHOWN FOR CLARITY

Hanson Brass Products 7530 San Fernando Road, Sun Valley, California, 91352 Toll Free (888) 841-3773, Fax (818) 767-7891 Website: www.hansonbrass.com

SLM Free Standing Single Lamps

Description: Single heat lamp fixture mounted on a 7" or 9" solid or antique base. CH models denote mirror polished Stainless Steel construction. BR models denote Brass construction with baked-on enamel finish to eliminate need for polishing. All internal components including lamp sockets and wiring are high temperature rated (200°C). Switch is rated for 15 amps @ 120 volts. Power cord exits through back of upright.

Standard Models		
Model Number	Description	
SLM/RB9/SOL/BR	•	le lamp warmer on 9" solid base, Polished Brass
SLM/RB9/SOL/CH		le lamp warmer on 9" solid base Mirror Polished S.S.
SLM/RB9/SOL/BC	Free standing sing	le lamp warmer on 9" solid base Bright Copper finish
SLM/RB9/SOL/SC		le lamp warmer on 9" solid base Smoked Copper
SLM/RB9/SOL/SS		le lamp warmer on 9" solid base Brushed Stainless
SLM/RB9/ANT/BR		le lamp warmer on 9" solid base Polished Brass
SLM/RB9/ANT/CH		le lamp warmer on 9" antique base Mirror Polished SS
SLM/RB9/ANT/SS		le lamp warmer on 9" antique base Brushed Stainless
Custom Finishes Available		
Specifications		
Mechanical		
Parameter		Value
Light head		Approximately Ø6.50" x 9.0" long
Light head height from mounting		Adjustable 17"-25"
surface		
Shipping weight		Approximately 18 pounds
Internal wiring		18 gauge Silver stranded with Teflon insulation.
		Rated (200° C)
Lamp socket		Glazed porcelain/nickel. Rated (200° C)
Switch		On/Off rated 15 amps @ 115 VAC
Power cord		115 VAC-18 gauge 3 conductor cable 84" long with
		Nema 5-15P plug (standard)
		230 VAC-18 gauge 3 conductor harmonized cable
Floatrical		84" long with Schuko plug (standard).
Electrical Operating Voltage		445 220 VAC 50 CO H= circula mbass
Operating Voltage Power		115-230, VAC 50-60 Hz, single phase 250 watts Maximum
Operating amperage Lamp type		2.25 amps (115 VAC) 1.25 amps (230 VAC) Infrared 250 watts maximum, shatterproof design
Safety Listings		minared 200 watts maximum, shatterproof design
Organizations		
Organizations		
		CANITATION CONTRACTOR
		C LIETED US
		- ASIE - CM