



# model SP154DPDT

Flow Switch

## FEATURES & BENEFITS

### CONSTRUCTION

Solid brass body construction, explosion proof electrical box, and wire push-in connection terminals.

## OPTIONS

For more information, visit [www.hawsc.com](http://www.hawsc.com) or call (888) 640-4297.



## SPECIFICATIONS


Model SP154DPDT is a flow switch for use with the 9001 and 9001EXP alarms. Switch will activate at 2.4 gallons (9 L) per minute of flow. AC, 125/250 volts, 5 amps, double pole, double throw. 1-1/4" NPT inlet and outlet. Class 1, Division 1, Group B, C, D. UL Listed.

## APPLICATIONS

Model SP154DPDT flow switch is suitable for a number of emergency applications where water flow detection is needed to alert the appropriate entities of a possible serious situation.

**NOTE:**

DASHED LINES DENOTE FIELD PIPING (NOT SUPPLIED).

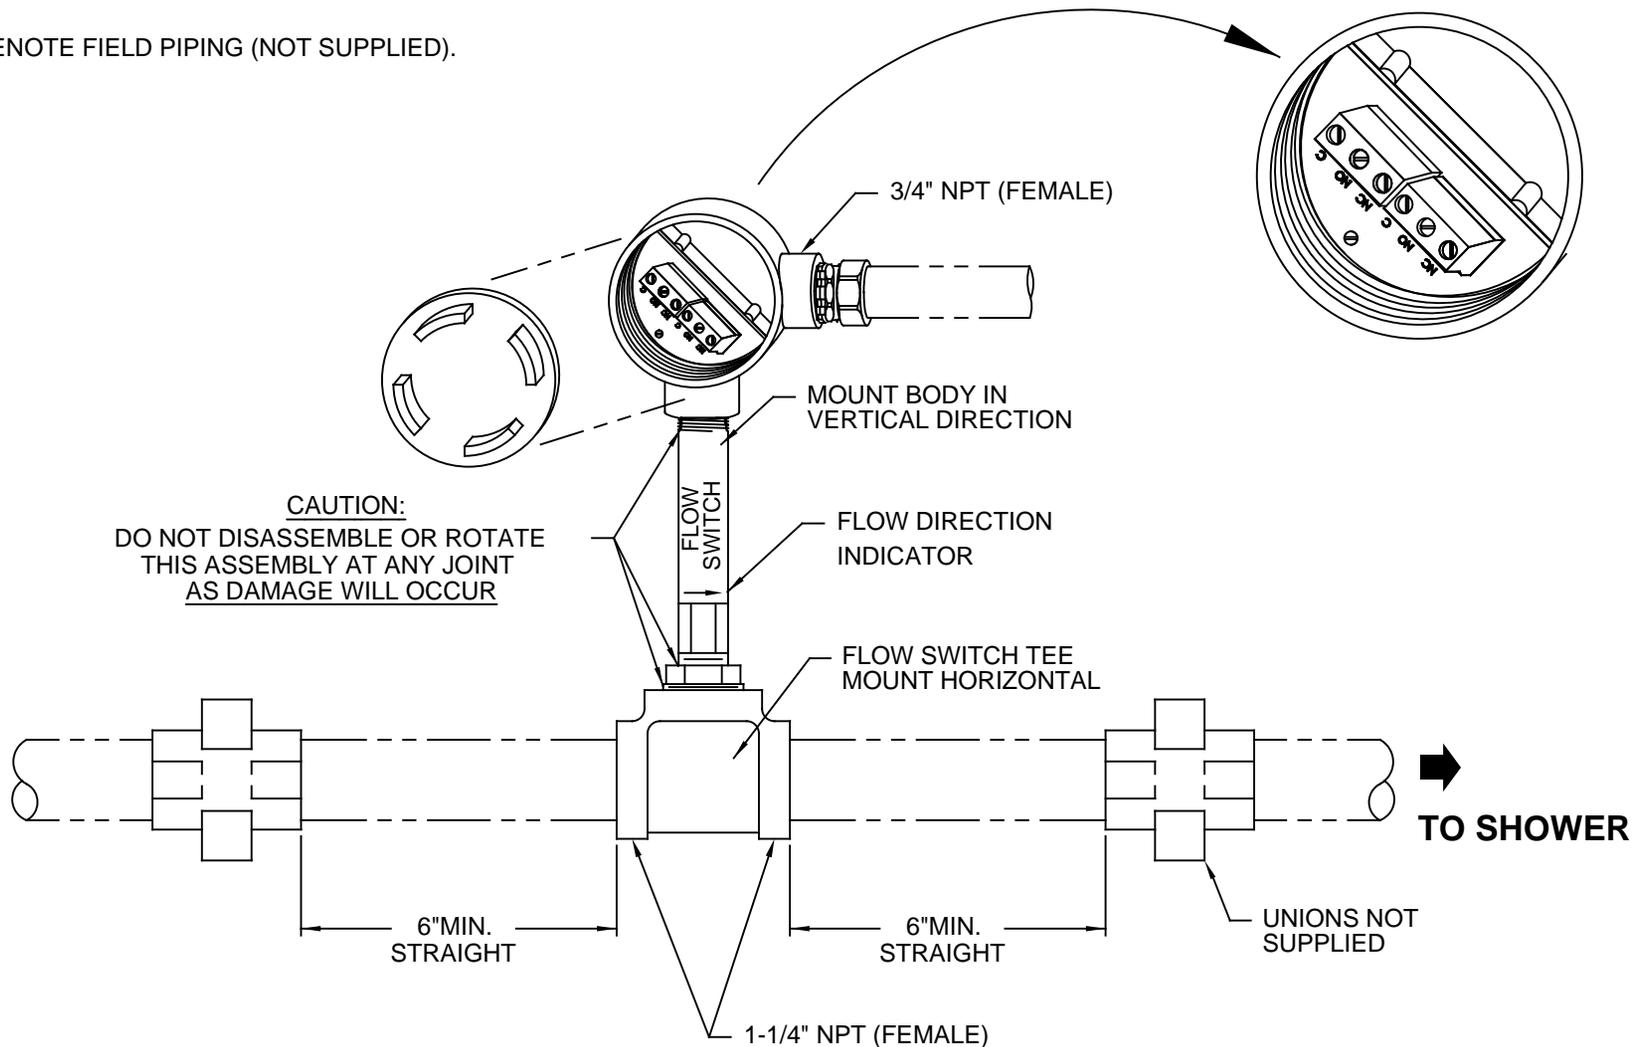

**FIGURE 1**

|  |                |   |                            |
|--|----------------|---|----------------------------|
|  <b>Haws</b> <sup>®</sup> |                | 1455 KLEPPE LANE<br>SPARKS, NEVADA 89431<br>(775) 359-4712 FAX (775) 359-7424<br>E-MAIL: HAWS@HAWSCO.COM<br>WEBSITE: WWW.HAWSCO.COM |                            |
|  |                | ECN NO. REVISED PER BY: ECN: 5198 JP  | MODEL(S)<br>SP154DPDT      |
| DRAWN: D. OLLOM  | DATE: 3/06/97  | CHKD.: CC   | REVISION<br>4              |
| APPROVED: FV   | DATE: 05/26/17 | SCALE: 1:1  | DRAWING TYPE: INSTALLATION |
|  |                | SIZE: A   | SHEET 1 OF 1               |