Ш



Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

DUAL TEMPERATURE REFRIGERATOR/FREEZER

HBRF49HC Glass Door Bottom Mount Reach-In Hydrocarbon Series

MODEL: HBRF49HC-1-A-G



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, side, and grille (galvanized back & bottom)
- Stainless steel interior
- Full electronic control with one-touch defrost
- Dual temp refrigerator/freezer units provide two different operating temperature zones for different types of products
- Left: refrigerator section
- · Right: freezer section
- One-piece grille allows easy removal/installation for preventative maintenance
- Self closing doors, 120° stay open feature with spring-loaded style hinges
- Snap-in magnetic door gaskets for easy cleaning and replacement
- Ten (10) heavy-duty epoxy coated wire shelves
- · LED lighting standard
- 6" Heavy-duty casters with (2) brakes
- Certified for open food product

OPTIONS & ACCESSORIES

- Epoxy shelves
- Door locks
- Shelf clips
- 3" Casters or 6" legs
- Wine temperature control
- Door swing orientation (at time of order)
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerator maintains product temperatures between 36°F to 38°F
- Freezer maintains product temperature to -10°F









3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	HBRF49HC-1-A-G	
EXTERNAL DIMENSIONAL DATA		
Width Overall	52"	
Depth Overall (with handles)	33 %16"	
Height Overall (with casters)	84"	
Number of Doors	2	
Depth with Door Open 90°	56 ½16"	
Door Openings (in)	22 ¹¾16" x 52 ¾16"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	(R) 21.01 (F) 21.01	
Internal Width Overall (in)	(2) 23"	
Internal Depth Overall (in)	27"	
Internal Height Usable (in)	55"	
Number of Shelves	10	
ELECTRICAL DATA		
Full Load Amperes	(R) 2.88 (F) 6.34	
REFRIGERATION DATA		
Horsepower	(R) 1/4 (F) 3/4	
Capacity (BTU/Hr)	(R) 1702 (F) 2097	
Heat Rejection (BTU/Hr)	4848	
Charge (lbs/grams/ounces)	(R) 0.1987 / 90 / 3.18 (F) 0.2094 / 95 / 3.35	
SHIPPING DATA		
Gross Weight - Crated	790 lbs	
Height - Crated	88"	
Width - Crated	53"	
Depth - Crated	35"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Dual Temp Bottom Mount Reach-In Glass Door Refrigerator/Freezer Model: HBRF49HC-1-A-G

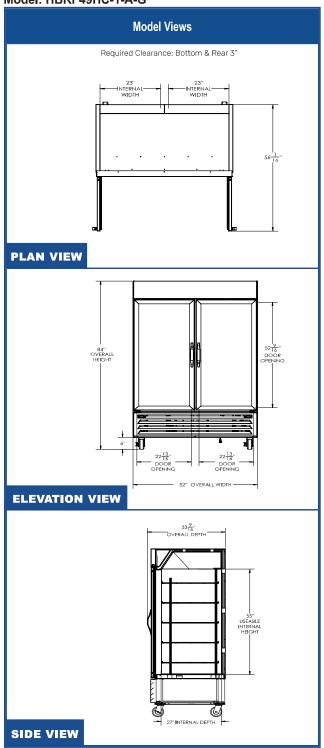







115/60/1 Unit pre-wired at factory (2) NEMA 5-15P and include 8' long cord and plug set.

