



Item # _____

Job _____

METRO® HEATED BANQUET CABINETS

One-Door Versions

Control to serve meals hot and on time, every time.

Efficient: Economic one-door versions are designed to hold up to 11" diameter covered plates and are available in smaller capacities.

Versatile Thermal Performance: Standard Electric and Quad-Heat™ Dual Fuel thermal systems available.

Superior Thermal Stratification: Available Quad-Heat™ Dual Fuel canned fuel system utilizes corner chimneys to provide even thermal stratification, channeling warm air throughout the cabinet, surrounding meals with uniform heat. By utilizing the "dead" space in the corners, Quad-Heat™ maximizes the volume of the cabinet while minimizing the space it requires. Easy-to-access drawers allow canned fuel to be monitored and replaced without opening doors.

Control: Three-Point-Control Handle is designed with the user in mind. Ergonomically designed for pushing and pulling from both the side and the front. Optional Swing-Up Handle provides additional control and visibility when moving the cabinet.

Hands-Free Access: Kick-Latch provides access to the cabinet when hands are full.

Maneuverability: Optional swivel lock caster system allows cabinet to be moved in-and-out-of-line without "dragging". Rigid casters can be made to swivel for movement in tight spaces and automatically switch back to rigid when needed for moving down halls.

Reliability: High-performance 1650 watt heating module is easy to remove, without tools, for scheduled cleaning and service. Side-mounted power cord is easy-to-access and does not obstruct doors.


Intelligence: All important information is found in one easy-to-use, easy-to-read place.

- Time — Exclusive multi-function count-up/count-down timer.
- Temperature — Accurate and easy to read thermometer.
- Contents — Dual function "white-board" and clip-board for labeling.


Energy Star: All Metro Heated Banquet Cabinet models are Energy Star.



MBQ-180-QH — 180 Plate Capacity with Quad-Heat™ Dual Fuel



Standard Electric Thermal System



Quad-Heat™ Dual Fuel Thermal System

Options and Accessories:

- Swing-Up Handle
- Travel Latch
- 8" Casters
- 8" Pneumatic Casters
- Swivel Lock Casters
- 8" Swivel Lock Casters
- Swing-Up Shelf Accessory
- 220 Volt, 50/60 Hz Version
- Covered Plate Carrier
- Open Plate Carrier
- 20 amp Plug



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



Metro® Heated Banquet Cabinets One-Door Versions

13.33




METRO® HEATED BANQUET CABINETS

One-Door Versions

Specifications

- **Construction:** Welded, reinforced, stainless steel "edgeless" construction.
- **Cabinet Materials:** Type 304 stainless steel; 20-gauge polished exterior; 22-gauge interior.
- **Casters:** Heavy-duty, 6" diameter polyurethane casters with 2" tread width. Ball bearing swivel race and roller bearing axle with zerk grease fittings. Plate-mounted and staggered. Two rigid and two swivel with brakes.
- **Bumper:** Non-marking, solid vinyl bumper mounted to 1/8" thick aluminum support channel.
- **Insulation:** Full, 1" thick high-density fiberglass. R Value=4.2.
- **Doors:** Insulated, welded, double-panel Type 304 stainless steel door; 20-gauge polished exterior; 22-gauge interior.
- **Hinges:** Lift-off, double hinged, with long-life nylon bearings.
- **Gaskets:** High temperature, cabinet-mounted, santoprene gaskets.
- **Latches:** High-strength magnetic pull latch and bottom mounted kick latch on door.
- **Handle:** Unique Three-Point-Control Handle. 1" diameter stainless steel construction with integral cord wrap standoffs.
- **Shelves:** Nickel-chrome plated, removable wire shelves. Heavy-duty, non-flattening shelf brackets.
- **Thermometer:** Easy-to-read analog thermometer with remote protected sensing bulb.
- **Timer:** Dual-function count-up and count-down timer.
- **Content Labeling:** Multi-function white-board/clipboard for use with dry-erase marker or any size paper label.
- **Size and Capacity:** One-door models accommodate up to 11" covered plates (diameter of cover) and full-size sheet pans side-to-side on shelves.
- **Electric Heating System:** Bottom, mounted heat module. Dial thermostatic control. High-temperature ball bearing blower motor. 1650 watt, 120 VAC, 13.8 amp, 15 ft., 3-wire lead cord with NEMA 5-15P plug (20 amp for CUL). Removable without tools.
- **Canned Heat Fuel System — Quad-Heat™ Dual Fuel:** Bottom-mounted drawers with heat conduction baffles in combination with corner chimneys. Anti-tip drawers hold cans securely. Vented for proper combustion.
- **Thermal Performance:** Electric pre-heat to 170° F (76° C), actual internal temperature, in approximately 30 minutes (based on 120 capacity size).

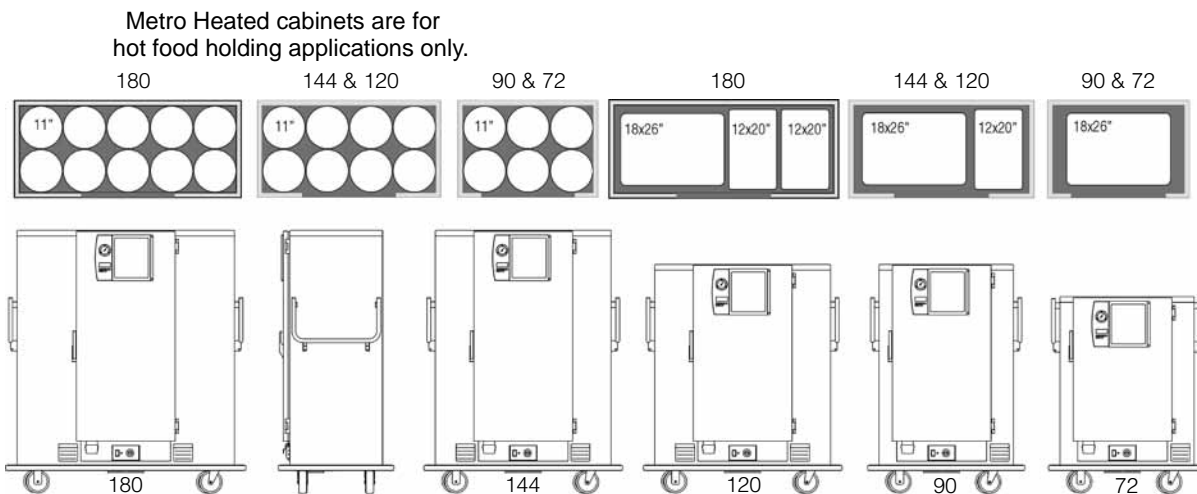

Cat. No.	Thermal System	Plate Capacity			Covered Plates Stacked High	Shelf Size (in.)	Shelves	Shelf Clearance (in.)	Height (in.)	Depth (in.)	Width (in.)	Shipping Weight (lbs.)
		Stacked	Covered Carrier	Open Carrier								
MBQ-180	Standard	180	180	150	6	55x22	3	17	69.5	30.625	63.625	521
MBQ-180-QH	Quad-Heat	180	180	150	6	55x22	3	17	69.5	30.625	63.625	556
MBQ-144	Standard	144	144	120	6	44x22	3	17	69.5	30.625	52.625	421
MBQ-144-QH	Quad-Heat	144	144	120	6	44x22	3	17	69.5	30.625	52.625	456
MBQ-120	Standard	120	120	96	5	44x22	3	14	60.5	30.625	52.625	408
MBQ-120-QH	Quad-Heat	120	120	96	5	44x22	3	14	60.5	30.625	52.625	443
MBQ-90	Standard	90	90	72	5	33x22	3	14	60.5	30.625	41.625	327
MBQ-90-QH	Quad-Heat	90	90	72	5	33x22	3	14	60.5	30.625	41.625	362
MBQ-72	Standard	72	72	60	6	33x22	2	17	52.0	30.625	41.625	302
MBQ-72-QH	Quad-Heat	72	72	60	6	33x22	2	17	52.0	30.625	41.625	337

NOTE: Capacities based on a maximum plate and cover height of 2 3/4".

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
 North Washington Street, Wilkes-Barre, PA 18705
 Phone: 570-825-2741 • Fax: 570-825-2852
 For Product Information Call: 1-800-433-2232

L03-247
 Printed in U.S.A. Rev. 3/09
 Information and specifications are subject to change without notice. Please confirm at time of order.
 Copyright © 2003 InterMetro Industries Corp.