

High Environment Refrigerated Self-Service Case 40°F Product In Environments Up To 85°F/60% RH



MODEL SHOWN: HECO47R

Conforms to NSF STD 7
TYPE II

- ☐ HECO37R
- ☐ HECO47R
- ☐ HECO57R
- ☐ HECO67R

Lengths include end panels

- 36-1/4"L x 33-1/4"D x 82-1/8"H
- 47-1/4"L x 33-1/4"D x 82-1/8"H
- 59-1/4"L x 33-1/4"D x 82-1/8"H
- 71-1/4"L x 33-1/4"D x 82-1/8"H

STANDARD FEATURES

- Breeze~E (Type-II) w/ EnergyWise s/c refrigeration
- 4"D removable rear wall spacer (not included in depth dimension)
- Compressor air front intake, rear discharge. Front panel cannot be blocked. Must remain 4" from wall
- Condensate pan (self-contained refrig. only)
- E-Coated evaporator coil
- Environmental door system w/ Roll-down security cover, locking
- Integrated average product temperature of 40°F or less
- LED 3500K top light(s)
- One piece formed ABS plastic tub
- One year parts & labor; 5 year compressor warranty
- Removable deck pans provide complete access to evaporator coil & refrigeration connections
- Shelving removable and adjustable on 1" centers

Features	Standard	Options
EXTERIOR COLOR	☐ Laminated (non-premium) Confirm pattern/grain direction	☐ Laminated (premium) Confirm pattern/grain direction ☐ Stainless steel (includes lower front panel)
INTERIOR COLOR	☐ Black	☐ Stainless steel
LWR PERFORATED FRNT PANEL	☐ Painted - Black	☐ Stainless steel (w/stainless ext. only)
BASE	☐ Casters w/ levelers	☐ Levelers (only) ☐ Seismic levelers (Q4695)
END PANEL LEFT	☐ Full end panel w/mirror interior	☐ Cutaway end panel
END PANEL RIGHT	☐ Full end panel w/mirror interior	☐ Cutaway end panel
EXTERIOR BACK PANEL	☐ Solid back panel, black	☐ Rear loading hinged doors, locking ☐ Solid back panel, stainless steel
SHELVING	☐ Metal shelves, non-lighted	☐ Metal shelves, lighted (LED 3500K)
ELECTRICAL CONNECT	☐ 6' Straight blade power cord (base exit)	☐ 6' Locking blade power cord (base exit) ☐ 6' Locking blade power cord (top exit) ☐ 6' Straight blade power cord (top exit)
REFRIGERATION	☐ Breeze~E (Type-II) w/ EnergyWise s/c refrigeration	
MISCELLANEOUS		☐ Case height wall spacer bracket (specify BL or SS) ☐ Second year parts & labor warranty (excludes compressor)
ACCESSORIES		☐ Clean Sweep® coil cleaner (n/a w/remote) ☐ Price tag molding (matches interior color)


Option Notes: 1 - HECO37R - Specify service LH or RH hinge

Oasis®


Product Specifications

Intended Environment: Type II - Designed to operate in ambient conditions of 80°F and 60% relative humidity unless noted otherwise in system information below.		
Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Packaged refrigerated products	40

PLAN VIEW

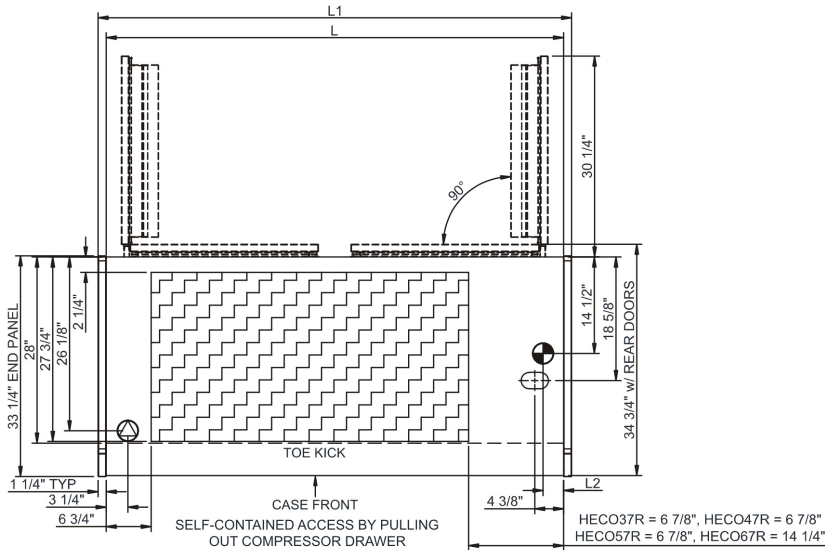

SIDE VIEW

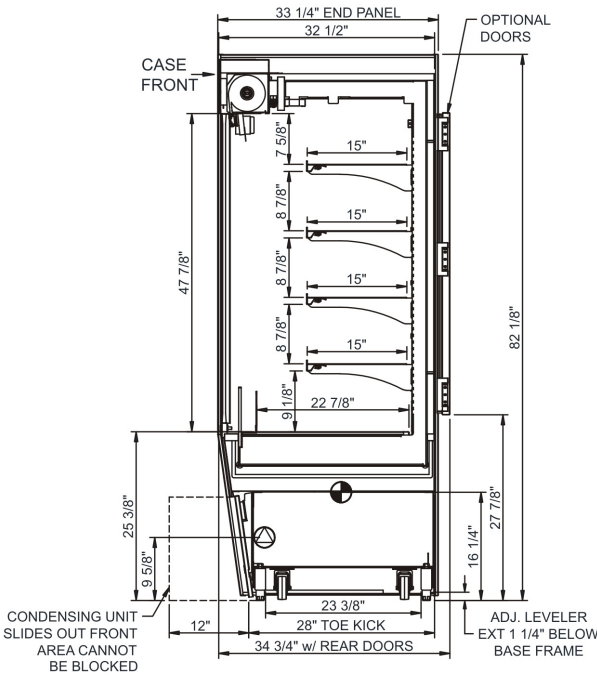

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6\"/>

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications															
Model	L"	L1"	L2"		System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH
HECO37R	N/A	36.25	3.13	Self-Contained	Circuit #1	110-120	1	60	16.00	1,616	2+G	5-20P or L5-20P	N/A	N/A	N/A
HECO47R	N/A	47.25	3.13	Self-Contained	Circuit #1	208-240	1	60	10.80	2,025	2+G	6-20P or L6-20P	N/A	N/A	N/A
HECO57R	N/A	59.25	3.13	Self-Contained	Circuit #1	208-240	1	60	15.31	2,796	2+G	6-20P or L6-20P	N/A	N/A	N/A
HECO67R	N/A	71.25	3.13	Self-Contained	Circuit #1	208-240	1	60	15.65	2,812	2+G	6-20P or L6-20P	N/A	N/A	N/A

*** Does not include electric defrost on freezer models.

Regulatory Approvals:	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF 7



In Accordance with
AHRI Std 1200

DOE 2017
Energy Efficiency
Compliant

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 3) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- 4) End panels must be tightly joined or kept at least 6" away from any structure to prevent condensation.
- 5) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
- 6) Keep at least 8" of clearance above unit for air discharge (self-contained only).
- 7) Tile floors, low ceilings, or small rooms will increase noise level. Remote refrigeration recommended.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.