
SURFACE GUARDS





WARNING AND PROTECTIVE BUMPER GUARDS

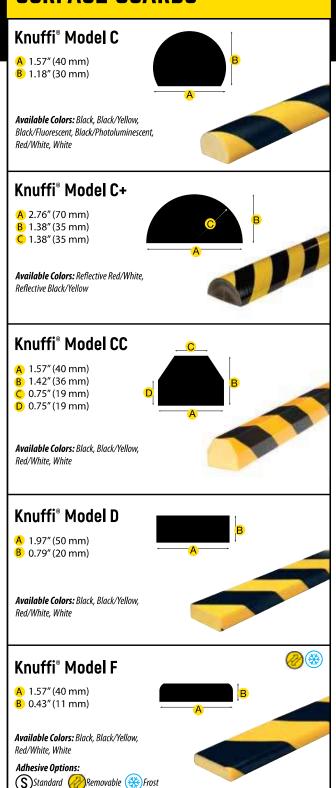

TECHNICAL DATA

Profile Body: Polyurethane foam.

Surface: Polyurethane foam colored by reverse printing and foamed in place so no paint appears on the outside.

Adhesive: All models except Magnetic and Wall Protection Kits are installed using light and ageing resistant, modified acrylic glue.

Adhesion: 21N/inch (25mm)

Temperature Range: -40°F to +212°F (-40°C to 100°C)

Fire Classification: DIN EN 13501-1 / Class E.

Colors:



Lengths: Most Black/Yellow adhesive-fastened models are available in 3' 3-1/4" (1m), 16' 4-3/4" (5m) and up to 164' 0" (50m) lengths. Other colors and installation styles may not be available in all sizes. Please consult Ideal Warehouse Innovations Inc. for more details.

5-year warranty for elasticity and color-fastness. Knuffi® must be fastened according to the installation recommendations. Exclusions include adhesive power and UV resistance.

Corner, pipe and edge guards are also available.



Knuffi® Model S

A 2.95" (75 mm)

B 0.79" (20 mm)


Available Colours: Black/Yellow

SURFACE GUARDS

KNUFFI® MAGNETIC


This smart solution makes temporary installation a breeze! Easily put them on and take them off any dangerous metal surface and let the heavy magnet do the work.





WALL PROTECTION KIT

A complete assembly of a Knuffi® protective bumper guard, factoryfitted to a stainless steel backing. Perfect for uneven surfaces and where adhesives won't work well. Can be anchored into virtually any surface.




Flat Kits

- A 2.95" (75 mm)
- B 2.56" (65 mm)
- C 3.94" (100 mm) D 1.08" (27.5 mm)
- E Ø 0.24" (6 mm)

Available Lengths:

19-3/8" (1/2m) or 3' 3-1/4"(1m)

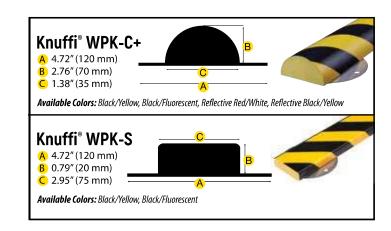

Adhesive Options:



Knuffi® Frost – Install in as low as 14°F (-10°C)

