



Model: 16-197 Item #: _____ Date: _____
 Project: _____ Qty: _____ Approved By: _____

4" Center Deck Mount Electronic Sensor Faucet with Cast Spout

Royal Series Plumbing



Model	Description
16-197	Royal Series 4" Center Deck Mount Electronic Sensor Faucet with Cast Spout

Standard Features


- Includes electronic sensor faucet, control module, mechanical mixing valve and water supply hoses
- Infrared sensor operated with low battery indicator light
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Built-in filter to prevent debris from entering solenoid valve
- Warranty: 3 years

Specifications

Water Inlet	1/4" Male NPS
Mounting Style	Deck Mount
Centers	4" Center
Temp Range	40°F - 180°F
Water Pressure	20 - 120 PSI
Sensor Type	Infrared
Flow Rate	0.5 GPM
Default Time Out	30 sec.
Default GPC	1.10
Default Shut-Off Delay	1 sec.
Default Auto Flush	Off
Sensor Range	3/4" - 8-1/4"
Battery Life	500,000 cycles
Material	Solid Brass
Finish	Polished Chrome
Weight	9 lbs.

Product Compliance

- ASME A112.18.1-2011/CSA B125.1-11
- NSF-61
- NSF/ANSI 372
- Meets ANSI A117.1 (ADA)
- CEC Listed
- Massachusetts Approved

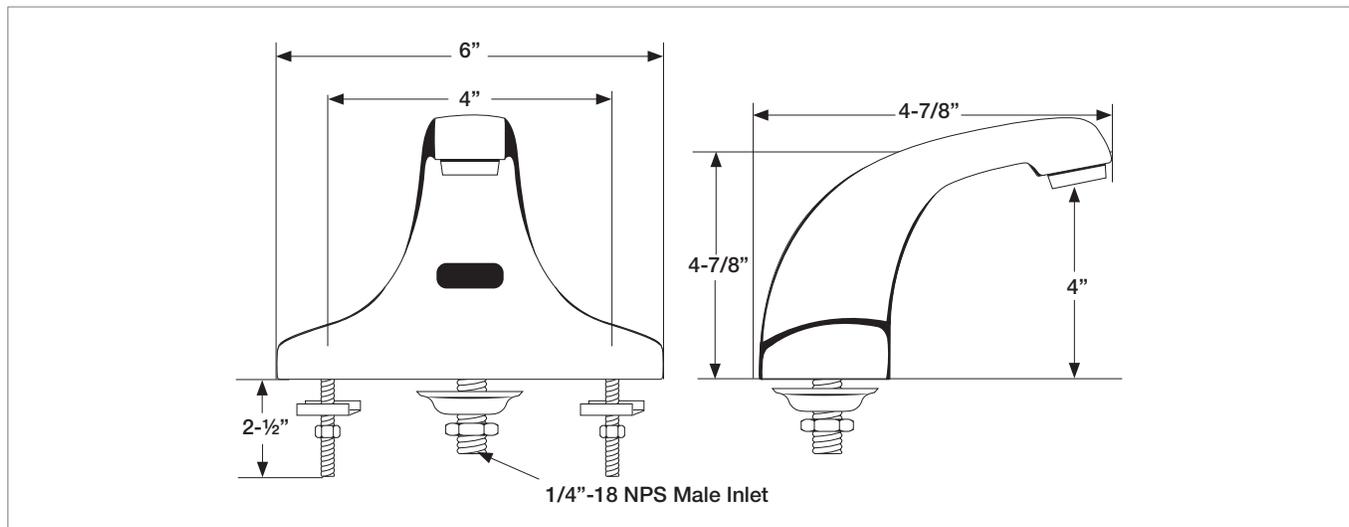


WARNING:
 Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes.

California Prop 65 Warning:
 This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



Model: **16-197** Item #: _____ Date: _____
 Project: _____ Qty: _____ Approved By: _____

4" Center Deck Mount Electronic Sensor Faucet with Cast Spout **Royal Series Plumbing**

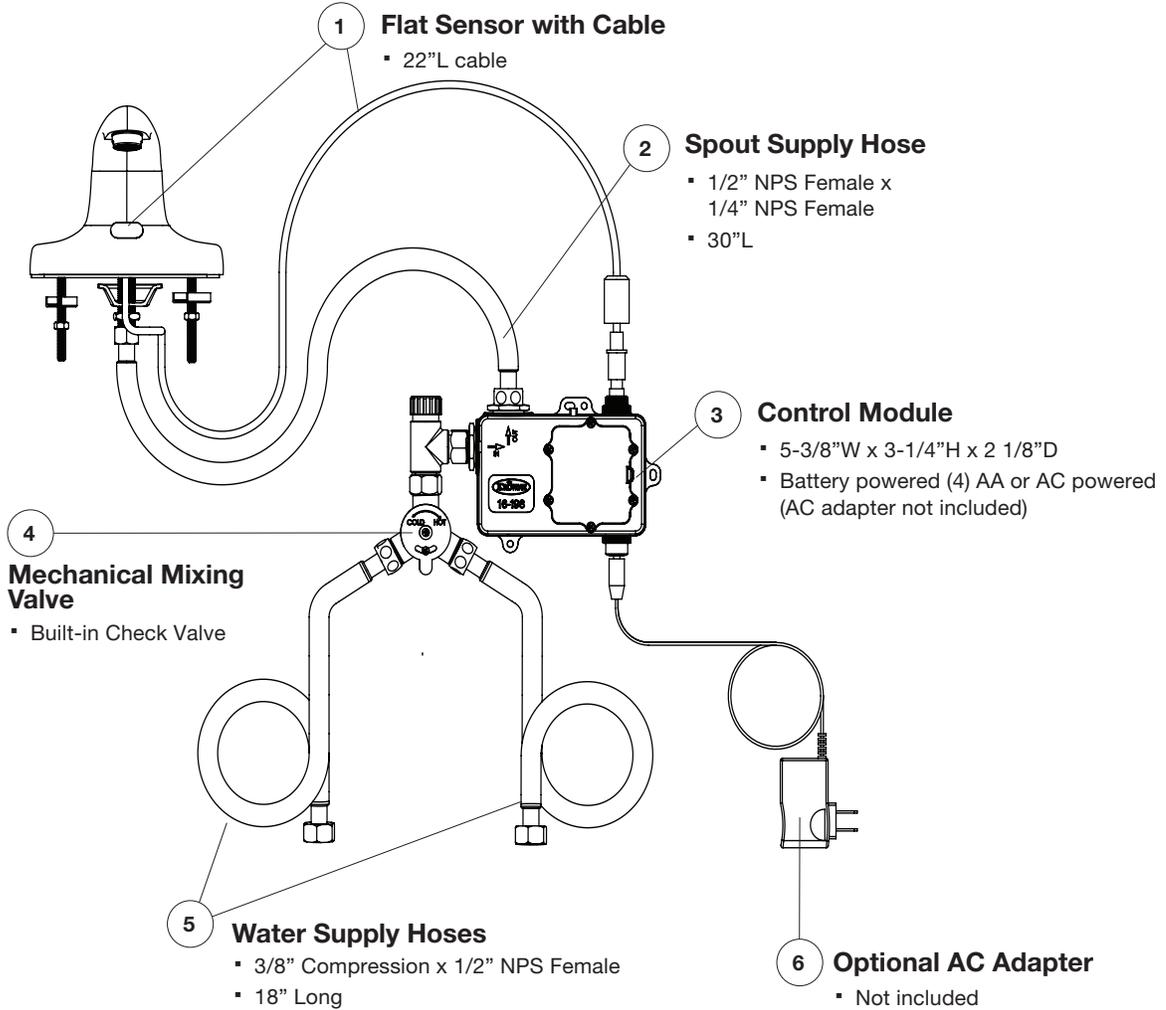

Replacement Parts

No.	Model	Description
1	16-505	Flat Sensor with Cable
2	16-511	Spout Supply Hose
3	16-198	Control Module
4	16-402L	Mechanical Mixing Valve
5	16-510	Water Supply Hoses
6	16-199	Optional AC Adapter

Control Settings

Default Flow Control Setting Highlighted in Gray

Flow Control	Setting							
Shut-Off Delay	1s	10s	15s					
Auto Flush	ON			OFF				
Auto Time Out	15s	20s	25s	30s	45s	1m	2m	10m