

KStrong® Kapture™ Element Arc Flash Rated 5-Point Full Body Harness, 3 D-rings, Mating Buckle Legs and Chest (ANSI)

KStrong® Kapture™ Element Arc Flash Rated 5-Point Adjust Full Body Harness with One (1) Back D-Ring, Two (2) Side D-Rings, and Mating Buckle Leg and Chest Closures (ANSI)

DESIGN

- 5-Point adjustable full body harness made with FR webbing.
- Shoulder straps with Dielectric friction buckles for easy adjustment
- Chest straps & leg straps with Dielectric pass thru buckles for easy adjustment
- One back Dielectric D-Rings for fall arrest
- Two Dielectric D-Rings at the waist level for work positioning

WEBBING

Material: Aramid

Width: 1.73 in. \pm 0.04 in. (44mm \pm 1mm)

Breaking Strength: 5000 lbs.

STITCHING THREAD

Material: Kevlar

METAL COMPONENT

Material: Alloy Steel core with reinforced Polymer.


Finish : Black Moulded

CAPACITY RANGE

ANSI: 130 - 310 lbs.; OSHA: 420 lbs.

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.11-2021, ASTM F887-20

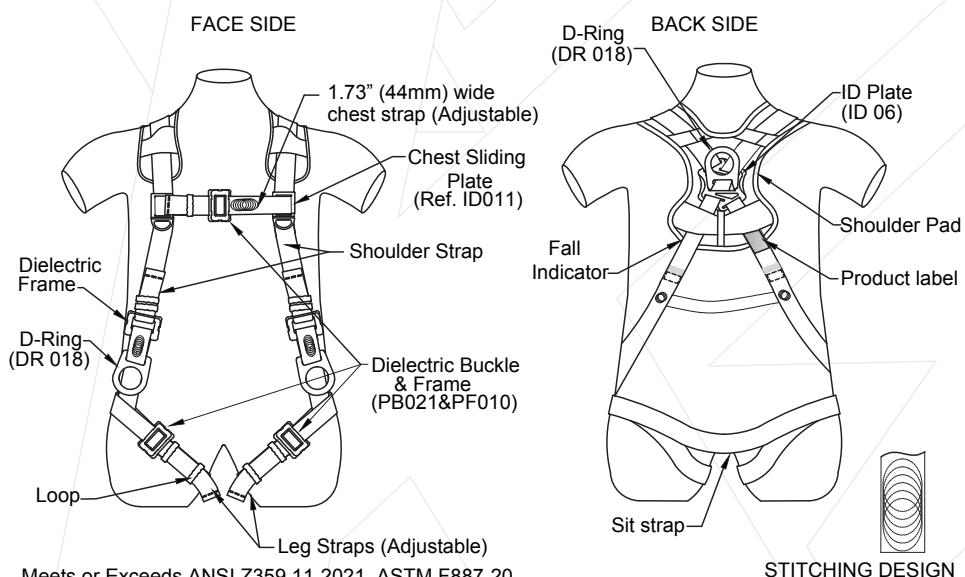

Meets or Exceeds ANSI Z359.11-2021, ASTM F887-20