

KStrong® BRUTE™ Dual 8 ft. Tie-Back SRL Assembly with Connectors and Hi-Abrasion Resistant Webbing. Includes installation carabiner (ANSI).

Model: UFS359506D

BRUTE™

SRL SERIES

KStrong® BRUTE™ Dual 8 ft. Tie-Back SRL Assembly with Connectors and Hi-Abrasion Resistant Webbing. Includes one (1) installation carabiner (ANSI).

DESIGN

- Robust & durable plastic casing.
- Dyneema webbing.
- Twin SRL connector (UFC409151) at top and Tie back hook (Our ref. PN 148SG) at bottom end.

LENGTH

Max 6 ft.

WEBBING


Material: Dyneema Webbing 1 in. (25.4mm)
Minimum Breaking strength: 4500 lbs. (2041 kg)

WEIGHT

5.63 lbs. ± 0.22 lbs. (2554 gm ± 100 gm)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.14-2014 CLASS B

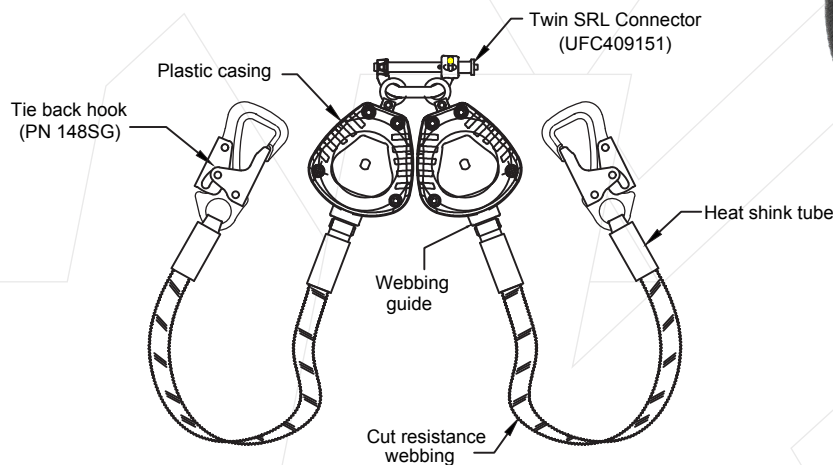

Meets or Exceeds ANSI Z359.14-2014 Class B