

Ergo-One® System Utility Carts

Medium Duty Stainless Steel Ergonomic Carts

500 Lb. Capacity



Model 6820

Reduce Injuries Caused By Improper Pushing, Lifting and Loading

- Both stainless steel shelves are in the “safe zone” for repetitive loading and unloading.
- Durable, easy-to-clean and sanitize stainless steel.
- Fully welded construction for added durability.
- Protective leg bumpers and comfortable handle grips are available in seven colors for color coding or coordinating.
- 500 lb. (230 kg.) capacity is ideal for constant use over standard floor surfaces.



Lakeside Manufacturing, Inc.


4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com

Ergo-One® System Utility Carts

Medium Duty Stainless Steel Ergonomic Carts

500 Lb. Capacity

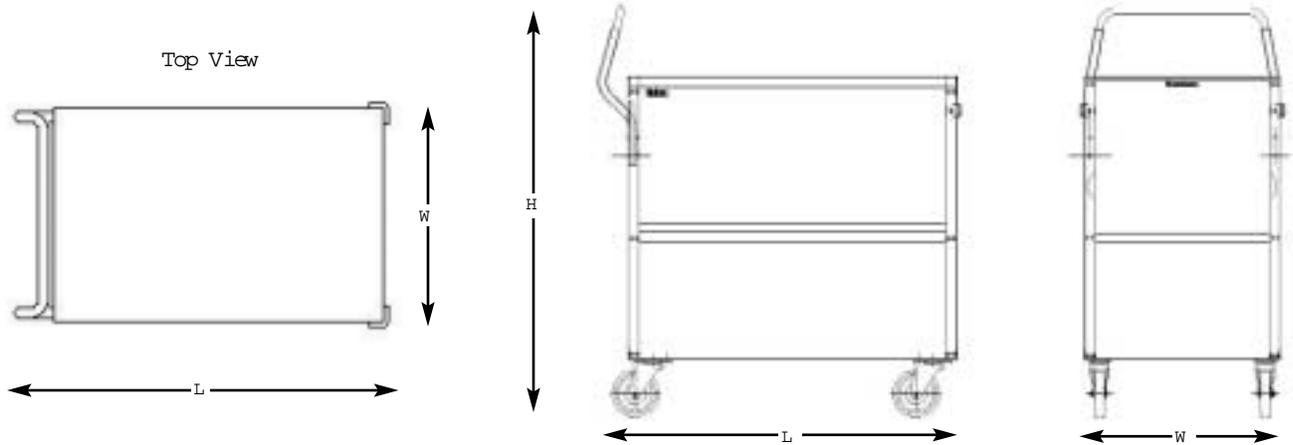

Dimensions

AutoCAD drawings available through KCL CADalog

Model	Shelf Description			Top Shelf Height*	Overall Size			Lake-Glide® Casters		Case Weight	
	# of	Size	Clearance		W	L	H**	Type	Dia.	lb.	(kg.)
6800	2	15-1/2" x 24" (394 x 610)	14-1/8" (359)	35-1/4" (895)	16-1/2" (419)	28" (711)	44-3/8" (1127)	All swivel polurethane	5" (127)	32	(14.5)
6810	2	18" x 27" (457 x 686)	14-1/8" (359)	35-1/4" (895)	19" (483)	31-1/8" (791)	44-3/8" (1127)	All swivel polurethane	5" (127)	35	(15.9)
6820	2	21" x 35" (533 x 889)	14-1/2" (368)	35-3/4" (908)	22" (559)	39-1/8" (994)	44-3/8" (1127)	All swivel polurethane	5" (127)	61	(27.6)
6830	2	21" x 49" (533 x 610)	14-1/2" (368)	35-3/4" (908)	22" (559)	53-1/8" (1400)	44-3/8" (1127)	2-swivel, 2-fixed polurethane	5" (127)	88	(39.9)

Measurements in () denote metric millimeters, unless otherwise specified.

*Measured from floor.

**Includes height of ergonomic handles. Handle assembly required.

Specifications

Unit shall be of fully welded unitized construction with an overall carrying capacity of 500 lb. (230 kg). Corner legs shall be of 16-gauge angle stainless steel. Shelves shall be of 20-gauge stainless steel with long shelf edges double hemmed for extra strength and shall be electronically spot welded to upright legs at all points. Bottom shelf shall be positioned no closer than 20" (508 mm) from the floor surface, and top shelf shall be positioned no higher than 36" (914 mm) from the floor surface. Push handles shall be of ergonomic vertical design and shall feature 8" (203 mm) range grip height. Unit shall have corner bumpers mounted to front legs. Four each 5" (127 mm) swivel casters with non-marking polyurethane wheels shall be mounted to cross members of 18-gauge stainless steel.

Models 6820 and 6830 only:

Top shelf shall have 16-gauge angle reinforcements welded to long shelf edges.

Optional Accessories

- Set of two each brake casters
- Cushion tread wheels
- Clear vinyl slipover box type cover
- Color coded bumpers and handlegrips.



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com