

# LightFry<sup>®</sup>

## MODEL 12-U-4 Food Service Air Fryer

LightFry air fryer offers the quality your customer can see to improve profits and health for a quick return on investment. LightFry delivers safe and efficient cooking.



### Standard Features

- Programmable touch screen control
- Customizable temperature control
- Customizable basket rotation
- Full stainless steel enclosure
- Up to 30 programmable menu items
- USB port for easy recipe uploading
- Self cleaning wash system with built in sanitizing cycle
- Rapid cool down function
- 1 Year parts and labor

### Weight and Size

- 225 lb. unpacked
- 3 ft x 3 ft x 3 ft
- Shipping weight, 260 lb. on pallet

### Standard Safety Features

- Reduced risk of deep fat frying related injury to operator
- Password protection for programming
- No pilot lighting

### Standard Cleaning & Care Features

- Cool down cycle ensures unit is safe to handle
- 1 hour, 2 hour and 4 hour labor-less cleaning cycles
- One way fit of internal basket and cage

### Accessories

- Stainless steel equipment stand
- Stainless steel freezer base
- Ventless exhaust hood

### Capacity

- 5 lb. of French fries 7-9 Min.
- 5 lb. of chicken wings 9-11 Min.
- 5 lb. of vegetables 7-9 Min.



### CONTACT US

Revised: May 15, 2020

### LIGHTFRY USA

1801 NORTH ELDER STREET | NAMPA IDAHO 83687 USA


Visit: [www.LightFryUSA.com](http://www.LightFryUSA.com) | Email: [Support@LightFryUSA.com](mailto:Support@LightFryUSA.com) | Ph: (208) 467 - 7441



# LightFry<sup>®</sup>

## MODEL 12-U Food Service Air Fryer

### DIMENSIONS

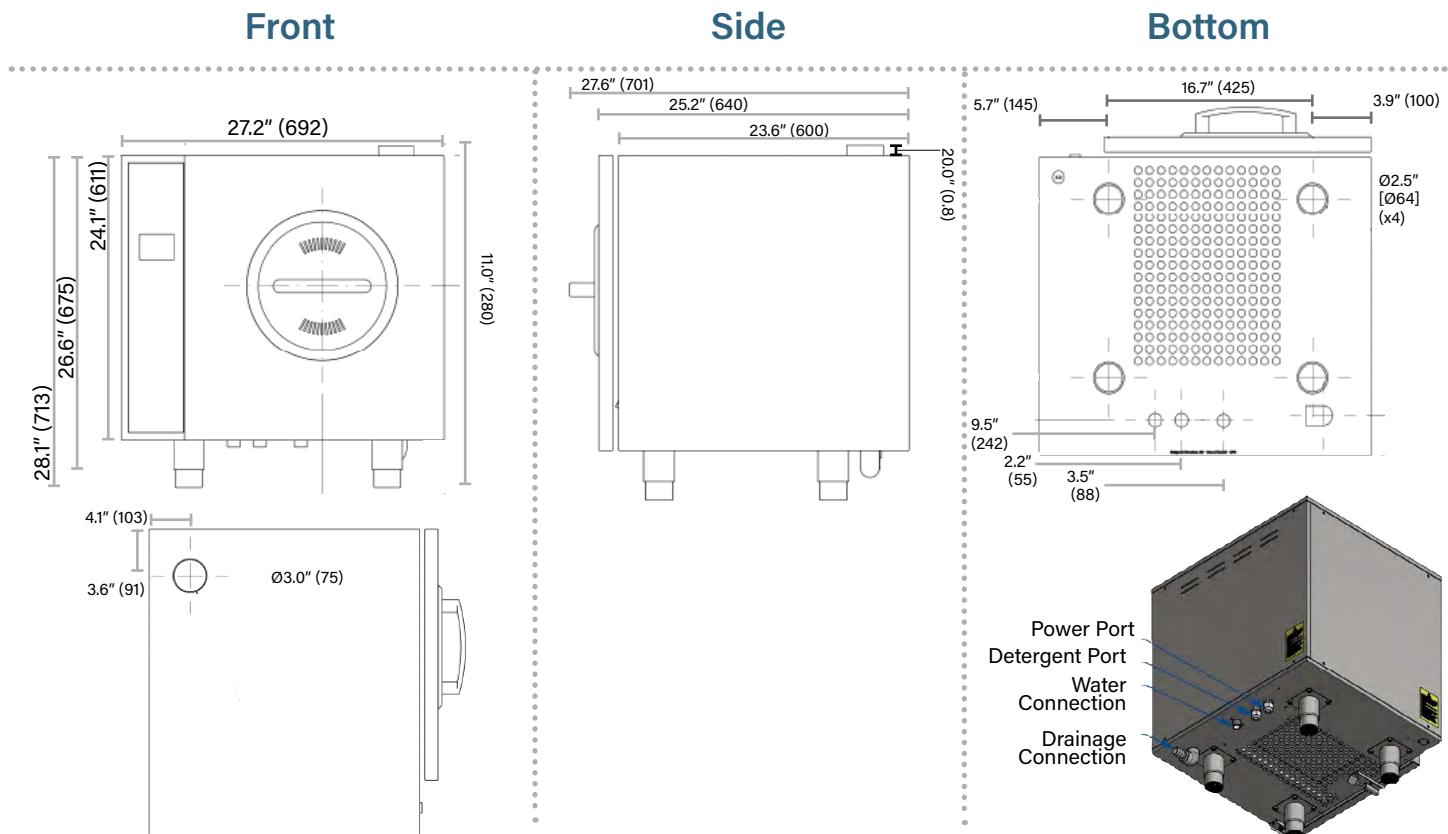

Clearance	Left	Right	Rear	Exhaust	Drain	To Machine	To Drain	Pump	Type	Detergent
	Min 2" 12" from heat source	Min 2"	Min 2"	Min 4" from exhaust		1" PVC hose to unit secured with hose clamp	1" ID PVC hose with air gap at floor drain		SEKO Ware Basic	EcoLab Ultra Kleen <sup>®</sup>

Plumbing	Water Type	Supply Connection	Machine Connection	Pressure	Temp	Exhaust	Hood	Ventless
	Cold water	Eastman 3/8" ID braided SS Hose supply with 90° elbow, shut-off valve and back-flow preventer	3/4" standard connection	58-87 PSI	176 °F		Type 2 Hood	Available as accessory

Electrical	Power Configuration	Phase	Amp	Breaker	Kw	Wire	Cord	Plug Part #	Receptical Part #
	208 / 240V 4 wire	3 Ph 60 Hz	50 AMP 33 running	50 amp	13 Kw	4 wire	8ft cord set 8 guage	Trade # CS8365	Trade # CS8364

### CONTACT US

LIGHTFRY USA | 1801 NORTH ELDER STREET | NAMPA IDAHO 83687 USA

Revised: May 15, 2020

Visit: [www.LightFryUSA.com](http://www.LightFryUSA.com) | Email: [Support@LightFryUSA.com](mailto:Support@LightFryUSA.com) | Ph: (208) 467 - 7441

