



MANTEGNA 350 VCS TOP - 14"

Straight-feed slicer, for fresh meat and bolas



Mantegna 350 VCS TOP

- 14" high-quality, heavy-duty straight-feed fresh meat slicers
- Specially designed double-feed carriage to support fresh meat
- Great for meat depts, butcheries and carnicerías. Perfect for bola (bistecs, arranchera and milanesa)
- The inner blade cover ensure a perfectly aligned cut. No waste when cutting same product at different times.
- The TOP version provides even higher durability in terms of reduced maintenance costs with:
 - all knobs, handles, dials and feet in aluminum
 - a fully sealed and waterproof IP 67 switch, with stainless steel ON/OFF buttons
 - no volt release prevents inadvertent reactivation after a power outage
 - complete stainless steel drive shaft assembly

Features

Technical

- The special hopper allows you to slice raw meat (bolas).
- The sharpener assembly is made entirely from aluminum, no plastic that may break with heavy use.
- The tie rod assembly and all screws are made of stainless steel for longer life.
- The slide shaft is made of ground, chromed steel for a smoother operation.
- The high-quality bushings and ball bearings are self-lubricating.
- The dial thickness control cam system allows for an always precise cut.

Safety

- A safety cover is placed under the motor and the electrical components.
- The hopper features an exclusive heavy duty plastic protection to keep operator's hand at a safe distance from the blade while operating slicer.

Sanitary

- Easy to clean aluminum alloy construction does not crack or stain.
- The screws are stainless steel and resist wear and oxidation.
- The carriage and the center plate are quickly removable without tools.

Specifications

Operation:	Straight Feed.
Construction:	Polished, anodized aluminum alloy.
Knife 350:	14" (350 mm), one piece, chromium plated 100Cr6 forged carbon steel blade.
Sharpener:	Built-in, removable, two stone dual action.
Slice thickness:	Infinitely variable up to 1 ^{3/16"}
Motor:	0.5 Hp (410 W), belt driven, fan cooled.
Electrical:	120V AC, 60Hz, 3.10 Amp. (220V, 50Hz available on request).
Plug and Cord:	Attached, flexible, 3 wire SJT AWG 16, 6'4" long, NEMA 5-15P.
Controls:	ON/OFF stainless steel keypad, IP 67 waterproof protection. No voltage release.



Certified to UL Standard 763
 Certified to CSA Standard C22.2






All knobs, handles, dials and feet in aluminum



Double-feed carriage specially designed for fresh meat
 Removable product pusher



Increased gap between blade and machine body

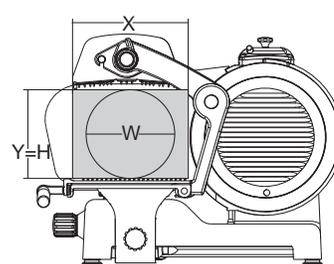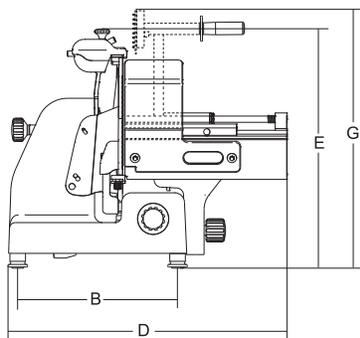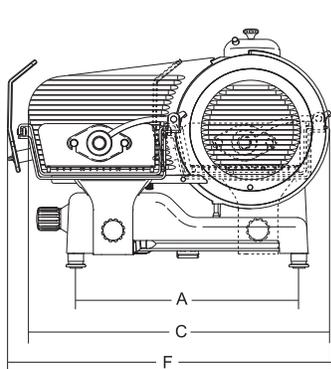

	Ø Blade	Motor	Cut thickness	Blade rpm	Carriage stroke	Hopper	A	B	C	D	E	F	G	X	Y	H	W	Net weight	Shipping	Gross weight
	mm/inch	watt/Hp	inch.	rpm	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	lbs.	inch.	lbs.
Mantegna 350 VCS TOP	350/14"	410-0.55	1 ³ / ₁₆ "	216	12 ³ / ₁₆ "	13 ³ / ₈ " x 9 ³ / ₁₆ "	18 ⁷ / ₁₆ "	13 ⁵ / ₁₆ "	26"	26 ¹⁵ / ₁₆ "	20 ⁷ / ₈ "	28 ³ / ₈ "	22 ¹ / ₁₆ "	10"	9 ⁵ / ₈ "	9 ⁵ / ₈ "	9 ⁵ / ₈ "	84	33" x 34" x 33"	142

