

TO THE STATE OF TH	BEVERAGE-AIR.	Project: Item: Location:
ERAGE. A		Location:
		Approved:

# MARKETMAX DUAL TEMPERATURE REFRIGERATOR/FREEZER

MMRF72HC Black Hinged Triple Glass Door

Hydrocarbon Series



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Exterior features durable black painted steel
- · Heavy duty interior construction includes white coated steel walls
- Brightly lit sign panel
- LED lighting
- Modern one-piece grille
- · Full electronic control with digital display
- Dual-temp refrigerator/freezer units provide two different operating temperature zones for different types of products
- Self-contained bottom mount refrigeration system
- Left: refrigerator single section has double pane lowE glass door
- Right: freezer double section has triple pane lowE glass doors
- Self-closing doors with 120° stay-open feature
- Snap-in gaskets, easy to remove for cleaning or replacement
- Fifteen (15) heavy-duty epoxy coated wire shelves
- Four (4) shelf clips included per shelf
- · Leveling feet standard

### **OPTIONS & ACCESSORIES**

- · White or stainless steel exterior
- · Black or stainless steel interior
- · Shelves black or white
- · Stainless steel clips
- Flow track
- Gravity-Flo track
- Price tag molding
- 3" or 6" Casters
- 6" Legs or seismic/flanged legs
- Door locks (swing doors only)
- Custom signage & decals
- Remote option\* (see note on back page)

### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Freezer maintains product temperature to -10°F
- Refrigerator maintains product temperatures between 36°F to












MODEL	MMRF72HC-1-B-BW		
EXTERNAL DIMENSIONAL DATA			
Width Overall	75"		
Depth Overall (with handle)	33 ½"		
Height Overall	78 ½"		
Number of Doors	3		
Depth with Door Open 90°	55 1⁄8"		
Door Openings (in)	21 %" x 52 ¾"		
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft.)	(R) 19.62 (F) 44.85		
Internal Width Overall (in)	(R) 22" (F) 47"		
Internal Depth Overall (in)	28 ½"		
Internal Height Usable (in)	55"		
Number of Shelves	15		
ELECTRICAL DATA			
Full Load Amperes	(R) 2.88 (F) 10.0		
REFRIGERATION DATA			
Horsepower	(R) 1/4 (F) 3/4		
Capacity (BTU/Hr)	(R) 1702 (F) 2772		
Heat Rejection (BTU/Hr)	6711		
Charge (lbs/grams/ounces)	(R) .1985 / 90 / 3.18 (F) .2094 / 95 / 3.35		
SHIPPING DATA			
Gross Weight - Crated	842 lbs		
Height - Crated	85"		
Width - Crated	77"		
Depth - Crated	36"		

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

# **Dual-Temp Glass Door Merchandisers**

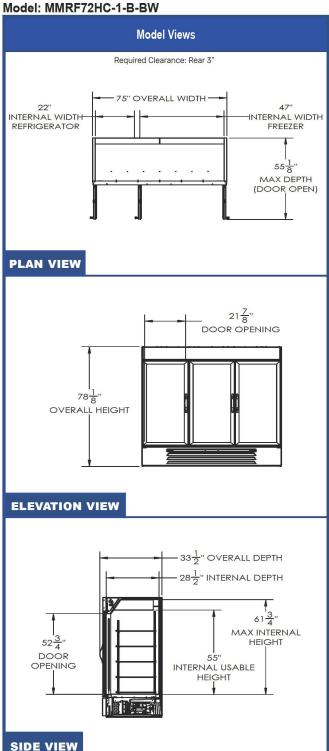





115/60/1 (2) NEMA 5-15P

Unit pre-wired at factory and include 8' long cord and plug set.



