

## Load-Master™ Motorized Utility Cart

Model 163422

### Ideal For Hauling Heavy Loads Over Long Distances And Up And Down Inclines

#### Benefits

- Transport more supplies and equipment with less staff
- Easily maneuver up to 1000 lbs with a single operator
- Labor savings and efficiency – one person and one cart can move more
- Worker safety – reduces operator fatigue and strain

#### Features

- Motorized assisted cart has a self-contained electric motor transaxle
- Simple handle controls with two speed options
- Forward and reverse controls allow operator to push or pull cart
- Emergency stop feature to ensure operator safety and prevent injuries
- Power cord holder for easy access to charge and neat tuck-away while in use
- Engagement override lever allows for non-motorized use
- Quick charge battery system
- All-welded stainless steel heavy-duty construction is easy to clean and sanitize

#### Wheels/Casters

- Non-marking flat-free drive wheels, 2 ea. 8" swivel casters with brake



Model 163422



Battery Carriage



Transaxle Drive Motor



Motion Control



All-Welded Construction

Spec. #

AIA #

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakesideFoodservice.com


Model  
163422

# Load-Master™

## Motorized Utility Cart

### Specifications:

Lakeside model 163422 is of welded stainless steel U-frame construction. Shelves are 14-gauge and U-frame is 1 1/4" x 1 1/4" x 1/8" angle stainless steel. The battery-operated power system features a 24-Volt DC transaxle drive and precision forward and reverse controls with auto-braking, and includes dual 35 Ah, AGM deep cycle batteries. Motorized cart has a speed range of 0.1 to 1.5 MPH at the low setting, and 0.1 to 3.0 MPH at the high setting. Battery charging system is 120 VAC, 1-phase, 47-63 Hz., with coiled cord and plug. Safety features include a 68 db. horn, emergency stop, keyed power-on lock, holding brake to keep unit from rolling down inclines when stopped, and automatic stop when operator releases control. A power axle release allows non-motorized use. Battery carriage features static release floor belt. Power wheels are 8" diameter flat-free non-marking with grip tread, and 8" casters are swivel with non-marking cushion-tread wheels.

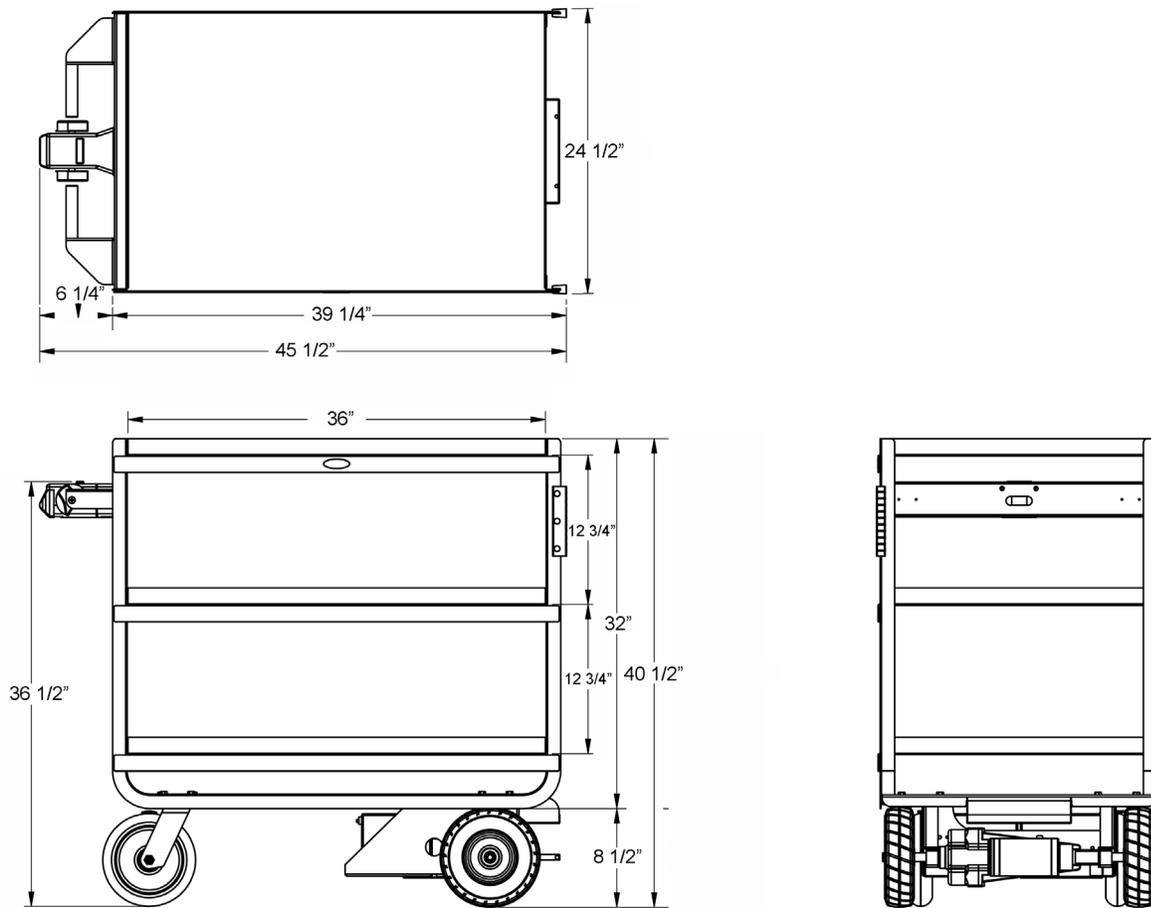

**Ship Weight - 252 Lb.**



Lakeside Manufacturing, Inc.  
4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.  
800-558-8565 • 414-902-6400 • Fax 414-902-6446  
info@eLakeside.com • www.eLakesideFooservice.com