



Noble Warewashing DTVL1 Select Ventless High Temperature Door Type Dishwasher - 208-240V, 1 Phase

#495NODTVL1

Item #: 495NODTVL1 Qty: _____

Project: _____

Approval: _____ Date: _____



Features

- Uses only 0.53 gallons of water per rack
- Cleans up to 38 racks per hour
- 4 cycle options for cleaning
- Softstart feature slowly builds speed to protect the motor and unit
- 208-240V, 1 phase

Certifications



Hardwired



Energy Star Qualified



3/4" Water Connection



ETL, US & Canada
Intertek



ETL Sanitation
Intertek


Technical Data

Width	28 Inches
Depth	32 5/8 Inches
Height	76 5/16 Inches
Dishwasher Height	Standard
Amps	38.26 - 44.14 Amps
Hertz	60 Hz
Phase	1 Phase
Voltage	208 - 240 Volts
Wattage	7.96 - 10.59 Kilowatts
Application	Dishwashers

Technical Data

Booster Tank Capacity	2.4 gal.
Booster Wattage	6.5 Kilowatts
Dishwasher Style	Straight
Features	Booster Heater Included Energy Star Qualified
High or Low Temp	High Temp
Horsepower	1 hp
Interior Clearance	17 Inches
Minimum Water Inlet Temperature	41 Degrees F
Number of Cycles	4 Cycles
Plug Type	Hardwire
Product Type	Dishwashers Warewashing Chemicals
Racks (per Hour)	38
Type	Single Rack Ventless
Wash Cycle Time	140 - 650 Seconds
Wash Tank Capacity	8.7 gal.
Water Inlet Size	3/4 Inches
Water Temperature	150 - 180 Degrees F
Water Usage	0.53 Gallons Per Rack

Plan View

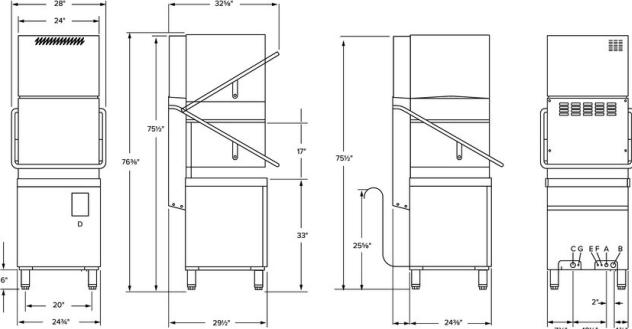

Notes & Details

Quickly, easily, and efficiently clean full racks of used dishes with this Noble Warewashing Select ventless high temperature door type dishwasher. Keeping your dishes and glasses clean is essential to the life of your business, and thanks to this durable unit, you can successfully clean up to 38 racks per hour with 0.53 gallons of water per rack! This ensures that you'll always be able to keep up with peak hours of service at your establishment.

This dishwasher has 4 wash cycles and a 17" clearance, which is convenient and ideal for high-volume dishwashing. Plus, the digital display provides easy-to-read information about temperature, errors, and functions. This dish machine includes a built-in detergent and rinse aid dispenser, and a 6.5kW booster heater with a 2.4-gallon capacity tank. It has an operating water temperature of 150 degrees Fahrenheit and a rinsing water temperature of 180 degrees Fahrenheit. This door type ventless dishwasher integrates the heat recovery system (SRS), which recycles steam energy to heat incoming water and keeps steam out when opening the door. This helps to reduce energy consumption and eliminates the need for a ventilation hood.

This dishwasher's Softstart feature allows the motor to start slowly to build up proper speed, helping to protect the ware from flying off the racks with aggressive water pressure at the beginning of the wash cycle. This feature also protects the unit's motor. Additionally, it has a wash tank capacity of 8.7 gallons. It requires a 1 phase, 208-240V electrical connection for operation.

⚠️ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.