


Justrite Safety Group

982 - BUBBLE TRAX® GRANDE™






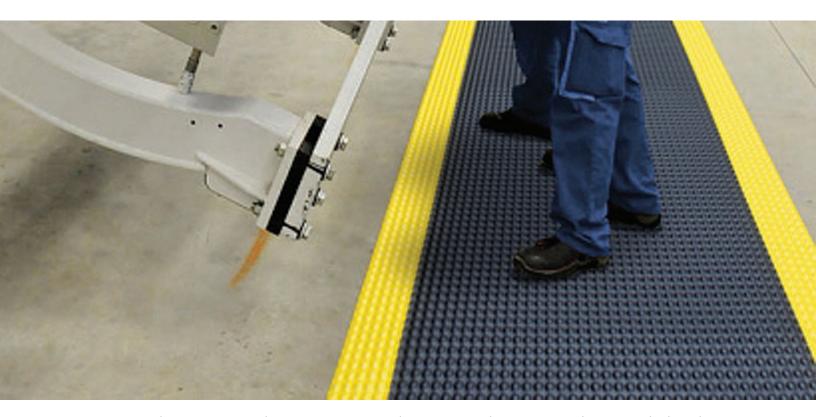

For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- Track record of manufacturing high quality mats for over seventy years
- All products are manufactured in ISO certified facilities
- Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries

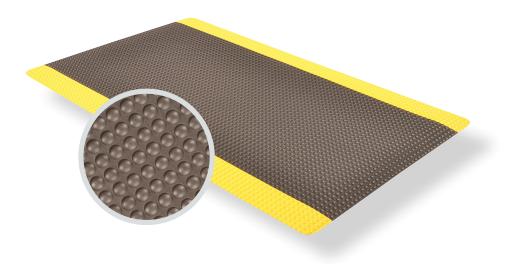

PRODUCT INFO

982 - BUBBLE TRAX® GRANDE™ is a unique high performance anti-fatigue floor mat with a bubble top surface design and is a full ONE-INCH thick providing the ultimate in ergonomic comfort and durability. Bubble Trax™ combines a heavy-duty vinyl top surface with a dense sponge backing utilizing the Notrax® exclusive UniFusion™ bonding process. The resulting finished product is virtually a single piece eliminating any possibility of de-lamination. Bubble Trax™ uses RedStop™ non-slip backing, a uniquely engineered technology that eliminates the slipping and sliding of Notrax® floor mats on all types of smooth floor surfaces such as vinyl composite tile, painted or epoxy coated concrete, vinyl sheet flooring, carpet, and ceramic tile.

Material: Vinyl Surface With Dense Closed PVC Foam Base

Features and Benefits:

- Heavy-duty vinyl bubble top surface combined with a dense closed cell PVC foam base provides added cushioning comfort
- UniFusion™ bond guaranteed for the life of the mat
- Redstop[™] non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)







WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov

SPECIFICATIONS

Stock Sizes 2'x3', 3'x5'

Roll Sizes 2'x75', 3'x75', 4'x75', 5'x75'
*Grey not available in 4'x75' and 5'x75'

Thickness 1"

Cut Lengths 2', 3', 4', and 5' widths (up to 75' long)
*Grey not available in 4' and 5' widths

Colors Black Black/Yellow Grey


Good

Better

Best

Superior

Performance: Wear Resistance Anti-fatigue Performance Slip Resistance



MODEL: 982

- suc
 - Work Stations
 - Packaging Areas
 - Assembly Lines
 - Pick Pack Aisles









TESTING DATA

Test	Test Description	Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	@ 20 lbs/sq. in 0.382 @ 40 lbs/sq. in 0.510
ASTM D-3884-01	Abrasion Resistance (Measured in weight loss)	@ 500 cycles - 0.2% @ 1000 cycles - 0.4%
ASTM C-1028-96	Static Coefficient of Friction	0.680
ASTM D-2240-02	Durometer / Hardness	Shore A - 90
ASTM D-1004-94α-03	Tear Resistance (Measured in Ibs.)	63.8 lbs
CPSC FF 1-70 (ASTM D2859)	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass

^{*}Testing performed by an independent test laboratory.

NOTRAX®

5655 West 73rd Street Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com





Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.