




Justrite Safety Group

193 - SUPERIOR IMPACT™ LOGO MAT

PRODUCT INFORMATION BROCHURE



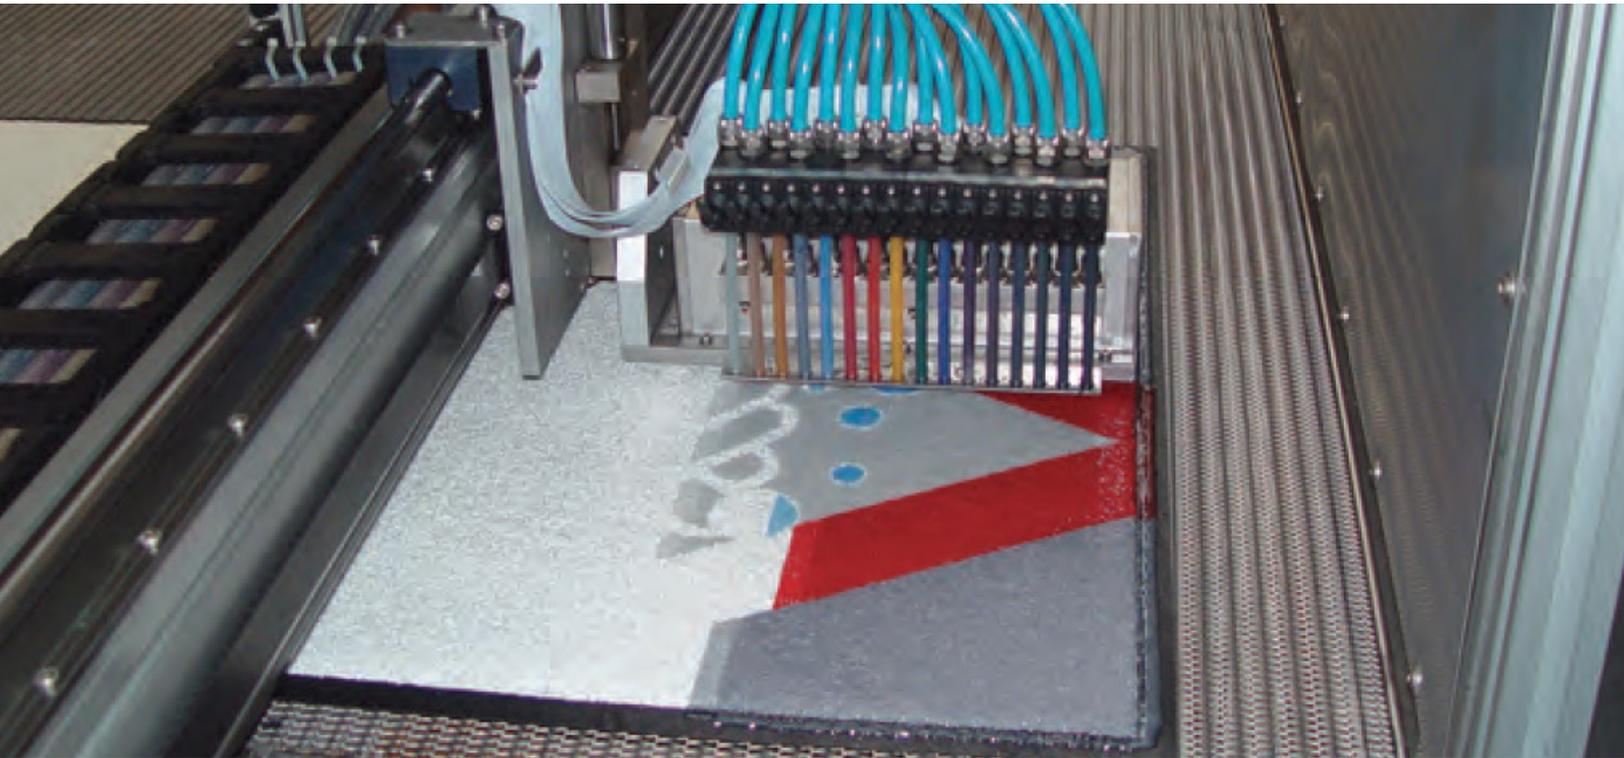

For over 70 years, the name Notrax[®] has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax[®] offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax[®] offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**



193 - SUPERIOR IMPACT™ LOGO MATS is a multi-functional entrance mat that stops dirt and debris while adding aesthetic appeal and promotes your brand/message. The mats are printed with a state-of-the-art dye-injection process that is entirely computer controlled. Dye is injected deep into the carpet pile for long-lasting vibrant color that resists fading over time. The mat itself is made from a high quality fiber with a heavy-duty vinyl backing that creates greater surface friction, greatly reducing mat movement on smooth floors such as wood, marble, tile, or concrete.

Material: Nylon Carpet W/Vinyl Backing

Features and Benefits:

- Dye-injection process for long lasting, vibrant color
- Color palette of 22 base colors
- 24 ounces of cut-pile nylon yarn per square yard provides increased moisture retention
- Vinyl backing ensure minimal buckling and mat movement



MODEL: 193

APPLICATIONS

- Retail
- Restaurants
- Hotels
- Corporate Offices

SPECIFICATIONS

Stock Sizes	2'x3', 3'x4', 3'x5', 4'x6', 4'x8', 5'x8', 3'x10', 4'x10', 4'x12'					
Thickness	3/8"					
Colors						
	Silver	Yellow	Blue	Tan	Grey	Gold
	Dark Grey	Orange	Dark Green	Blue Grey	Green	Rust
Light Blue	Red	Black	Olive Green	Wine	Purple	
Dark Blue	Brown	Teal	Beige			

Performance: Good Better Best Superior

Water Retention			
Crush Resistance			
Soil Resistance			
Function & Appearance			



Custom
 Medium Traffic

TESTING DATA

Test	Test Description	Results
ASTM D1894-08	Static and Kinetic Coefficients of Friction	Painted Concrete: Avg. Load 32.3 lbs; COF 0.65 Epoxy Concrete: Avg. Load 31.5 lbs; COF 0.63 VCT: Avg. Load 35.9 lbs; COF 0.72 Vinyl Sheet: Avg. Load 27.7 lbs; COF 0.55
ASTM D-5252-98	Accelerated Wear - 4,000 cycles (Hexapod Tumble Drum Tester)	Appearance: 3.2 Color: 3.0
ASTM D6540-00	Accelerated Soiling	Based on Visual Inspection 1.0 - Vacuum Rating 3.0 - Rating After Extraction
CPSC FF 1-70 ASTM D-2859	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass
ASTM D412-06	Breaking Load and Elongation	225.6 lbs/Inch ²
ASTM D3936-05	Delamination	Construction would not allow for delamination
ASTM D2240-02	Durometer (Hardness)	75
ASTM D1335-05	Tuft Bind	9.0 lbs.

* Testing performed by an independent test laboratory.

NOTRAX®

5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.