

Refrigerated Service Case



Conforms to NSF STD 7
TYPE II

- ☐ NR3640RSV
- ☐ NR4840RSV
- ☐ NR6040RSV
- ☐ NR7240RSV

Lengths include end panels
35-3/4"L x 33"D x 39-5/8"H
47-3/4"L x 33"D x 39-5/8"H
59-3/4"L x 33"D x 39-5/8"H
71-3/4"L x 33"D x 39-5/8"H

STANDARD FEATURES

- NOTE: Glass warranty only applicable to first point of delivery
- Breeze~E (Type-II) w/ EnergyWise s/c refrigeration
- (1) Level of clear glass shelving removable and adjustable on 1" centers
- Blue Fin coated coil
- Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.
- Condensate pan (self-contained refrig. only)
- Integrated average product temperature of 40°F or less
- LED top & shelf lights
- One piece formed ABS plastic tub
- One year parts & labor; 5 year compressor warranty
- Vertical, fixed front & side UV bonded frameless glass

Features	Standard	Options
EXTERIOR COLOR	☐ Black	☐ Painted (non-stock colors, specify RAL#) ☐ Painted (stock colors, specify RAL#) ☐ Stainless steel
INTERIOR COLOR	☐ Black	☐ NOTE: Interior color must be FDA & NSF approved ☐ Painted (stock colors, specify RAL#) ☐ Stainless steel
PANEL EXTERIOR	☐ Laminated (non-premium) Confirm pattern/grain direction	☐ Laminated (premium) Confirm pattern/grain direction ☐ Stainless steel
BASE SUPPORT	☐ Adjustable, locking casters	☐ 6"H stainless steel legs ☐ Shims (standard w/ remote)
END PANEL LEFT	☐ Full end panel	☐ No end panel w/ synchronized defrost
END PANEL RIGHT	☐ Full end panel	☐ No end panel w/ synchronized defrost
LOWER FRONT PANEL	☐ Black	☐ Painted (stock colors, specify RAL#) ☐ Stainless steel
LOWER REAR PANEL	☐ Black	☐ Painted (stock colors, specify RAL#) ☐ Stainless steel
UPPER REAR	☐ Clear glass rear sliding doors	☐ Reflective glass rear sliding doors
LIGHTS	☐ LED 3500K w/ frosted lens	☐ LED 3000K w/ frosted lens ☐ LED 4000K w/ frosted lens
ELECTRICAL CONNECT	☐ 6' Straight blade power cord (self-cont.)	☐ 6' Locking power cord (self-cont.) ☐ Electrical leads (remote)
REFRIGERATION	☐ Breeze~E (Type-II) w/ EnergyWise s/c refrigeration (rear access)	☐ Breeze~E (Type-II) w/ EnergyWise s/c refrigeration (front access) ☐ Remote w/thermostat, solenoid & TXV (front access) ☐ Remote w/thermostat, solenoid & TXV (rear access)
MISCELLANEOUS		☐ 14.5" Base height extension ☐ Rear door lock ☐ Second year parts & labor warranty (excludes compressor)
ACCESSORIES		☐ Clean Sweep® coil cleaner (n/a w/remote)

Option Notes: 1 - Cannot be combined w/ 6"H legs


Reveal®

Product Specifications


Intended Environment: Type II - Designed to operate in ambient conditions of 80°F and 60% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Warmest Avg Prod Temp ° F
1	Unpackaged refrigerated products	40

PLAN VIEW

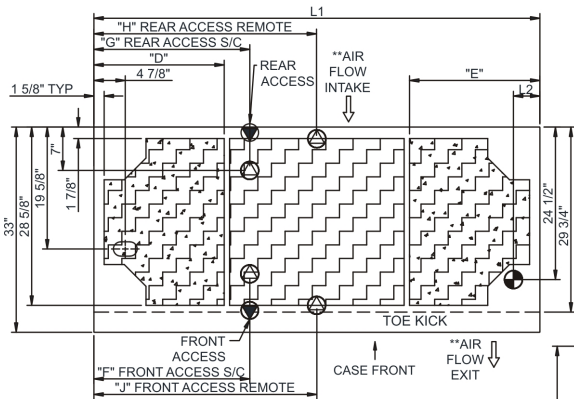

	"D"	"E"	"F"	"G"	"H"	"J"
NR3640RSV	N/A	N/A	7"	7"	17 7/8"	17 7/8"
NR4840RSV	9"	9"	12 3/4"	12 3/4"	23 7/8"	23 7/8"
NR6040RSV	9"	21"	12 3/4"	24 3/4"	29 7/8"	29 7/8"
NR7240RSV	21"	21"	25 1/8"	25 1/8"	35 7/8"	35 7/8"



	"A"	"B"	"C"
NR3640RSV	8"	17 3/4"	7 3/4"
NR4840RSV	14"	17 3/4"	7 3/4"
NR6040RSV	26"	17 3/4"	7 3/4"
NR7240RSV	26"	17 3/4"	7 3/4"


NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

SIDE VIEW

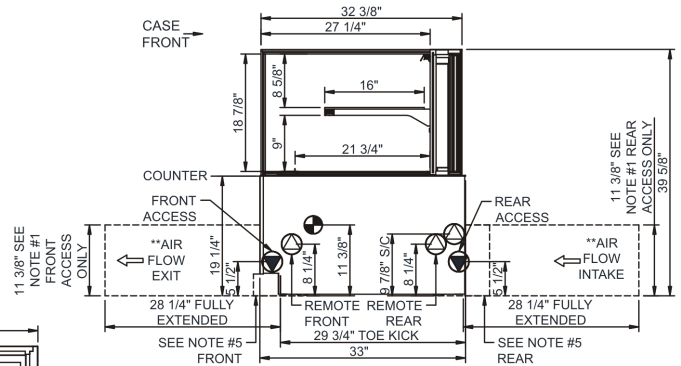

- NOTES:**
- 11 3/8" TALL, FULL WIDTH OF CASE OPENING IN CABINET OR COUNTER IS REQUIRED TO PULL OUT REFRIGERATION SYSTEM.
 - BACK OF COUNTER / CABINET MUST BE VENTED PROPERLY FOR ADEQUATE AIRFLOW TO CONDENSER.
 - **REPRESENTS REAR PULLOUT REFRIGERATION. AIR FLOW INTAKE AND EXIT DETAILS ARE REVERSED WITH FRONT PULLOUT REFRIGERATION OPTION.
 - SELF-CONTAINED ACCESS ONLY BY PULLING OUT CONDENSER UNIT.
 - 4" OPEN AREA CLEARANCE REQUIRED FOR AIR FLOW FRONT AND REAR OF CASE.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
NR3640RSV	N/A	35.75	4.13	Remote(Type I)	Circuit #1	110-120	1	60	1.08	32	2+G	Leads Single	24.00	778	720	800
				Remote(Type II)	Circuit #1	110-120	1	60	1.08	32	2+G	Leads Single	24.00	864	800	
				Self-Contained	Circuit #1	110-120	1	60	9.76	762	2+G	5-15P or L5-15P	N/A	N/A	N/A	
NR4840RSV	N/A	47.75	4.13	Remote(Type I)	Circuit #1	110-120	1	60	1.08	35	2+G	Leads Single	24.00	994	920	850
				Remote(Type II)	Circuit #1	110-120	1	60	1.08	35	2+G	Leads Single	24.00	1123	1040	
				Self-Contained	Circuit #1	110-120	1	60	9.76	765	2+G	5-15P or L5-15P	N/A	N/A	N/A	
NR6040RSV	N/A	59.75	4.13	Remote(Type I)	Circuit #1	110-120	1	60	1.38	52	2+G	Leads Single	20.00	1231	1140	1,050
				Remote(Type II)	Circuit #1	110-120	1	60	1.38	52	2+G	Leads Single	20.00	1382	1280	
				Self-Contained	Circuit #1	110-120	1	60	10.06	782	2+G	5-15P or L5-15P	N/A	N/A	N/A	
NR7240RSV	N/A	71.75	4.13	Remote(Type I)	Circuit #1	110-120	1	60	1.38	55	2+G	Leads Single	20.00	1469	1360	1,150
				Remote(Type II)	Circuit #1	110-120	1	60	1.38	55	2+G	Leads Single	20.00	1642	1520	
				Self-Contained	Circuit #1	110-120	1	60	9.86	774	2+G	5-15P or L5-15P	N/A	N/A	N/A	

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF 7
------------	--



In Accordance with
AHRI Std 1200

DOE 2017
Energy Efficiency
Compliant

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Back side of counter must be open or vented the full length of the unit to allow proper ventilation for the refrigeration system.
- 3) Glass warranty only applicable to first point of delivery.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.